



Option -PBRA2

Remote Electronic Flush Valve Pushbutton - In-Wall



-PBRA2 Shown with Standard Pneumatic Pushbutton

Remote Electronic Flush Valve Pushbutton - For In-Wall Installation

Electronic Flush Valve styles only. Intended for use with a Lav-Toilet Combination or Toilet Fixture to allow remote actuation of the Toilet Flush Valve by Staff. No Flush Control shall be accessible to the Cell Occupant. Remote Pushbutton Control prevents the flushing of evidence or contraband and reduces the potential for intentional clogging of the Toilet Fixture to create a flood condition.

Installation is intended within the wall outside of Holding Cell and requires appropriate conduit (by others) to connect Pushbutton Air-line Tubing or Wiring to the Electronic Valve Control Module. Remote Pushbutton must be within 50 feet of Electronic Valve Controller.

The MVCFV, MTPFV or EVSFV Electronic Control Module (typically installed within a Plumbing Chase, at or near the Toilet Fixture) must be within 50 feet of the Solenoid Flush Valve.

To ensure proper operation, the 24VAC Solenoid Flush Valve must be installed at the Toilet fixture per Manufacturers recommendations.

Lav-Toilet Combination Fixture must be specified with the optional -LPFV (Less Punching for Flush Valve). *Dual flush is not offered; Staff will have sole responsibility for flushing the Toilet fixture.*

Remote Pushbutton Assembly consists of a 5" square 14 gauge Type 304 Stainless Steel Plate with exposed surfaces polished to a #4 Satin Finish. The Plate includes vandal resistant stainless steel Fasteners. In-Wall Box assembly includes Mounting tabs and is fabricated of 18 gauge galvanized steel.

Electronic Flush Valve style shall be specified in the Fixture Product Submittal Selections. Refer to supplemental Flush Valve product Submittal for complete details.


Please visit www.acorneng.com for most current specifications.

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov





Remote Electronic Flush Valve Pushbutton - In-Wall

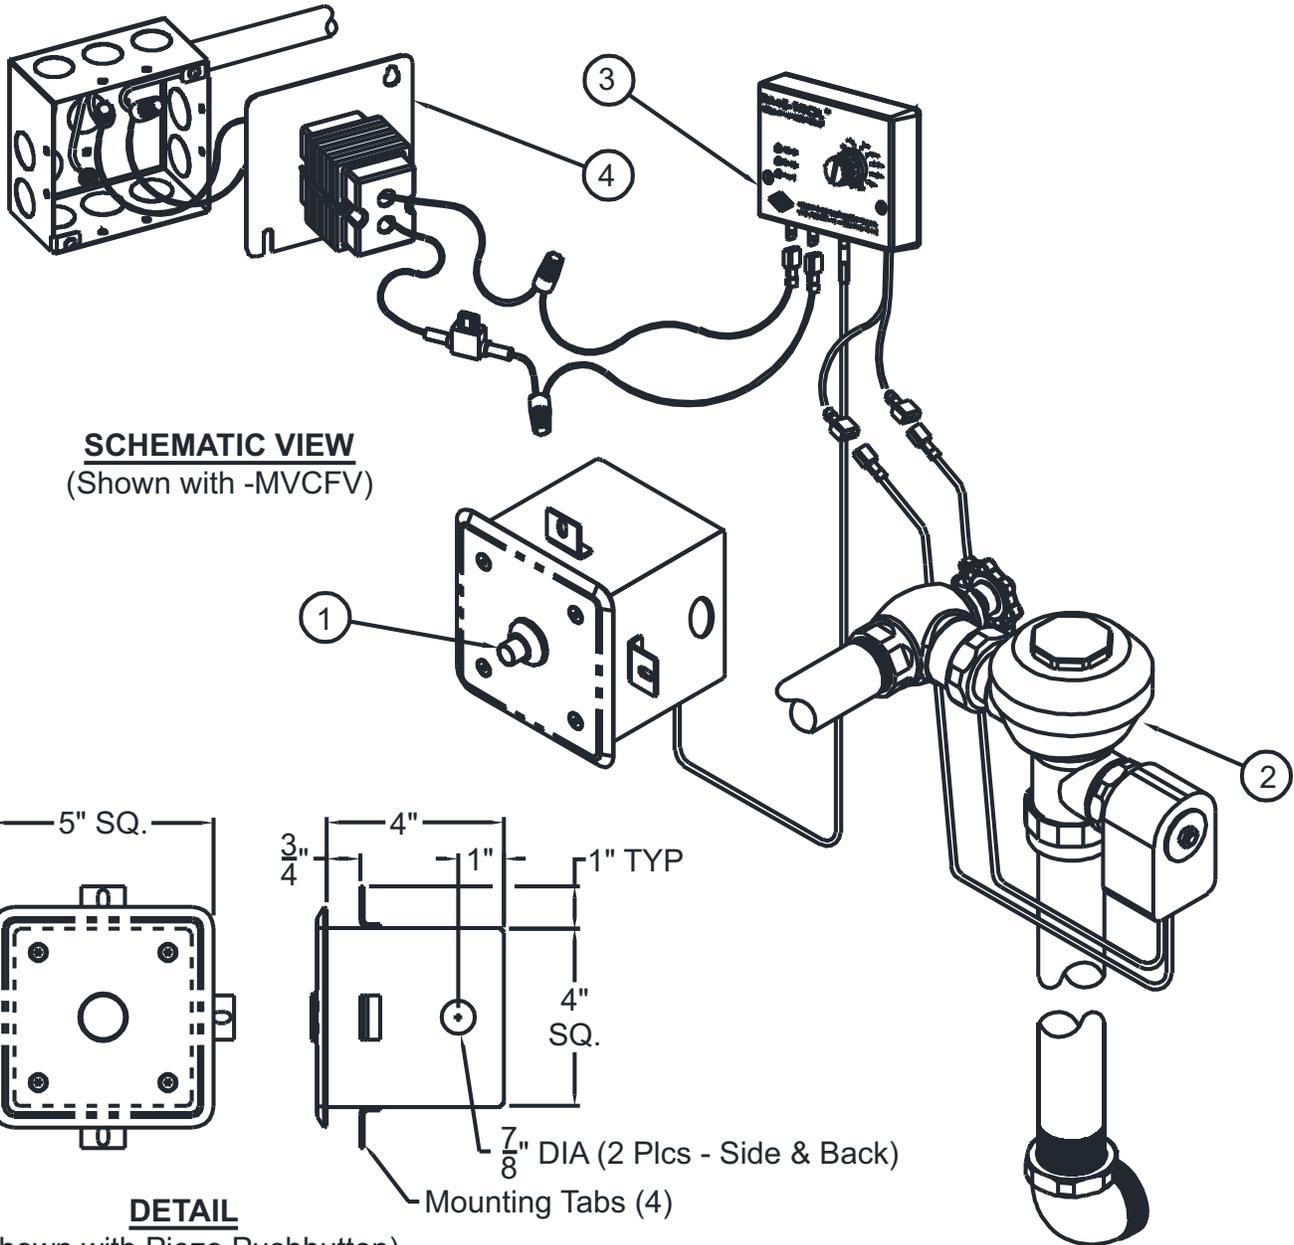

NOTES:

1. Remote Pushbutton Box for In-Wall Installation; Up to 50ft from Controller (In-Wall Conduit By Others Not Shown for Clarity)
2. Solenoid Flush Valve (Located at Toilet Fixture)
3. -MVCFV Modular Valve Controller Shown (Specify); Up to 50ft from Flush Valve
4. Optional -TF Transformer Shown (Must Specify)

Please visit www.acorneng.com for most current specifications.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

