




Secur-Care® - Ligature Resistant Seat LR1103-24-FM Series

Front Mount Ligature Resistant Fixed Shower Seat

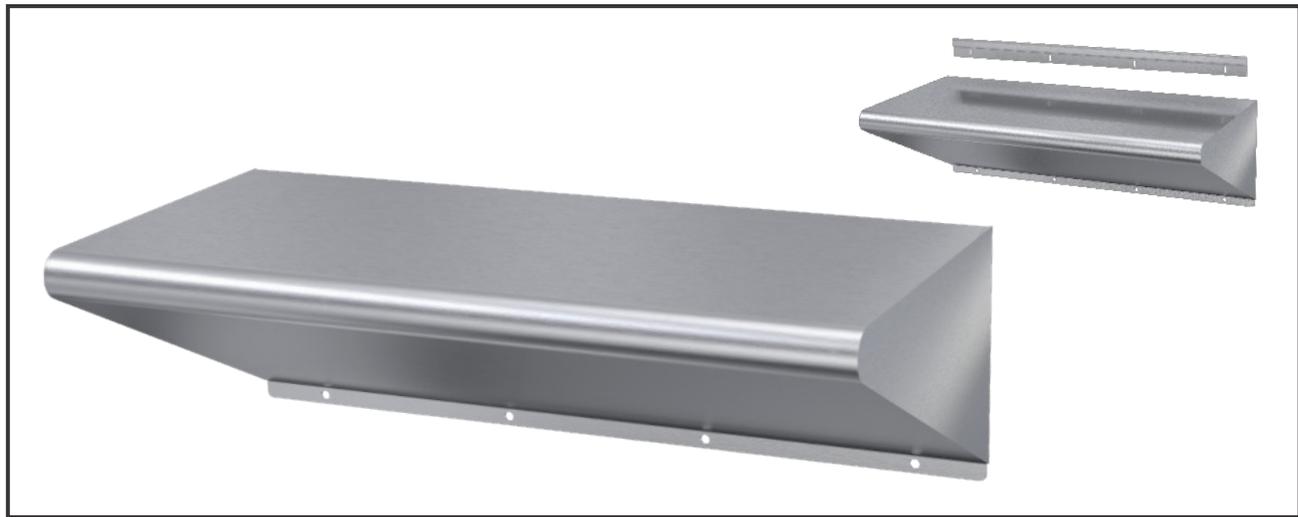

LR1103-33-FM

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Ligature Resistant Fixed Shower Seat - Front Mount

Stainless Steel Fixed Shower Seat is intended for installation in areas of high security and mounted to a finished wall from the front. Engineered to reduce possible risk of the fixture being used as a ligature device.

Ligature resistant design is based upon overall dimensions for Rectangular Shower Seat as shown in ADA Guidelines [610.3; 610.3.1]. Manufacturer makes no claims for ADA compliance due to fixed seat design.

Seat construction is welded, seamless and fabricated from 14 gauge type 304 stainless steel with exposed surfaces polished to a #4 satin finish.

Seat width is offered in sizes to suit a variety of applications including Shower Stall depths of 30" and 36". Width's offered allow for side wall mounting with a 3" gap at entry and Seat abutted against rear Wall (to eliminate wedging risk).

Mounting utilizes a concealed heavy gauge S-Clip Mounting Bracket for hanging Seat at top and includes an exposed Lower Flange for attaching Seat to wall. Recommended Wall Mounting Hardware and Wall Anchors shall be 3/8" diameter and are provided by others to suit wall construction and meet minimum load ratings of 250 lbs. Exposed Fasteners should be vandal resistant design.

Recommended installation should include appropriate Security Caulk product to eliminate any voids or crevices which may serve as ligature point. Position of Seat within a corner with an adjacent Wall may present a ligature point where an object may be wedged





BASE MODEL NUMBER

- LR1103-24-FM Shower Seat - 24" Width
- LR1103-27-FM Shower Seat - 27" Width
- LR1103-33-FM Shower Seat - 33" Width


PRODUCT OPTIONS

- EG Enviro-Glaze® Color Specify: _____
Refer to [LINK](#) for Powder Coat Colors

Please visit www.acorneng.com for most current specifications.

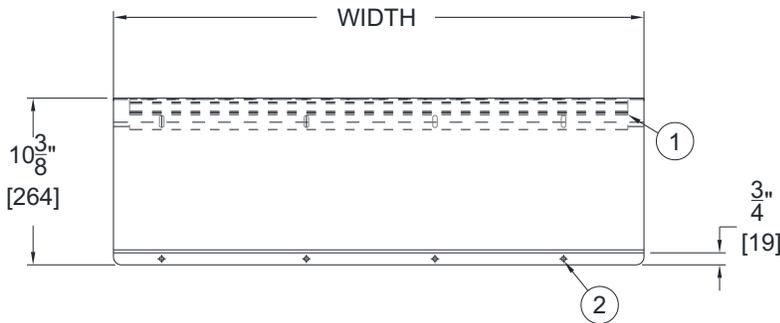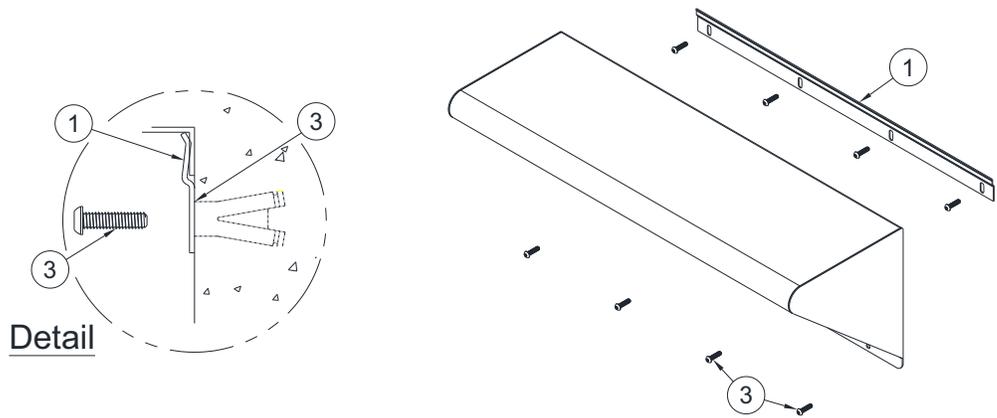

FRONT VIEW

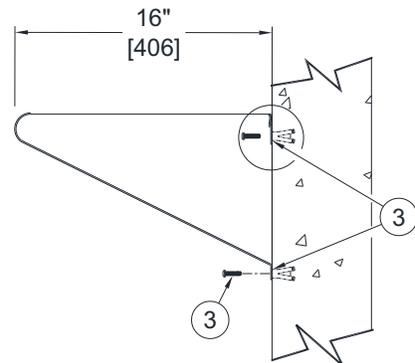

SIDE VIEW

Notes:

1. S-Clip Mounting with 7/16" Dia x 3/4" long slots
2. 7/16" Dia lower mounting points (4 places)
3. Wall Anchoring Hardware (By Others)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2004 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>