

## GR Series

### MODEL GRT75-PF OUTDOOR PET FOUNTAIN

#### STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 Gauge, Type 304 stainless steel bowl
- Heavy Gauge, Type 304 steel receptor, corrosion and scratch resistant finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer

#### SUGGESTED SPECIFICATIONS

Model GRT75-PF is an on-the-floor, outdoor pet fountain intended for wall mounting. The unit shall be made from an 18 gauge, Type 304 stainless steel bowl mounted into a green powder coated heavy gauge, heavy duty stainless steel receptor. Unit shall be activated by a side mounted, foot operated, self-closing button, and requiring less than 5 pounds of force to operate. Internally mounted valve includes an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61.



#### MODEL:

(Must Specify)

- GRT74-PF Satin stainless finish
  - GRT75-PF Green powder-coated (Shown)
  - GRT76-PF Red powder-coated
  - GRT77-PF Blue powder-coated
- Custom color finishes available upon request

#### OPTIONS

(additional costs may be incurred)

- FRU1 Underground freeze-resistant valve for one bowl <sup>1</sup>
- NP1 Non-pollutable, freeze resistant valve <sup>1</sup>
- RFS Round free standing bowl

#### Options Notes:

<sup>1</sup> See separate option sheet.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



Recyclable Product



Water Conserving Product

**Product Warranty**



**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of  
**MORRIS GROUP**  
INTERNATIONAL

**IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU, -NP" WILL DIFFER FROM STANDARD. REFER TO FRU FREEZE RESISTANT INSTALLATION DETAILS.**



**GR Series**  
**MODEL GRT75-PF**  
**OUTDOOR PET FOUNTAIN**

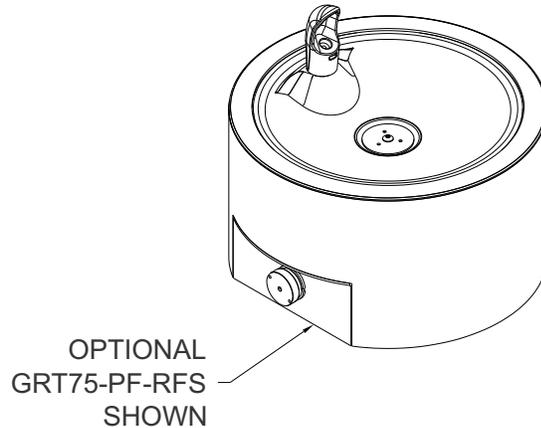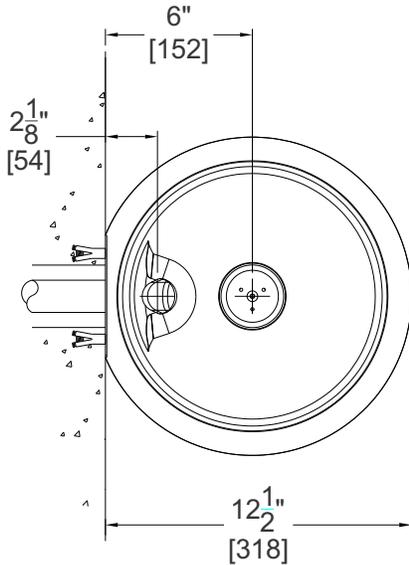

\* Valve specifications:  
Minimum/Maximum Pressure  
30 to 100 psi.

**GENERAL NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM].
2. STOP VALVE NOT PROVIDED.

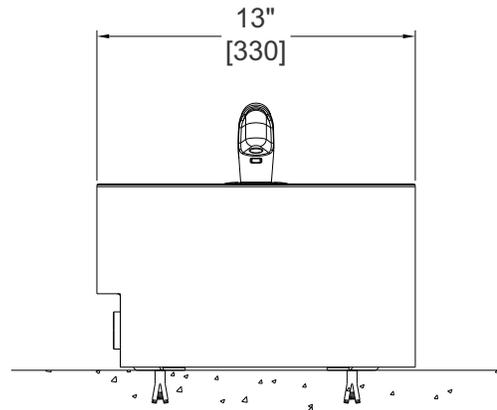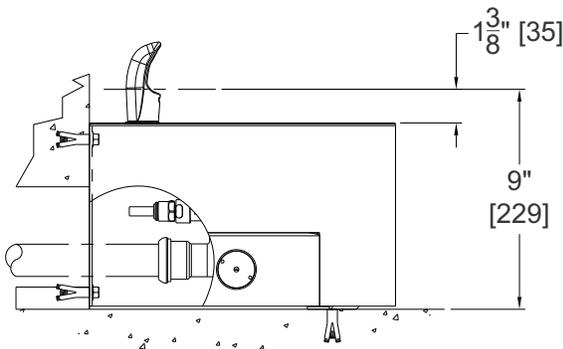

**SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

*All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock<sup>®</sup> assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock<sup>®</sup> Mfg., Member of Morris Group International<sup>®</sup>. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.*