



Care-Ware® Model Options

Please visit www.acorneng.com for most current specifications.

-SUG

Swing-Up Grab Bar -

Provides a type 304 stainless steel grab bar that may be manually swung up and out of the way for approach or departure. Grab bar provides support in the horizontal position.




-SUG

-VF

Foot Operated Valve Control For Lavy -

Provides a hands free alternative to -SO Sensor Operated valve. The flip-up design make for easy cleaning of the floor in front of unit.

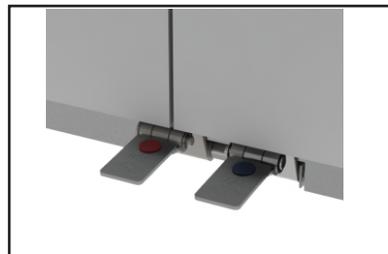

-VF

-W03

3" Toilet Trapway In Lieu of 2-3/8" Trapway-

This option provides a 3" O.D. Toilet bowl P-trap in lieu of standard 2-3/8" O.D. P-trap allows for passage of a 2-5/8" diameter; however, it requires a 3.5 GPF flush valve to operate. The waste outlet rough-in location will remain the same as standard.



-W03

Note: See individual specification sheets for available options. Please visit www.acorneng.com for most current specifications.

CW-7

New: 03/27/12

Care-Ware®
Model Options