


**SPECIAL PURPOSE DRAINS  
 STAINLESS STEEL - CARBON STEEL**

**HEAVY DUTY DRAIN WITH FREE STANDING SEDIMENT BUCKET**

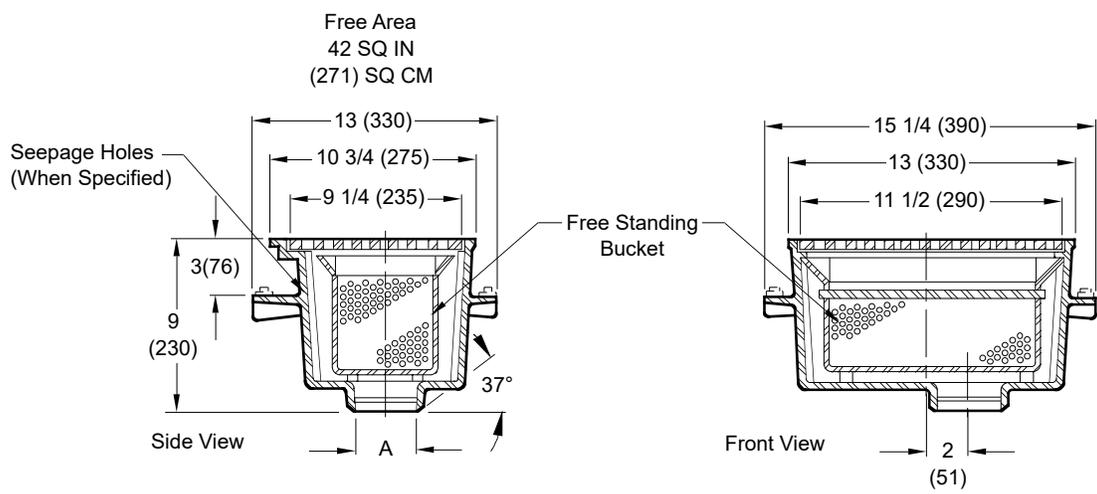

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

Fig. 9755BW . . . . BUTT WELD OUTLET (Schedule 40 Regularly Furnished)  
 Fig. 9755Y . . . . NO-HUB OUTLET

**REGULARLY FURNISHED:**

Fabricated Type 304 Rough Finish Stainless Steel Body with Sediment Bucket and Heavy Duty Loose Set Polished Bronze Grate.

**VARIATIONS:**

- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- 90° Side Outlet (Specify Fig. 9759)
- Flashing Clamp with Seepage Holes -C
- Seepage Holes -WSH
- BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40 or -S80)

**OPTIONAL MATERIALS:**

- A-27 Carbon Steel -A27
- CF8 (Equivalent to Type 304) Stainless Steel Grate -SSG
- CF8M (Equivalent to Type 316) Stainless Steel Grate -316
- Nickel Bronze Grate -NB
- Stainless Steel Satin Finished Grate -SFG

**Design Pressures and Temperatures**

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER  
**S9755**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**11-12-84**

APPROVED BY:  
**T.D.**

CHECKED BY:  
**VGD**

DRAWN BY:  
**CMB**

**9755**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

FIGURE NUMBER	M L K J	2-24-25 10-16-24 8-28-23 2-16-22	Revised Reg. Furn. Revised Variations Removed Function Added NO-HUB Outlet Option	HS HS HS KK	CB JT CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>9755</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY				