


FLOOR DRAIN

Load Rating: Non-Traffic

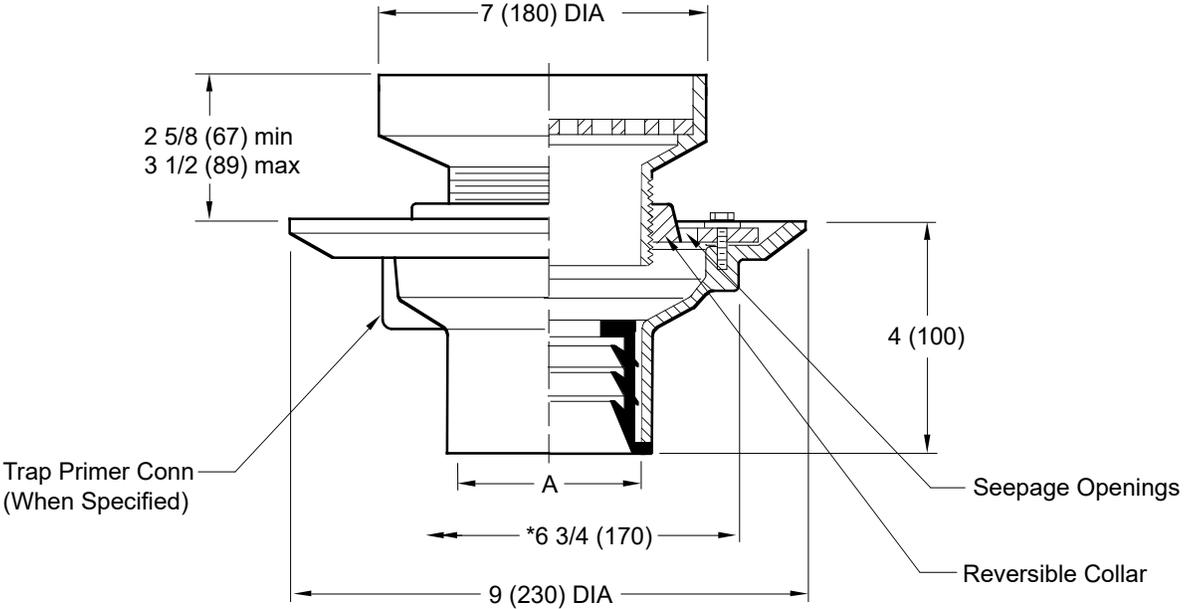

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

Fig. 2005Y (-F37) NO-HUB OUTLET

NOTE: Dimensions shown in parentheses are in millimeters.
NOTE: * MIN 6 3/4 (170) hole required for core drilled applications.

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar, Adjustable Nickel Bronze Strainer Head as Indicated by Suffix Letter Selected. Flush with Floor Funnel with anti-Splash Rim and Grate.

VARIATIONS:

- Trap Primer Connection -P050 1/2" (13)& -P075 3/4" (19)
- Vandal Proof Screws -U
- L Speedi-Set® Service Weight 02(50), 03(75) & 04(100) sizes only
- LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04(100) sizes only
- Quad Close Trap Seal (Specify Fig. 2692)
- Sediment Bucket -B

OPTIONAL MATERIALS:

- Bronze Body -BB
- Chrome Plated Top -CP
- Galvanized Cast Iron Body -G
- Polished Bronze Top -PB

DRAWING NUMBER: **S2005 (-F37)**
 SIZE: **A**
 SCALE: **NONE**
 DATE: **6-3-02**
 APPROVED BY:
 CHECKED BY:
 DRAWN BY: **RN**
2005 (-F37)
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

G F E D	5-21-24 3-10-23 7-23-19 06/14/19	Revised Variations Added @ to "Speedi-Set" Added Load Rating Removed Function	HS KK MW MW	KV CL JM JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2005 (-F37)
REV.	DATE	DESCRIPTION	BY	CKD. BY			