



1. WITH FIXTURE INSTALLED, REMOVE AND DISCARD EXISTING ACCESS PANEL AND MOUNTING HARDWARE.

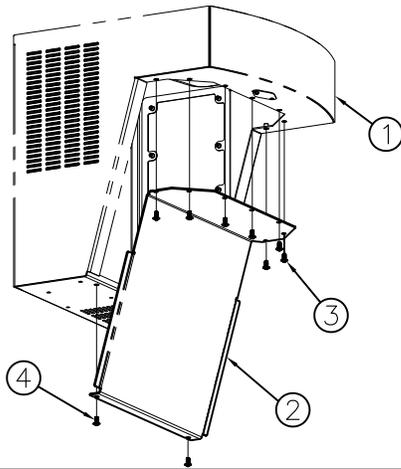

- ① EXISTING FIXTURE
- ② EXISTING ACCESS PANEL
- ③ EXISTING MOUNTING HARDWARE
- ④ EXISTING KNEE PANEL HARDWARE

2. LOCATE AND INSTALL -SK9 SKIRT ASSEMBLY TO EXISTING FIXTURE USING #10-32 TRUSS HEAD SCREWS (PROVIDED).

- ① EXISTING FIXTURE
- ② -SK9 SKIRT ASSEMBLY
- ③ 10-32 TRUSS HEAD SCREW

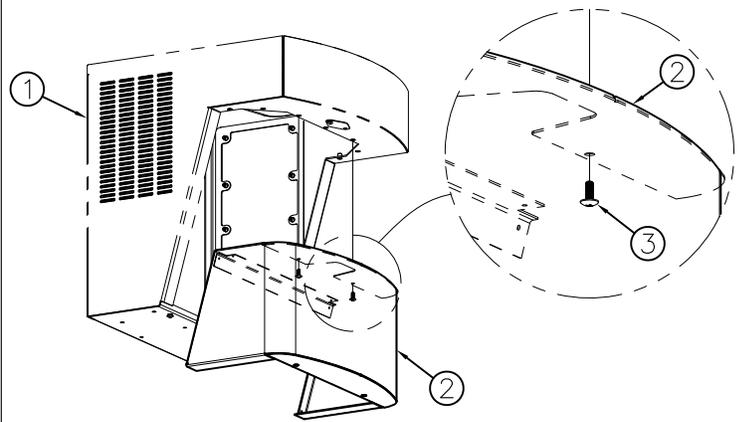

3. LOCATE AND INSTALL -SK9 FRONT KNEE PANEL TO -SK9 SKIRT ASSEMBLY AND EXISTING FIXTURE USING #10-32 TRUSS HEAD SCREWS (PROVIDED) AND EXISTING KNEE PANEL HARDWARE.

- ① EXISTING FIXTURE
- ② -SK9 SKIRT ASSEMBLY
- ③ -SK9 FRONT KNEE PANEL
- ④ #10-32 TRUSS HEAD SCREW
- ⑤ EXISTING KNEE PANEL HARDWARE

