


FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

8 1/2" (215) ROUND MEDIUM DUTY TOP

Free Area
 20.50 SQ IN
 (132) SQ CM

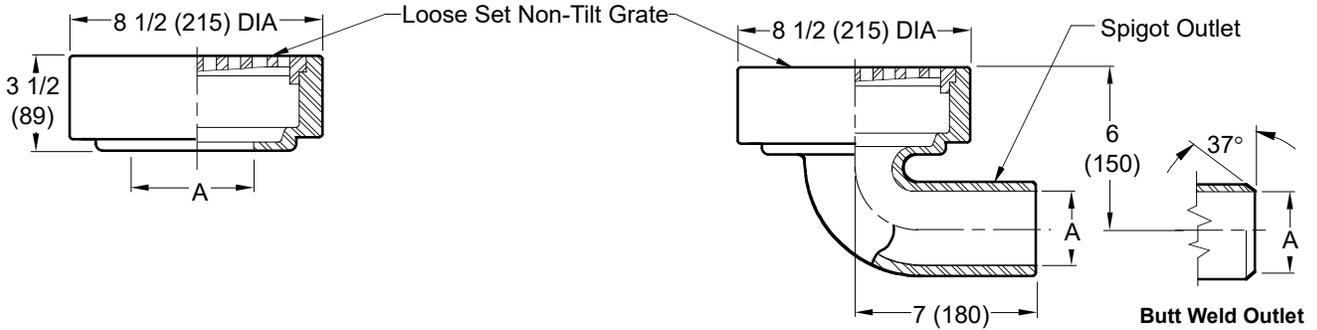

A (Pipe Size) = 02(50), 03(75) or 04(100)

Fig. 9713BW . . . BUTT WELD OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

Fig. 9718S . . . SPIGOT OUTLET

Schedule 40 Regularly Furnished

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body and Loose Set Non-Tilt Grate.

VARIATIONS:

- 4" (100) Extension -E04
- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- Closure Plug and Gasket Available in Stainless Steel -XPSS or Plastic -XPP
- Closure Plug with 3/4"(19) Test Plug -TP (Specify Material)
- Flat Bottom Strainer -FBS
- Satin Finish Top -SF
- Sediment Bucket -B
- Vandal Proof Grate -U
- BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40 or -S80)

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- Cast Iron Grate -CIG
- CF8M (Equivalent to Type 316) Stainless Steel -316
- Nickel Bronze Grate -NB
- Polished Bronze Grate -PB

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

H
 DRAWING NUMBER S9713
 SIZE A
 SCALE: NONE
 DATE: 11-12-84
 APPROVED BY: TD
 CHECKED BY: VGD
 DRAWN BY: PJ
 9713, 9718
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9713, 9718
	10-16-24 8-28-23 10-18-11 4-28-06	Revised Variations Removed Function Added Note Revised Variations	HS HS TBW RN	JT CL CL CL			