


# FLOOR OR SHOWER DRAIN WITH ADJUSTABLE STRAINER HEAD

## FLASHING STRAINER TYPE

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

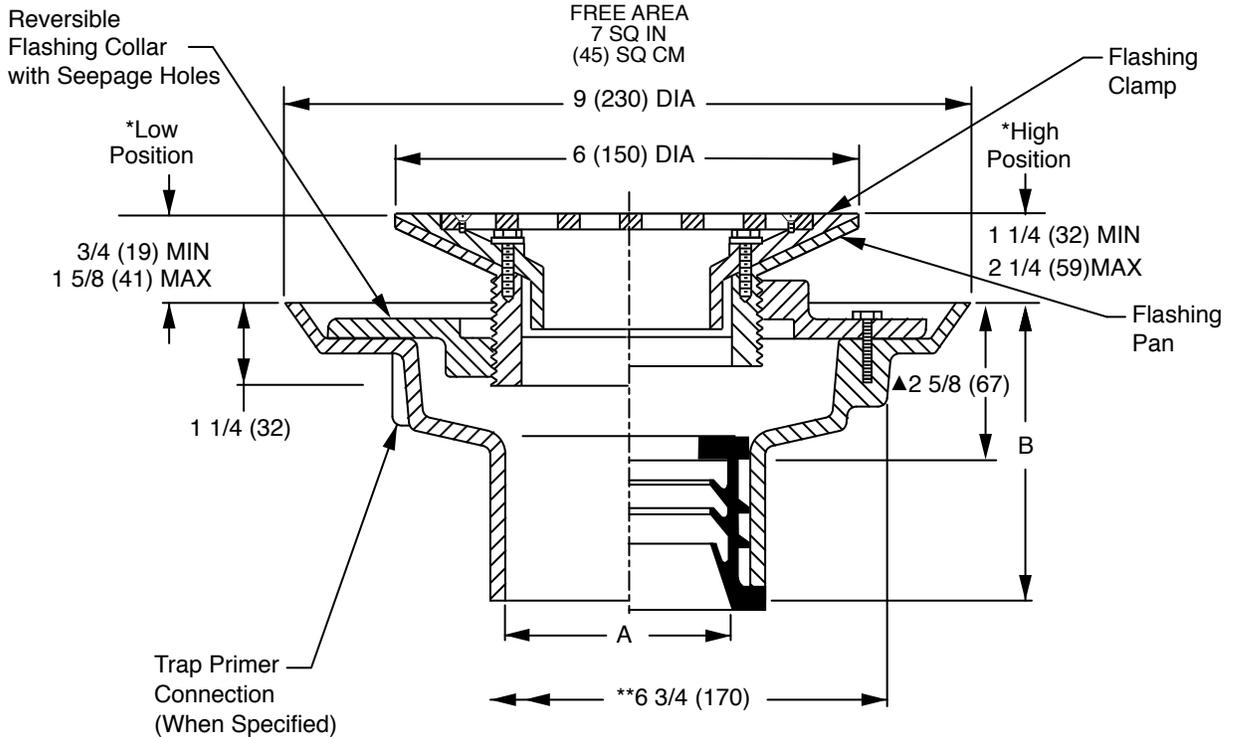

**NOTE:** When installing in an above grade floor, a waterproofing membrane is to be ran up to and over the drain body flange and clamped with reversible flashing collar. Membrane covering the center of drain body is to be trimmed to ensure flow through the drain is not blocked or obstructed.

- Fig. 2051Y..... NO-HUB Outlet
- Fig. 2051C..... Caulk Outlet

A SIZE	02(50), 03(75), 04(100), 05(125) or 06(150)
B	04(100 for NO-HUB, Caulk and Speedi-Set®, 3(76) for Threaded

▲ This dimension to internal stop of Speedi-Set® Gasket  
 \* Collar is reversible to obtain extreme high and low strainer positions.  
 \*\* MIN 6 3/4"(170) hole required for core drilled application.  
**NOTE:** 05(125) and 06(150) outlet size available in NO-HUB only.

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Flashing Collar and Adjustable Flashing Type Nickel Bronze Strainer.

**NOTE:** Dimensions shown in parentheses are in millimeters.

**VARIATIONS:**

- L Speedi-Set® Service Weight 2(50), 3(75) & 4"(100) only
- LXH Speedi-Set® Extra Heavy 2(50), 3(75) & 4"(100) only
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- Vandal Proof Screws -U
- T Threaded Outlet

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron Body -G
- Polished Bronze Strainer -PB
- Chrome Plated Strainer -CP

E  
 DRAWING NUMBER s2051  
 SIZE A  
 SCALE: NONE  
 DATE: 4-7-08  
 APPROVED BY: CEL  
 CHECKED BY: CL  
 DRAWN BY: TBW  
 2051  
 FIGURE NUMBER

E	3-10-23	Added @ to "Speedi-Set"	KK	CL
D	9-12-19	Revised Note	MW	CL
C	8-26-19	Added Note, Rev. Drawing	MW	CL
B	7-19-19	Added Load Rating	MW	JM

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER	2051
---------------	------