MILD CLIMATE ANTI-SIPHON SILLCOCK
DUAL CHECK VALVE - BACKFLOW PROTECTED

FUNCTION: For installation in interior and exterior wall locations of buildings that are not subject to freezing. Dual Check Valve prevents backflow due to low head pressure and conforms to the requirements of ASSE Standard 1052.
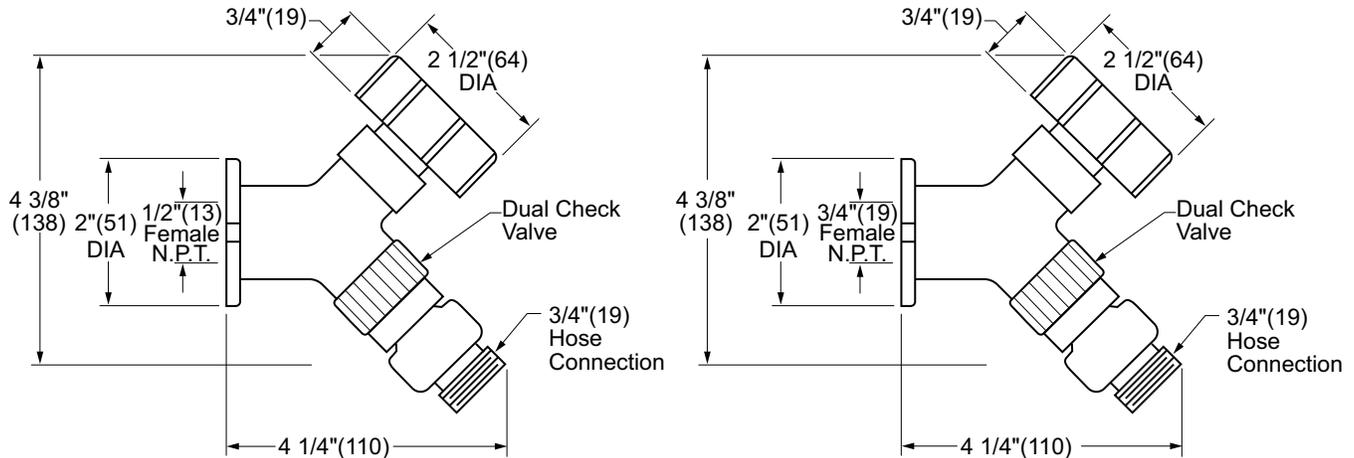

☐ Fig. M-3672 (-BFP).........1/2"(13) Inlet   ☐ Fig. M-3673 (-BFP).........3/4"(19) Inlet

NOTES:
1. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
2. The Dual Check Valve may discharge water to prevent backflow. Do Not install where spillage may cause water damage.
3. Dimensions shown in parentheses are in millimeters.
4. **FOR IRRIGATION PURPOSES ONLY.**

REGULARLY FURNISHED:
Hose Valve has a Rough Finish Brass Body
Removable Wheel Handle, "T" Handle Key,
NPT Female Threaded Inlet Size Indicated
by Figure Number Selected and ASSE 1052
Dual Check Valve with 3/4"(19) Hose Connection.

OPTIONAL MATERIALS:
☐ Rough Chrome Plated -CR

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL

M-3672-BFP, M-3673-BFP   *REV. 12/1/2025*