

G
 DRAWING NUMBER s5672, 5673
 SIZE A
 SCALE: NONE
 DATE: 6-17-11
 APPROVED BY: CL
 CHECKED BY: CL
 DRAWN BY: TBW
 FIGURE NUMBER 5672, 5673

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



CUSTOMER DRIVEN SINCE 1926
 MEMBER OF:

LOCATION

MILD CLIMATE ANTI-SIPHON SILLCOCK

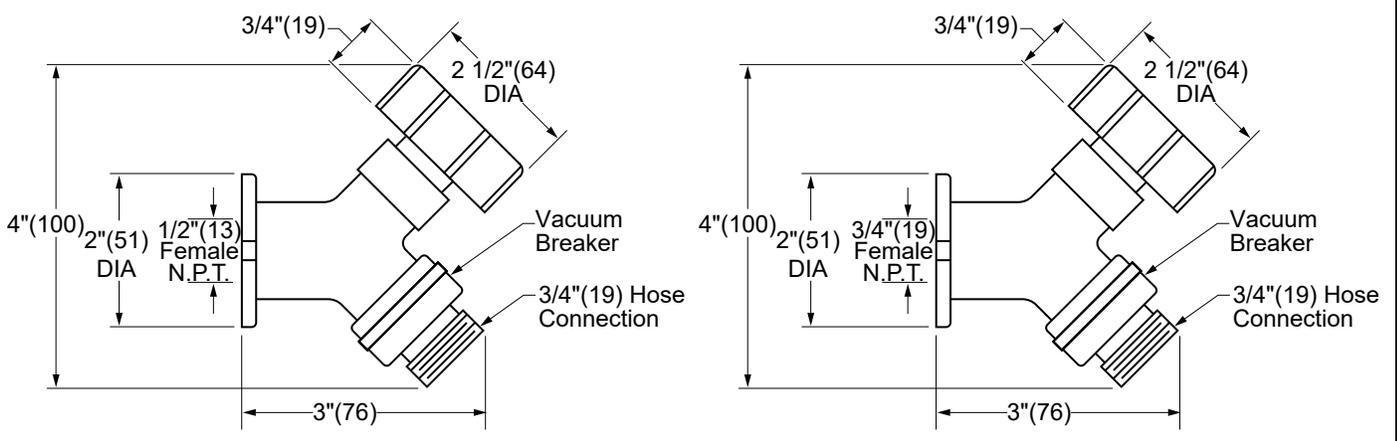


Fig. 5672 1/2"(13) Inlet
 Fig. 5673 3/4"(19) Inlet

NOTES:

1. The AB100, AB1953, California Lead Law, and NSF/ANSI Standard 61 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
2. Dimensions shown in parentheses are in millimeters.
3. **FOR IRRIGATION PURPOSES ONLY.**
4. Temperature Range: 33.0°F to 140.0°F (0.6°C to 60.0°C).

REGULARLY FURNISHED:

Hose Valve has a Rough Finish Brass Body
 Removable Wheel Handle, "T" Handle Key,
 NPT Female Threaded Inlet Size Indicated
 by Figure Number Selected and ASSE 1011
 Vacuum Breaker with 3/4"(19) Hose Connection.

OPTIONAL MATERIALS:

Rough Chrome Plated -CP

Installer is responsible for providing a 100% watertight positive seal at the hydrant to wall interface. Seal all the flange with an appropriate sealant recommended by a sealant manufacturer. NOTE: Jay R. Smith does not warrant the performance or life expectancy of the sealant material.

NOTE: Dimensions shown in Parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							5672, 5673