


HEAVY DUTY FLOOR DRAIN

Free Area
45 SQ IN
(290 SQ CM)

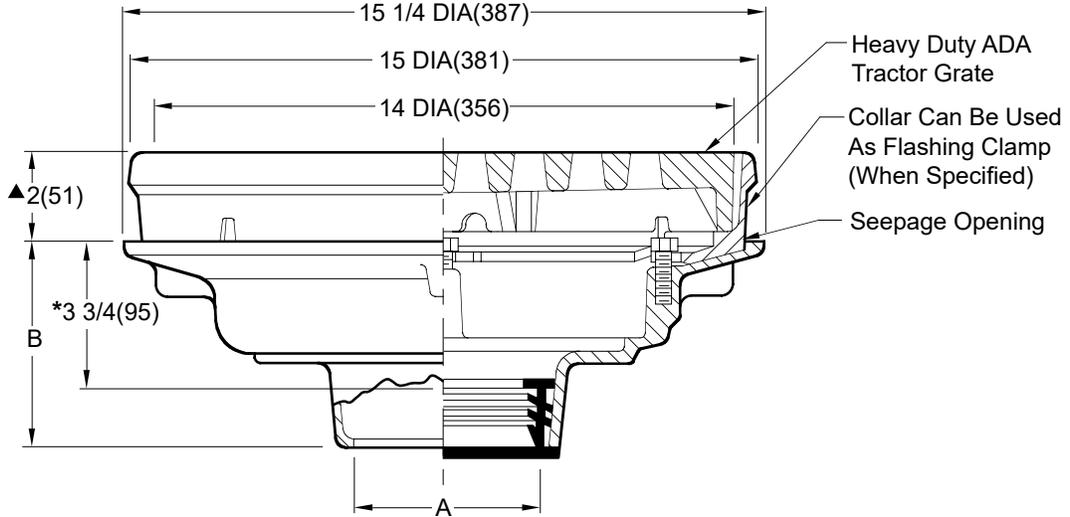

- Fig. 2290C . . . CAULK OUTLET
- Fig. 2290T . . . THREADED OUTLET
- Fig. 2290Y . . . NO-HUB OUTLET

*This dimension to internal stop of Speedi-Set® gasket.

▲Add 1/4"(6) when bronze top is specified.

A SIZE	02(50), 03(75), 04(100), 05(125) or 06(150)	08(200)	10(250)
B	5(127) for Caulk, NO-HUB and Speedi-Set® 3 3/4(95) for Threaded	6(150)	6(150)

REGULARLY FURNISHED:
Duco Cast Iron Body, Flashing Collar and Heavy Duty ADA Tractor Grate.

VARIATIONS:

- Dome Bottom Strainer -DBS
- Dome Grate -D
- Secondary Strainer -FBS
- Side Outlet
- Square Top -S
- Vandal Proof -U
- L Speedi-Set® Service Weight (02(50), 03(75) & 04"(100) sizes only)
- LXH Speedi-Set® Extra Heavy (02(50), 03(75) & 04"(100) sizes only)
- Bucket -B
- Quad Close Trap Seal (Specify Fig. 2692)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Nickel Bronze Heel Proof Top -NBHP
- Polished Bronze Heel Proof Top -PBHP

NOTE: Floor drains or area drains used to drain areas subject to rainfall should have an open area equal to twice the cross sectional area of the connecting pipe.

NOTE Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S2290**
 SCALE: **NONE**
 DATE: **10-9-86**
 APPROVED BY: **TD**
 CHECKED BY: **VGD**
 DRAWN BY: **WAS**
 FIGURE NUMBER **2290**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

G	2-24-25	Revised Optional Materials	HS	CL	WEIGHT	VOLUME	FIGURE NUMBER
F	6-23-23	Revised Variations, Added Fig.	HS	CL	POUNDS	CUBIC FEET	2290
D	3-10-23	Added ® to "Speedi-Set"	KK	BW			
	2-4-16	Revised Table, Added Note	TBW	BW			
REV.	DATE	DESCRIPTION	BY	CKD. BY			