

AT SeriesMEMBER OF

MORRIS GROUP
INTERNATIONAL®**Acoustical Tile Access Doors**

Doors are designed for use with acoustical tile or gypsum board walls and ceilings. The door is engineered to install flush, virtually concealed. Door is recessed 5/8" to accept acoustical tile or gypsum board.

Door is 16 gage and **frame** is 16 gage, galvannealed steel with a white prime coat finish.

Concealed Hinge operates completely out of sight so that only the metal thickness of the door and frame is visible.

Latch is screwdriver operated.

Guide Specification

Provide Elmdor® AT Series, Acoustical Tile Access Door (specify model number and options). Access door shall be fabricated from 16 gage and frame from 16 gage, galvannealed steel with a white prime coat finish. Door shall be recessed 5/8" to accept acoustical tile or gypsum board. Hinge shall be concealed type. Latch shall be screwdriver operated.

Member of U.S. Green
Building Council**AT**

Revised: 08/31/18

Recyclable
Product




MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

 AT Acoustical Tile Access Door

Suffix Options

<input type="checkbox"/> -AKL	Allen Key Latch
<input type="checkbox"/> -GB	Galvanized Drywall Bead
<input type="checkbox"/> -CL	Cylinder Lock (one per door)
<input type="checkbox"/> -CLD	Cylinder Lock with Dust Shutter (one per door)
<input type="checkbox"/> -SS	Stainless Steel Construction (Type 304 No. 4 Satin Finish)


STANDARD AVAILABLE SIZES

Special sizes available upon request.


NOMINAL DOOR SIZE (W X H)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
AT 8" x 8"	8-1/8" x 8-1/8"	1	4 lbs.
AT 12" x 12"	12-1/8" x 12-1/8"	1	5.5 lbs.
AT 12" x 24"	12-1/8" x 24-1/8"	2	9.5 lbs.
AT 16" x 16"	16-1/8" x 16-1/8"	2	8.5 lbs.
AT 18" x 18"	18-1/8" x 18-1/8"	2	10 lbs.
AT 24" x 24"	24-1/8" x 24-1/8"	4	16 lbs.
AT 24" x 36"	24-1/8" x 36-1/8"	5	24.5 lbs.

NOTES:

1. TILE, BY OTHERS
2. CONCEALED HINGE
3. MOUNTING HOLES
4. SCREWDRIVER OPERATED LATCH
5. FRAME

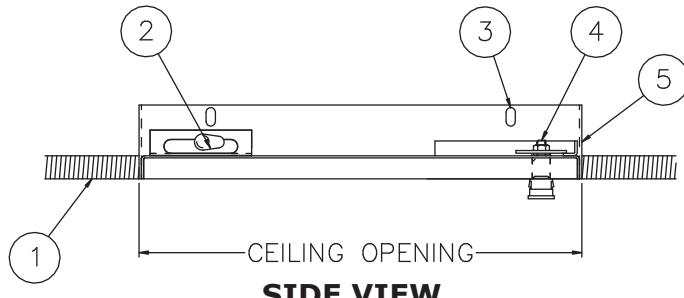

SIDE VIEW

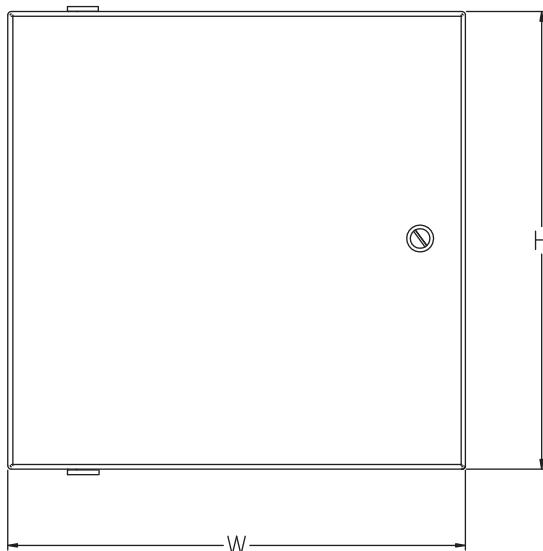

FRONT VIEW

 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

AT

Revised: 08/31/18