

K

**SMITH® JAY R. SMITH MFG. CO.®**  
 MEMBER OF MORRIS GROUP INTERNATIONAL  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION


# GARAGE AND INDUSTRIAL FLOOR DRAINS

## EXTRA LARGE BUCKET DRAIN

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area  
 63 SQ IN  
 (406) SQ CM

Flashing Flange and Clamp  
 (When Specified)

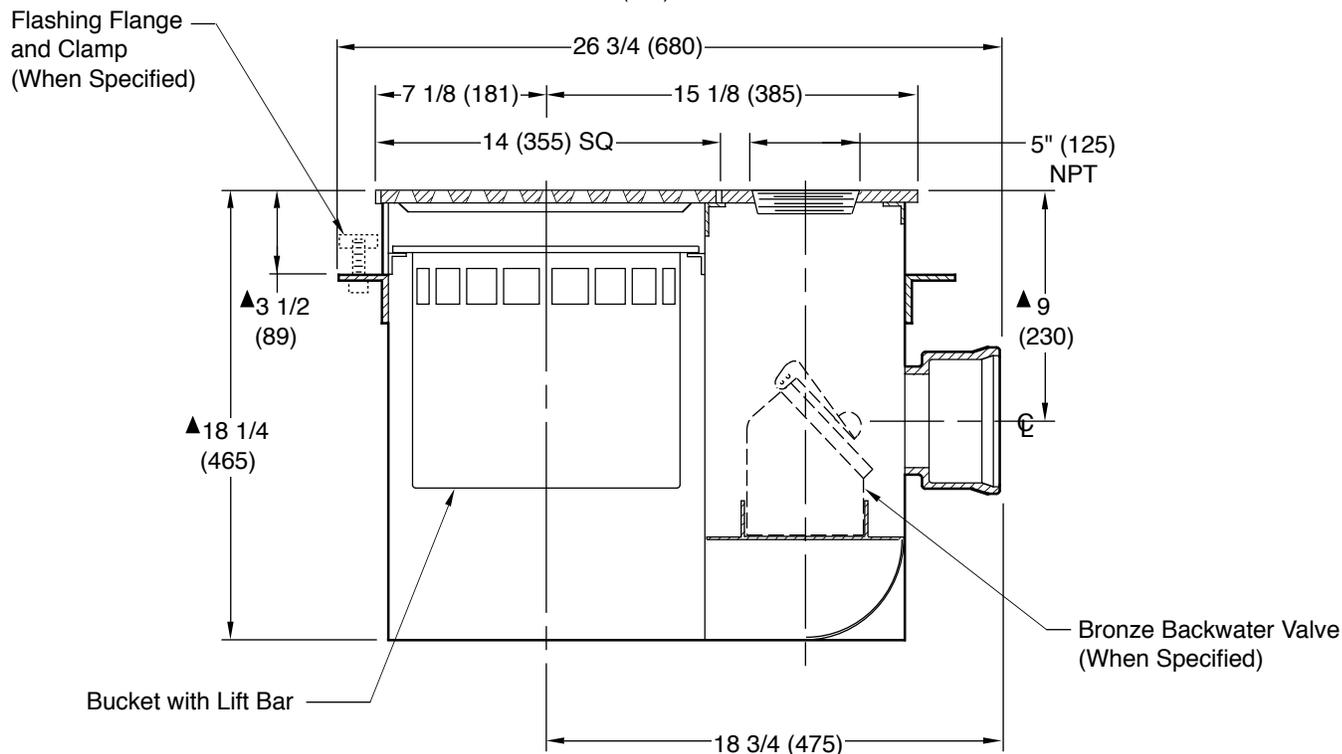

A (Pipe Size) = 03(75) or 04(100)

Fig. 2650C . . . . HUB OUTLET

▲add 3/16"(5) when bronze top is specified.

NOTE: Dimensions shown in parentheses are in millimeters.

**REGULARLY FURNISHED:**

Galvanized Coated Fabricated Steel Body with H.D. Ductile Iron ADA Grate, Suspended Bucket and Bronze Cleanout Plug.

**VARIATIONS:**

- Backwater Valve -V
- Anchor Flange -F
- Flashing Flange and Flashing Clamp -F-C
- Vandal Proof Top -U

**OPTIONAL MATERIALS:**

- Nickel Bronze Top -NB
- Polished Bronze Top -PB

DRAWING NUMBER  
**S2650**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**4-14-70**

APPROVED BY:  
**B.H.**

CHECKED BY:  
**R.K.**

DRAWN BY:  
**R.K.**

**2650**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

FIGURE NUMBER	K J H G	1-23-23 7-24-19 6-19-19 9-10-18	Added ADA Added Load Rating Removed Function Revised Variations	KK MW MW TBW	JT JM JM TWK	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>2650</b>
REV.	DATE	DESCRIPTION		BY	CKD. BY			