


REPLACE-WARE FIXTURES



INSTALLATION INSTRUCTIONS



NOTE: USE MOUNTING HARDWARE FROM ORIGINAL UNIT TO MOUNT THE REPLACEWARE UNIT.

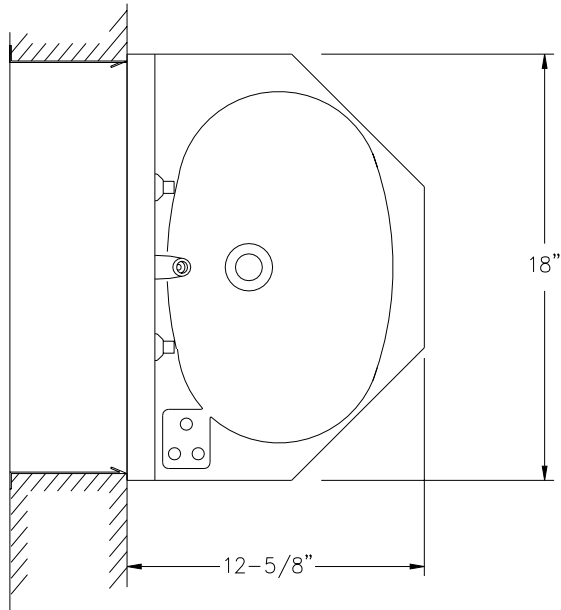

REFERENCE DRAWINGS	
-4 AIR-CONTROL (HOT & COLD)	9905-010-003
-3 AIR-CONTROL (SINGLE TEMP.)	9905-011-003
3395 ANCHORING ASSEMBLY	9925-759-001

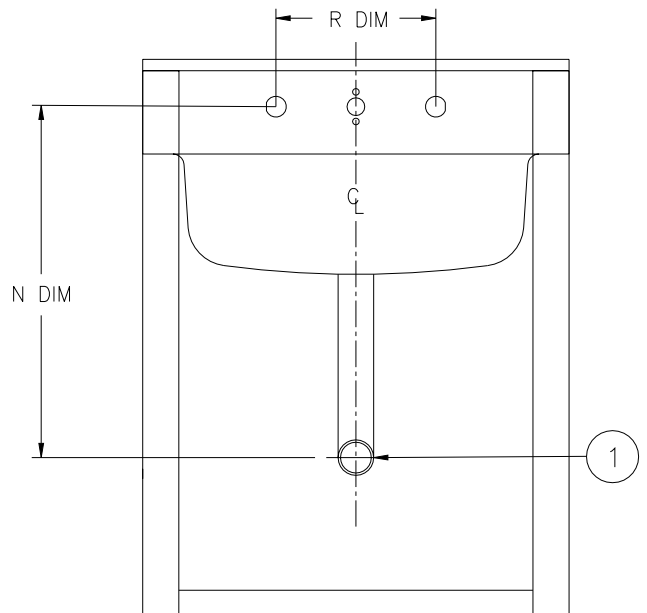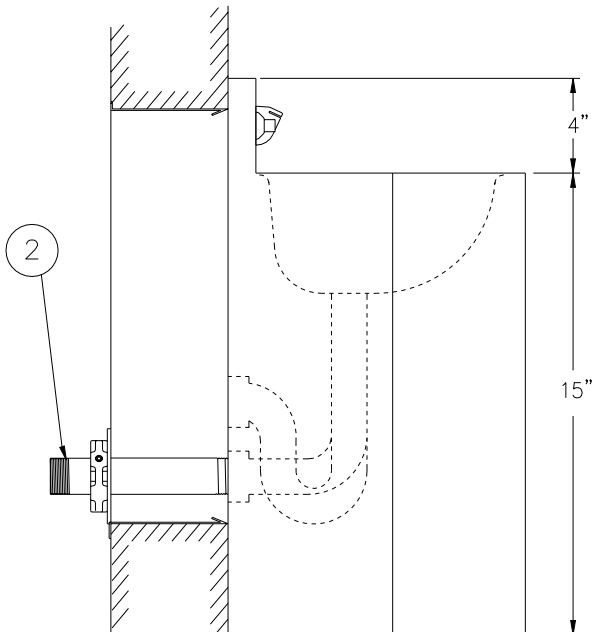

INSTALLATION INSTRUCTIONS:

A-REFER TO VALVE INSTALLATION SHEETS LISTED. INSTALL VALVE TO FIXTURE. VALVE PROVIDES UPPER FIXTURE SUPPORT.


B-MAKE UP FIXTURE WASTE CONNECTION 1-1/4" NPT ① FEMALE. RECOMMENDED ADDITIONAL MOUNTING IS WITH OPTIONAL MODEL #3395 MOUNTING ADAPTER ② .

REAR VIEW




ACORN ENGINEERING COMPANY
P.O. BOX 3527 INDUSTRY, CA. 91744
(626) 336-4561 FAX (626) 961-2200


TITLE 18" MULTI-SIDED LAVY CAT. #3326 SERIES		
MANUFACTURE DATE MARCH 15 1999 TO PRESENT	DATE ISSUED 03-15-99	DRAWING NUMBER 9925-756-001
	DATE REVISED 07-09-99	

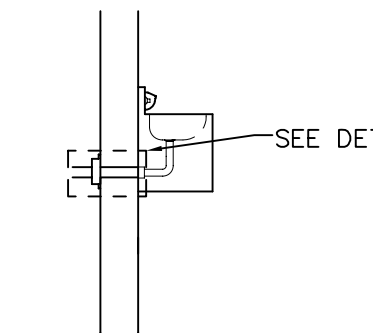


Lavy Waste Connection

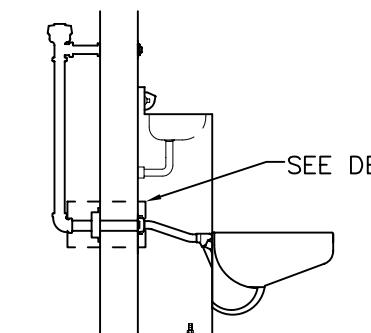

Comby Flushing Inlet Connection

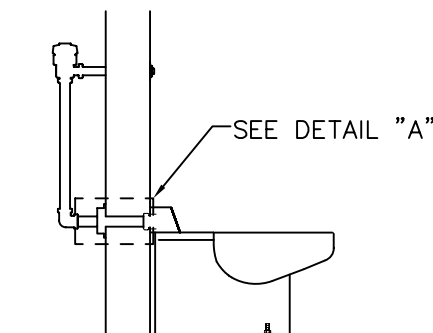

Toilet Flushing Inlet Connection

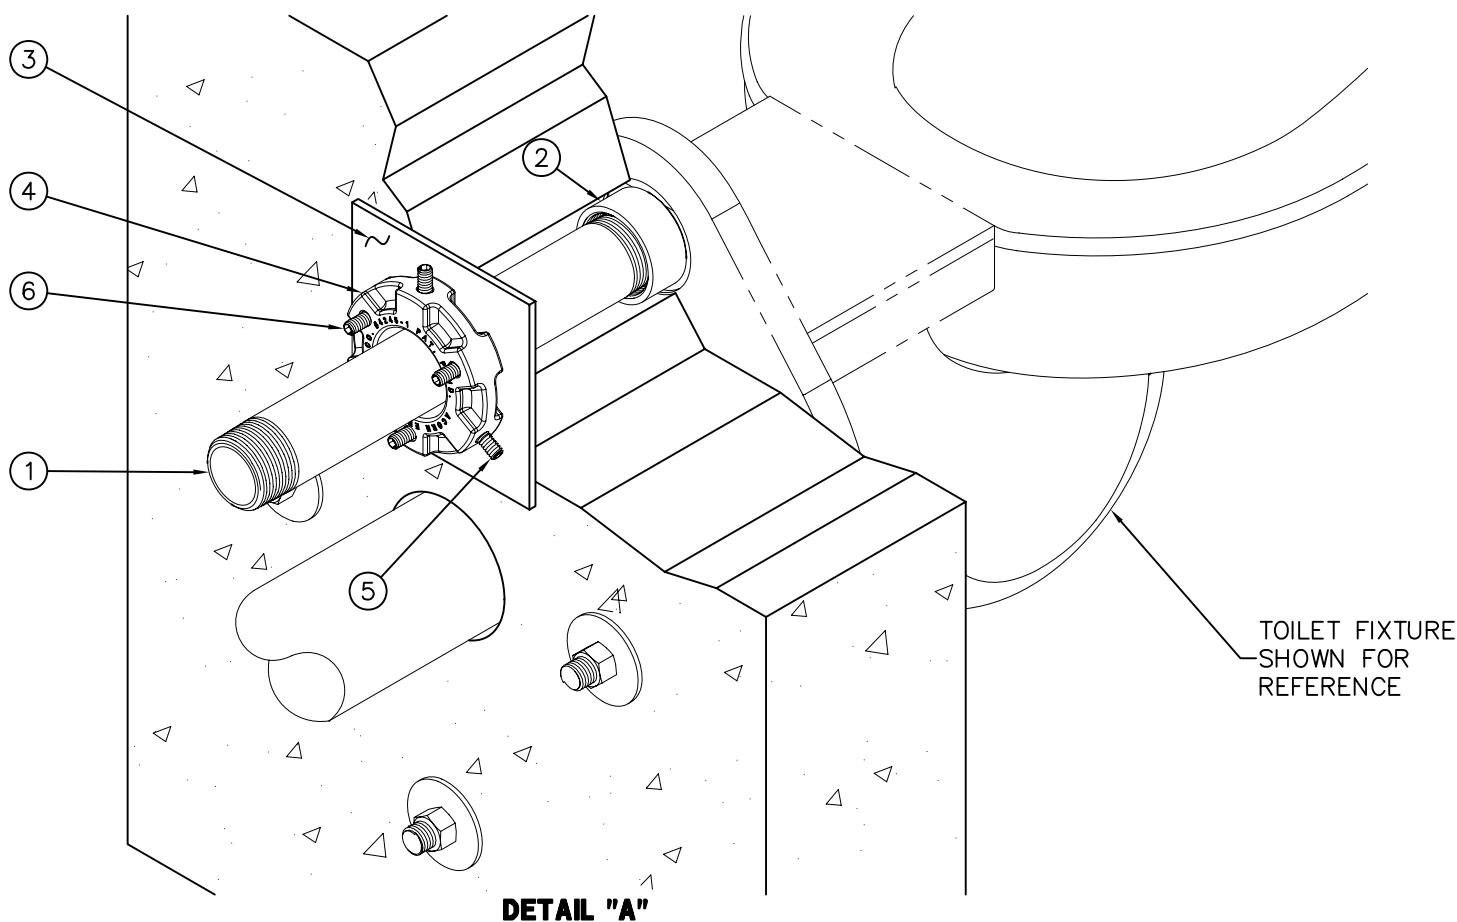

DETAIL "A"

INSTALLATION INSTRUCTIONS:

A- SECURE PIPE (1) TO FIXTURE CONNECTION (2) THROUGH WALL.

B- PLACE THRUST PLATE (3) FLUSH AGAINST WALL.

C- PLACE ANCHORING COLLAR (4) FLUSH AGAINST THRUST PLATE (3).

D- HOLD UNIT AGAINST WALL, PARALLEL TO THE FLOOR.

E- TIGHTEN SCREWS (5) (3 PLACES) TO SECURE ANCHORING COLLAR (4) TO PIPE (1).

F- TIGHTEN SCREWS (6) (3 PLACES) TO PULL PIPE (1) AND PUSH AGAINST THRUST PLATE (3) IN ORDER TO HOLD FIXTURE WITH TENSION AGAINST WALL.



ACORN ENGINEERING COMPANY
P.O. BOX 3527 INDUSTRY, CA. 91744
(626) 336-4561 FAX (626) 961-2200

TITLE

3395 ANCHORING ASSEMBLY

MANUFACTURE DATE

MAY 1998

TO PRESENT

DATE ISSUED

10/06/99

DATE REVISED

04/08/11

DRAWING NUMBER

9925-759-001