


DEEP SUMP ROOF DRAIN WITH DUAL OUTLET

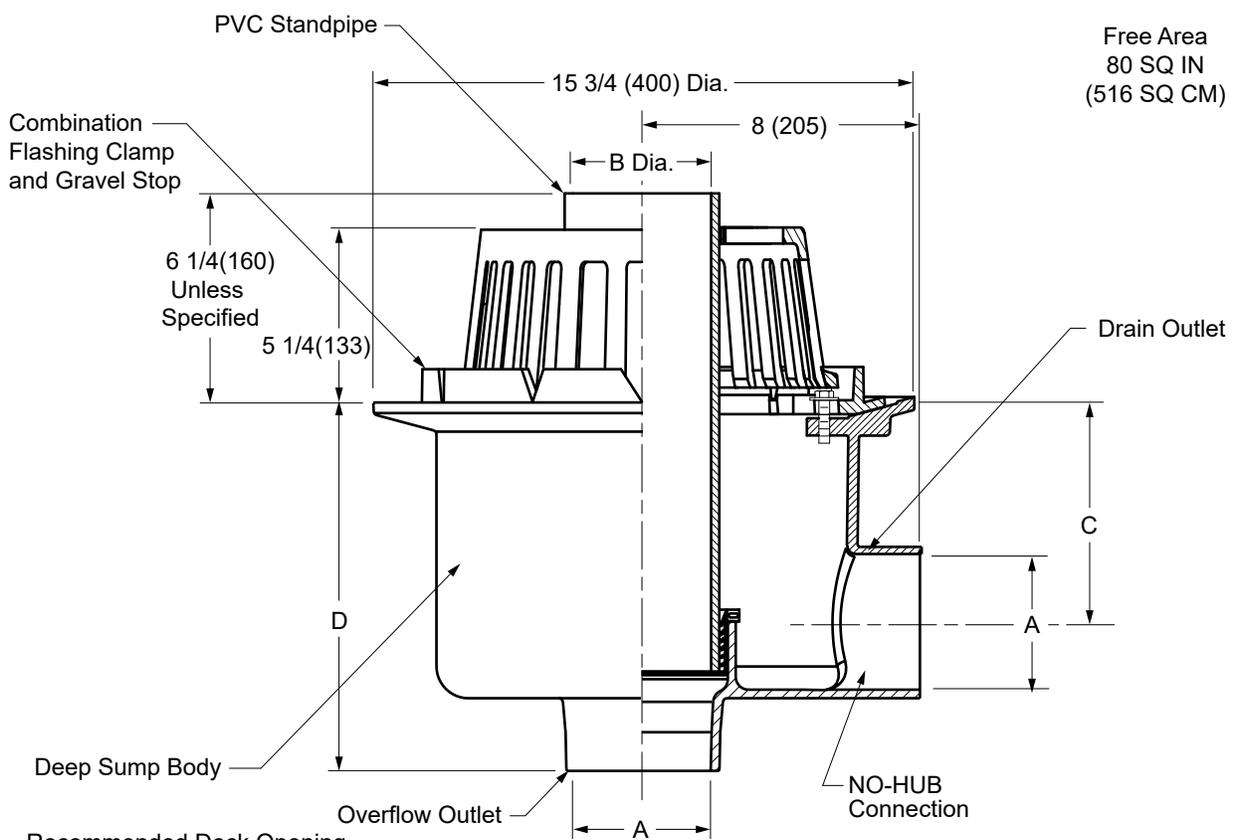

Recommended Deck Opening

with suffix -RDP	17 (430) Dia.
less suffix -RDP	15 (381) Dia.

Fig. 1077Y.....NO-HUB Outlet

Pipe Size	A Dia.	C	D
02(50)	4(100)	7 1/2(191)	10 3/4(273)
03(75)	4(100)	7(178)	10 3/4(273)
04(100)	4(100)	6 1/2(165)	10 3/4(273)
06(150)	6(150)	5 1/2(140)	11 1/8 (282)

REGULARLY FURNISHED:
 Duco Coated Cast Iron Body with Side Outlet Drain Connection and Bottom Outlet Overflow Connection with Standpipe Type Overflow, Combined Flashing Clamp and Gravel Stop and Cast Iron Dome.

- VARIATIONS:**
- Vandal Proof Dome -U
 - Top Mount Deck Plate -RDP
 - Extension -E
 - S.S.Gravel Guard -GG (Specify Height)
 - Cast Iron Standpipe -CIS
 - Overflow Pipe Dome -OFD
 - Sump Receiver -R
 - Under Deck Clamp -C

- OPTIONAL MATERIALS:**
- Polyethylene Dome -PD
 - Rough Bronze Dome -RBD
 - Stainless Steel Mesh
 - Covered Dome -SSM
 - Galvanized Cast Iron -G

NOTE: Dimensions shown in Parentheses are in millimeters.

DRAWING NUMBER: S1077
 SIZE: A
 SCALE: NONE
 DATE: 11/21/08
 APPROVED BY: AM
 CHECKED BY: AM
 DRAWN BY: JJ
 FIGURE NUMBER: 1077

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
Q	3-6-25	Rev. Variations and Optional Mat.	HS	KV			1077
P	6-19-24	Rev. Drawing and Table	HS	KV			
N	2-28-24	Revised Variations, Optional Mat.	HS	CL			
M	7-18-23	Removed Note, Added Free Area	HS	CL			

DRAWING NUMBER
S1077BackSheet

SIZE
A

SCALE:
NONE

DATE:
9-13-16

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
BS

1077 (Back Sheet)

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

DEEP SUMP ROOF DRAIN WITH DUAL OUTLET

Free Area
228 SQ IN
(1471 SQ CM)

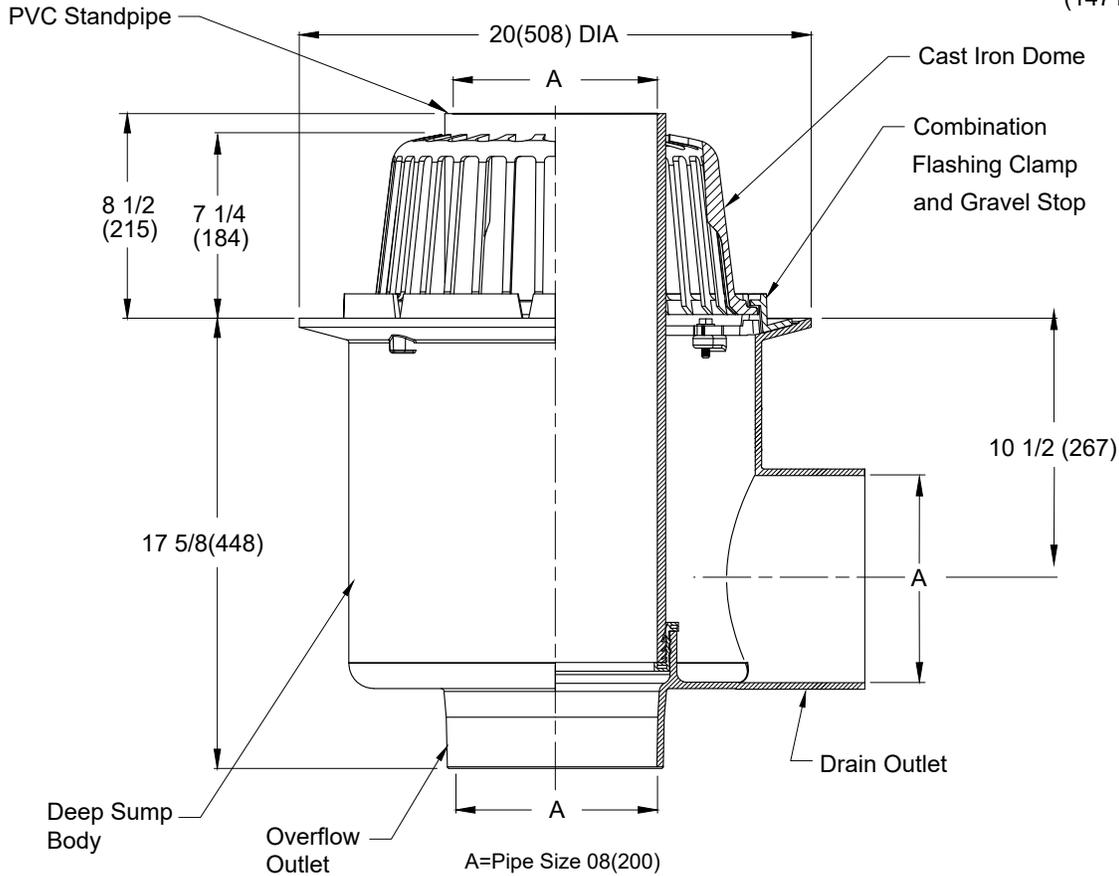


Fig. 1077Y08.....NO-HUB Outlet

Recommended Deck Opening

with suffix -RDP	18 3/4 (475) Dia.
less suffix -RDP	21 (535) Dia.

REGULARLY FURNISHED:

Duco Coated Cast Iron Body with Side Outlet Drain Connection and Bottom Outlet Overflow Connection with Standpipe Type Overflow, Combined Flashing Clamp and Gravel Stop and Cast Iron Dome.

VARIATIONS:

- Vandal Proof Dome -U
- Top Mount Deck Plate -RDP
- Overflow Pipe Dome -OFD
- Extension -E
- Cast Iron Standpipe -CIS
- S.S. Gravel Guard -GG (Specify Height)
- Sump Receiver -R
- Underdeck Clamp -C

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Stainless Steel Mesh Covered Dome -SSM
- Galvanized Cast Iron -G

NOTE: Dimensions shown in Parentheses are in millimeters.

D	3-6-25	Revised Variations	HS	KV	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1077 (Back Sheet)
C	2-28-24	Revised Variations, Optional Mat.	HS	CL			
B	7-18-23	Removed Note, Changed B.S.	HS	CL			
A	10-11-22	Changed 7 1/2 to 8 1/2	KK	CR			
REV.	DATE	DESCRIPTION	BY	CKD. BY			