


# FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

## ROUND CAST IRON TOP - TRACTOR COVER WITH PUSH-ON SPEEDI-SET® OUTLET

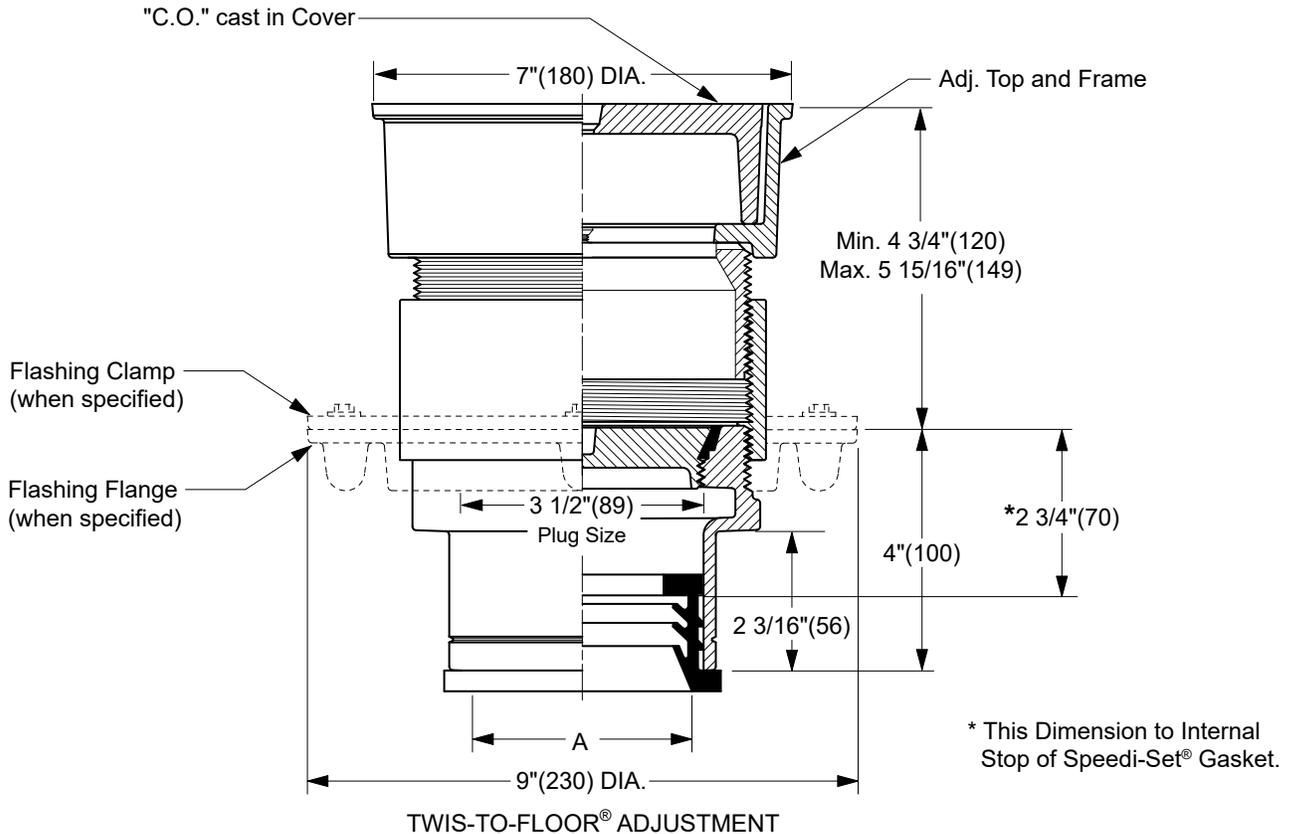

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4237L.....Gasket Seal - ABS Plug
- Fig. 4238L.....Gasket Seal - Bronze Plug
- Fig. 4239L.....Taper Thread - Bronze Plug
- Fig. 4236L.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

**NOTE:** Dimensions shown in parentheses are in millimeters.

▲ Available in Extra Heavy, Service Weight or NO-HUB.

**REGULARLY FURNISHED:**

Duco Cast Iron Cleanout with Round Adjustable Scoriated Cast Iron Top with Non-Tilt Tractor Cover. Closure Plug Type as Indicated by Figure Number Selected.

**VARIATIONS:**

- Center Securing Screw -CSS
- Vandal Proof Center Securing Screw -U
- Flashing Flange -F
- Flange with Flashing Clamp -F-C

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron -G
- Ductile Iron Cover -M
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

DRAWING NUMBER **S4237**

SIZE **A**

SCALE: **NONE**

DATE: **2-16-70**

APPROVED BY: **JM**

CHECKED BY: **BH**

DRAWN BY: **RK**

**4237 SERIES**

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							<b>4237 SERIES</b>


E  
 DRAWING NUMBER S4237BS  
 SIZE A  
 SCALE: NONE  
 DATE: 5-5-06  
 APPROVED BY: CEL  
 CHECKED BY: CL  
 DRAWN BY: RN  
 4239  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

## ROUND CAST IRON TOP - TRACTOR COVER WITH PUSH-ON SPEEDI-SET® OUTLET

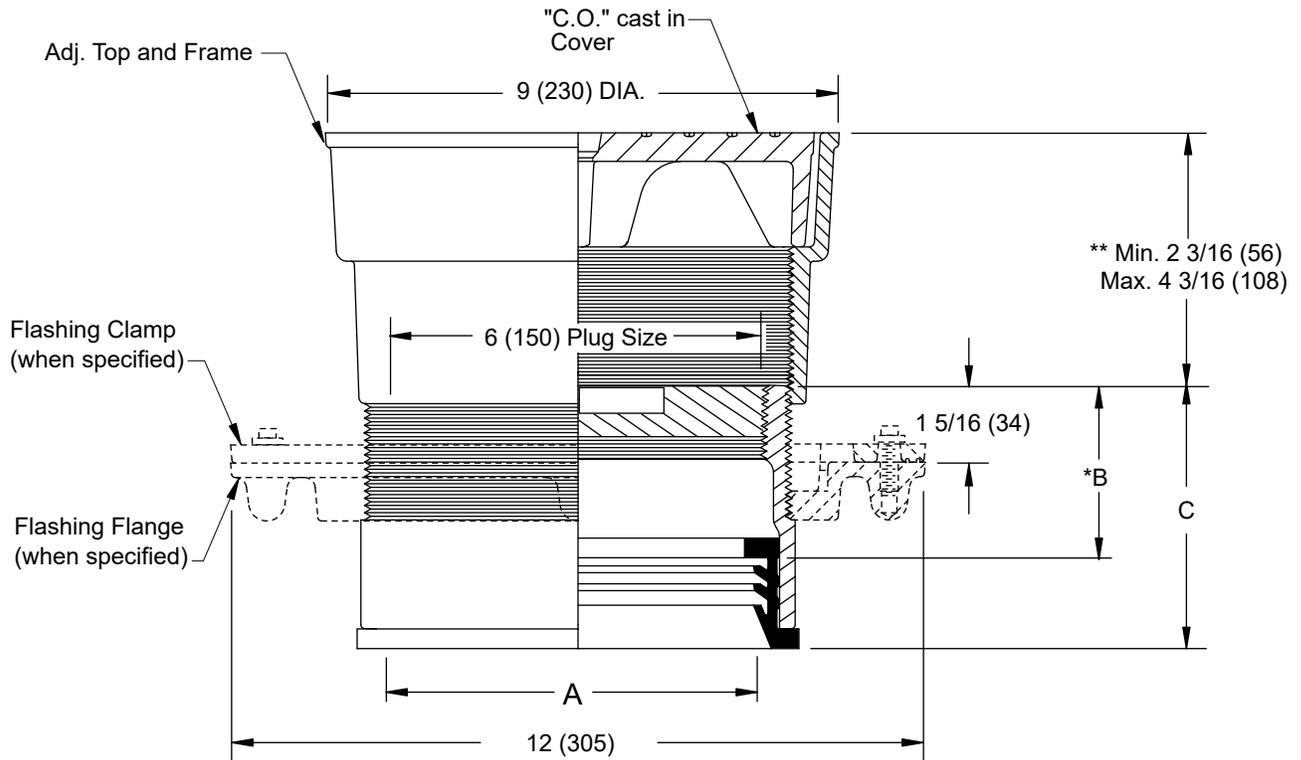

**SPEEDI-SET® OUTLET ▲**

"A" (Pipe Size) = 06(150) & 08(200)

Conforms to ASME A112.36.2/CSA B79.2

A SIZE	B	C
06(150)	*3(76)	4 9/16(117)
08(200)	*3 1/4(83)	4 13/16(121)

**"TWIS-TO-FLOOR®" ADJUSTMENT SPEEDI-SET® OUTLET ▲**

Fig. 4239L.....Taper Thread - Bronze Plug

**REGULARLY FURNISHED:**

Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Scoriated Cast Iron Top with Non-Tilt Tractor Cover.

**VARIATIONS:**

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U
- Center Securing Screw -CSS

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron -G
- Polished Bronze Top -PB
- Nickel Bronze Top -NB
- Ductile Iron Cover -M

**NOTE:** Dimensions shown in parentheses are in millimeters.

**▲ SPEEDI-SET® OUTLET**

- L Service Weight - For Service Weight and No Hub Cast Iron Pipe (Available for all pipe sizes)
- LXH Extra Heavy - For Extra Heavy Cast Iron Pipe (Available for all pipe sizes)
- LXH Extra Heavy - For PVC Pipe (Available for 2", 3", 4", and 8" pipe sizes only)
- LPVC Plastic Pipe - For PVC or ABS pipe (Available for 6" pipe size only)
- \* This Dimension to Internal Stop of Speedi-Set® Gasket.
- \*\* When Flange-F is specified Min. 2 3/16 (56) becomes 2 11/16 (68)

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
E	11-25-24	Revised Description	HS	CL			4239
D	4-11-24	Added ASME Note	HS	CL			
C	8-17-23	Removed Function	HS	CL			
B	3-14-23	Added @ to Speedi-Set	KK	CL			