



Whitehall Manufacturing®
Manufacturer of Healthcare and Rehabilitation Products since 1946

Ligature Resistant Floor Drain




WHFD SERIES SHOWN



WHFDV SERIES SHOWN

MODELS:	WHFD-5RD-2NH-SS
WHFD-5RD-2NH	WHFD-6RD-2NH-SS
WHFD-6RD-2NH	WHFD-5SQ-2NH-SS
WHFD-5SQ-2NH	WHFD-6SQ-2NH-SS
WHFD-6SQ-2NH	WHFD-5RD-2NH-SS-TP
WHFD-5RD-2NH-TP	WHFD-6RD-2NH-SS-TP
WHFD-6RD-2NH-TP	WHFD-5SQ-2NH-SS-TP
WHFD-5SQ-2NH-TP	WHFD-6SQ-2NH-SS-TP
WHFD-6SQ-2NH-TP	WHFDV-6RD-2NH

[Link to Product Submittals](#)

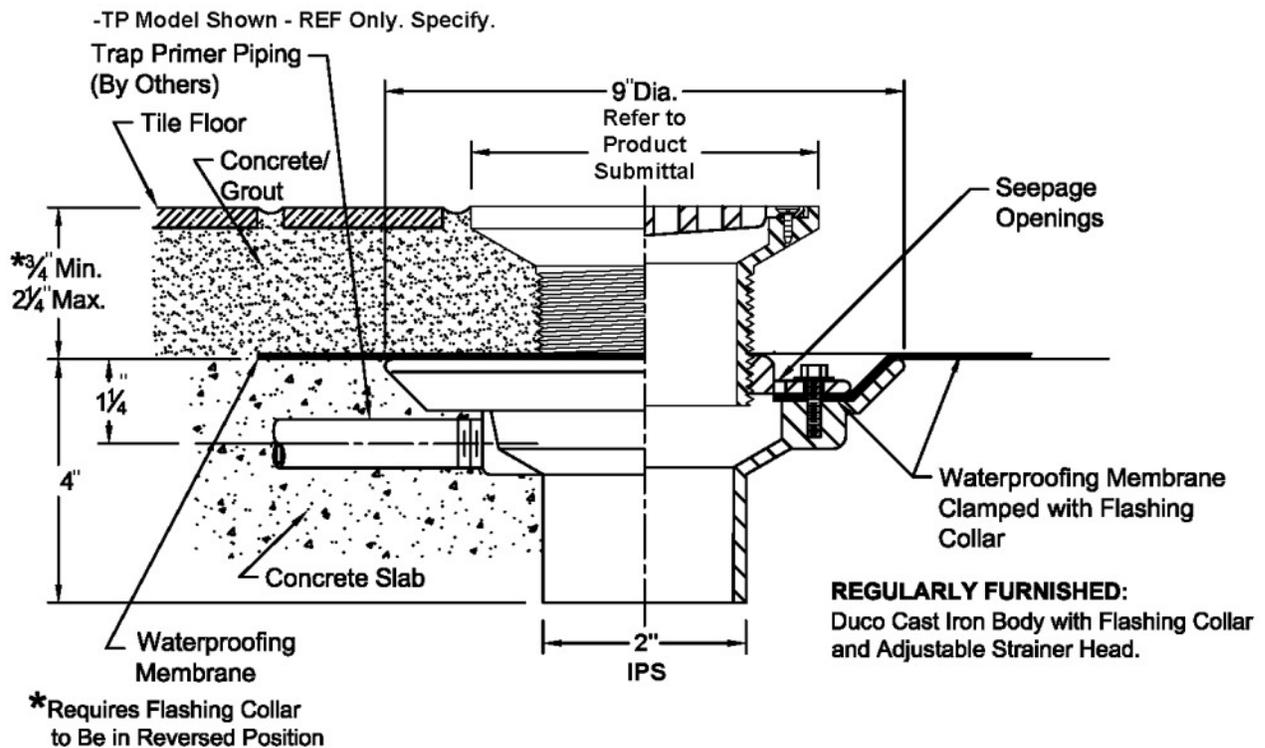

(Refer to Model Specified)
Drain Body poured (in place into Structural Slab) Shown.
— Recommended Installation.

! IMPORTANT


WATERPROOFING MEMBRANE: When installing in an above grade floor, a waterproofing membrane is to be ran up to and over the drain body flange and clamped with flashing collar. Membrane covering the center of drain body is to be trimmed to ensure flow through the drain is not blocked or obstructed. Refer to Installation Instructions for complete details.

Drain Bases are supplied from Jay R. Smith Mfg. Co.® for use with Whitehall Manufacturing® BestCare® Ligature Resistant Drain Grate. Drain Installation detail provided may differ based upon project specific flooring design and materials. Reference Jay R. Smith Mfg. Co.® Drain Model 2005/2010 Series.


Installer is to refer to local code requirements for related installation details and shall use Industry standards of best and most common practice to suit fixture type and site conditions.



Ligature Resistant Floor Drain

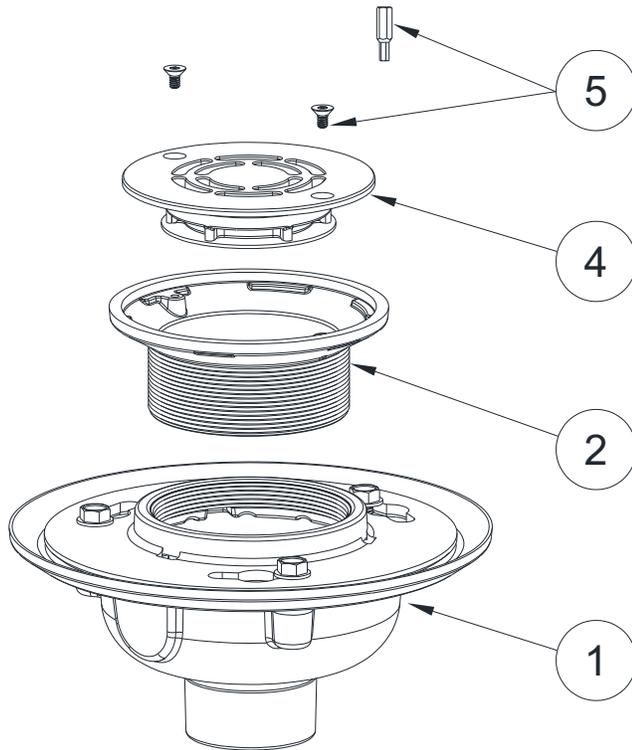

WHFD SERIES SHOWN

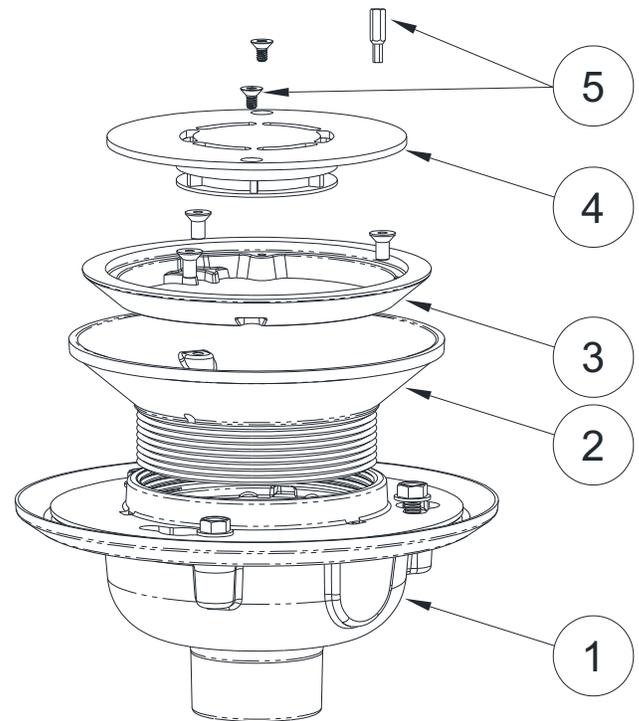

WHFDV SERIES SHOWN

NOTES:

1. Cast Iron Drain Body (2" IPS is standard)
2. Adjustable Strainer Head
3. Vinyl Floor Flashing
4. Ligature Resistant Drain Grate
5. Vandal Resistant Screws and 5/32" Hex Bit for Center Reject Pin (*Hex Bit PN 0296-026-000*)

GENERAL:

1. Refer to illustration and statements on page 1 for installation details of Cast Iron Drain Body [1] and Waterproof Membrane (not shown).
2. Rotate and position Adjustable Strainer Head [2] to suit height of Finished Floor.
3. **WHFDV Series:** Using screws provided, integrate Vinyl Floor Flashing [3] with flooring material as required.
4. Using 5/32" Hex Bit for Center Reject Pin and Vandal Resistant Screws [5], assemble Ligature Resistant Grate [4] to Strainer Head [2].

! IMPORTANT

Drain Installation detail provided may differ based upon project specific flooring design and materials used. To complete installation, Installer is to use Industry Standards of Best and most Common Practice to suit drain type, flooring construction, and flooring finish materials to ensure requirements for drainage and water resistance are met.