

BF11 Bottle Filler Series

H₂O TO GO![®] PUSHBUTTON OPERATED
BOTTLE FILLER

STANDARD FEATURES

- ADA Compliant
- 100-Mesh Inlet Strainer
- Pushbutton Operation
- 1 GPM Laminar Flow Nozzle
- Fits A171-UG, A172-UG Series Fountains and Coolers
- May be used with certain competitor models
(Contact Factory for more information)

SUGGESTED SPECIFICATIONS

Bottle Filling unit shall include Pushbutton operated activation. Existing Drinking Fountain may require alteration for connection to Bottle Filler. Housing construction will be 20 gage Stainless Steel with a satin finish and will also include components manufactured from Antimicrobial, impact resistant ABS. Bottle Filler shall provide approximately 1.0 GPM flow rate with a Laminar Flow Spout to minimize splashing. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI 53 for Cyst and total PFAS reduction.



"INDOOR USE ONLY"

MODEL:

(Must Specify)

- BF11 Pushbutton Operated Bottle Filler

ACCESSORIES:

(Additional costs may apply. Accessory items are packaged separately.)

- WF3000 3000-Gallon PFAS Water Filter¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTES:

1- Refer to Supplemental Submittal Sheet for details.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



NSF/ANSI/CAN 61

NSF/ANSI/CAN 61: Q ≤ 1

NSF/ANSI/CAN 61 Compliant including lower lead leaching criteria.



[3000 Gallon PFAS Filter Certifications](#)

[Product Warranty](#)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

BF11 Bottle Filler Series

H₂O TO GO![®] PUSHBUTTON
OPERATED BOTTLE FILLER

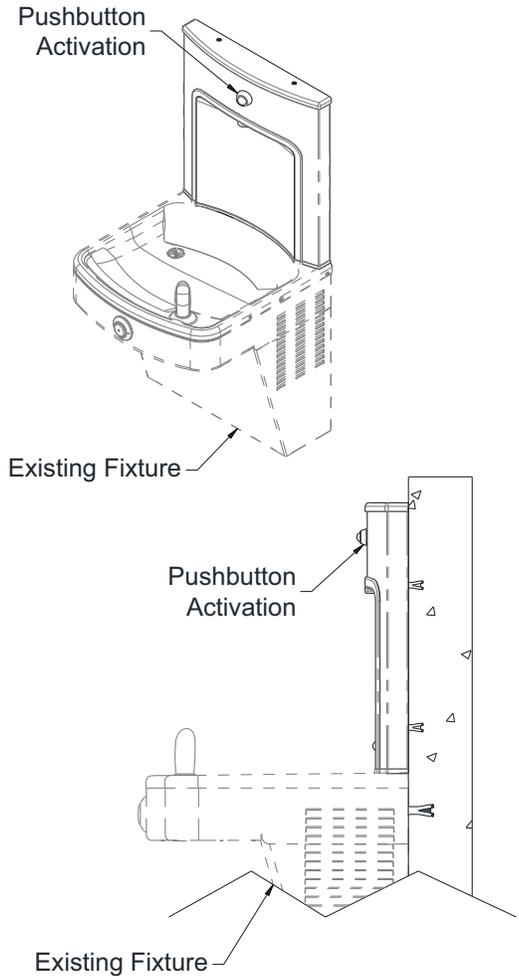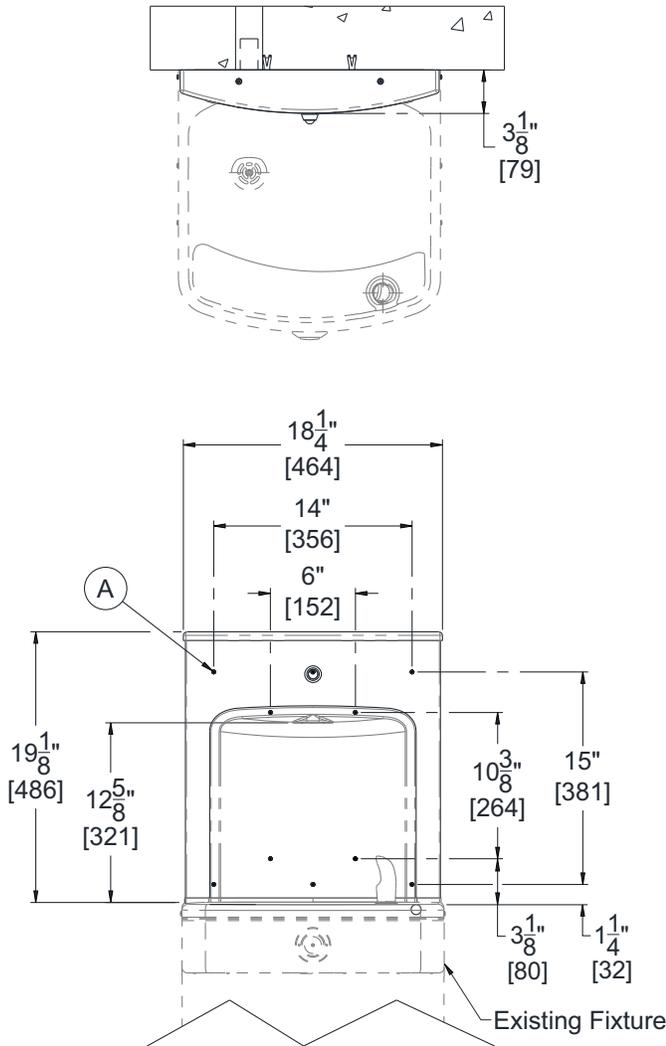

General Note:

1. All dimensions are in inches [MM]

- A. Ø1/4" Holes, 10 Places for Anchoring Hardware, provided by others

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	<p><i>All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.</i></p>
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	