



Meridian® 2140 Series Blowout Jet Toilet - Wall Outlet



2140-W-2-RM

Fixture May Show Some Available Options



Please visit www.acorneng.com for most current specifications.

Blowout Jet Toilet

Meridian® Toilet contoured Housing features an attractive, satin finish and optionally available with a High Polish Finish (-HP) for an exceptional, elegant appearance. The standard Toilet Bowl has a matte finish on the inside. Mounting is available for front or rear installations. Unit includes punching for an elongated Hinged Seat. (-HS Hinged Seat is optionally available.) Housing includes Access Panel on each side for installation of fixture and Hinged Seat.

Toilet is a Blowout Jet type with an elongated Bowl manufactured to ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.28 GPF. P-Trap has a minimum 3-1/2" Seal and will pass a 2-1/8" Ball and is fully enclosed.

Flush Valve supply is available for exposed or concealed Flush Valve styles with 1-1/2" NPT connection.

Front Mount (-FM) unit includes a fixture-to-wall Mounting Plate with exposed vandal-resistant fasteners. Mounting Plate is mounted directly to a reinforced wall or to an optional -MC Mounting Carrier (6" bolt centers) for off-floor, Front Mount models. Waste Outlet connection for Front Mount (-FM) unit is 5-1/2" diameter recessed Gasket Flange.

Rear Mount (-RM) unit includes integral 1/2" UNC Anchor Tapping and mounting hardware. Unit requires an accessible pipe chase for installation. Waste Outlet connection for Rear Mount (-RM) unit is a 2-3/8" OD stainless steel plain end.

GUIDE SPECIFICATION

Acorn Meridian® Blowout Jet Toilet (specify model number and options). Fixture to be heavy gage type 304 stainless steel. Exposed surfaces shall be polished to a satin finish. Housing to include side Access Panels and punching for Hinged Seat. Toilet shall meet ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.28 GPF. Toilet P-Trap shall have a minimum 3-1/2" Seal that shall pass a 2-1/8" diameter Ball and be fully enclosed.



Meridian®: 2140 Blowout Jet Toilet - Wall Outlet

WALL THICKNESS AND TYPE (Must Specify)

Thickness: _____ Type: Concrete Block Steel

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

2140 Blowout Jet Toilet

SUPPLY SELECTION (Must Specify)

-T Top (Exposed)
 -W Wall (Concealed)

FIXTURE MOUNTING & WASTE (Must Specify)

-1 Off-Floor, Wall Outlet
 -2 On-Floor, Wall Outlet

INSTALLATION (Must Specify)

-FM Front Mount
 -RM Rear Mount

TOILET SEAT HEIGHT (15" STANDARD)

-ADA 18" Integral Seat Height

FLUSH VALVE GPFs (Must Specify)

-1.28 GPF
 -1.6 GPF (Not Available in California)
 -3.5 GPF (Not Available in California)

FLUSH VALVE OPTIONS (Must Specify)

***NOTE: FOR FLUSH VALVE ACCESS PANEL OR COVER REFER TO ACORN OPTIONS MODEL #2898 (-W SUPPLY) OR # 2802 (-T SUPPLY).**

- FV Flush Valve, Mechanical (-W, -T, -T-ADA, N/A for -W-ADA)
- FVBO Flush Valve by Others (Select with 2898 & 2802 Covers)
- FVH Flush Valve, ADA Hydraulic (iW and -W-ADA Only)
- FVL Flush Valve, ADA Lever Handle (-W and -W-ADA Only)
- MVCFV Time-Trol Flush Valve (-W and -W-ADA Only)

TOILET SEAT OPTIONS

- HS-OFLC Hinged Seat, Open Front Less Cover
- HS-OFWC Hinged Seat With Cover
- LPFS Less Punch for Hinged Seat


TOILET OPTIONS

- CO1 Cleanout with O-Ring to No-Hub 2-3/8" x 4" (-RM Models Only)
- CO1_3 Cleanout with O-Ring to No-Hub 2-3/8" x 3" (-RM Models Only)
- FVT Flush Thru Wall Connector
- GW Gasket Waste (Standard on-FM but Optional on -RM)

PRODUCT OPTIONS


- BL Bedpan Lugs
- EGE Enviro-Glaze Color Specify: _____ Toilet Exterior Only
- FG 14 Gage Housing
- HP High Polish Finish (Exterior Only)
- MC Mounting Carrier (6" Bolt Centers) (-1-FM Models Only N/A with -ADA option)
- MT Metal Template
- SW Wall Sleeve (-RM Models Only)
- TF Transformer, 120VAC to 24VAC (-MVCFV option)

Please visit www.acorneng.com for most current specifications.

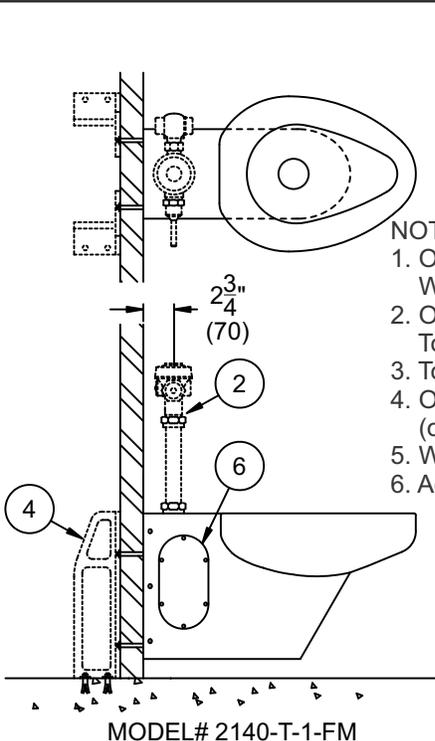

NOTES:

1. Optional -FV Flush Valve - Wall Supply
2. Optional -FV Flush Valve - Top Supply
3. Toilet Waste Outlet
4. Optional -MC Mounting Carrier (off-floor, Front Mount)
5. Wall Mounting Hardware
6. Access Panel (Both Sides)

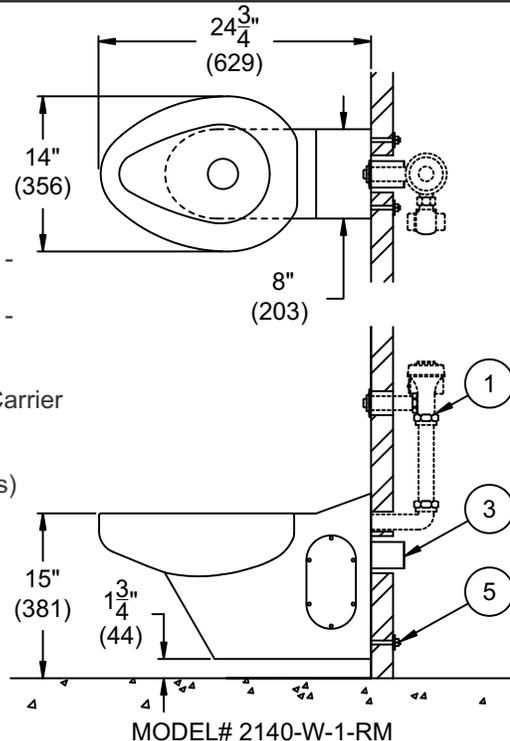

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>