


LARGE SPECIAL PURPOSE ROOF DRAINS

RAINTROL® ROOF DRAIN FLAT OR SLOPED ROOF DESIGN

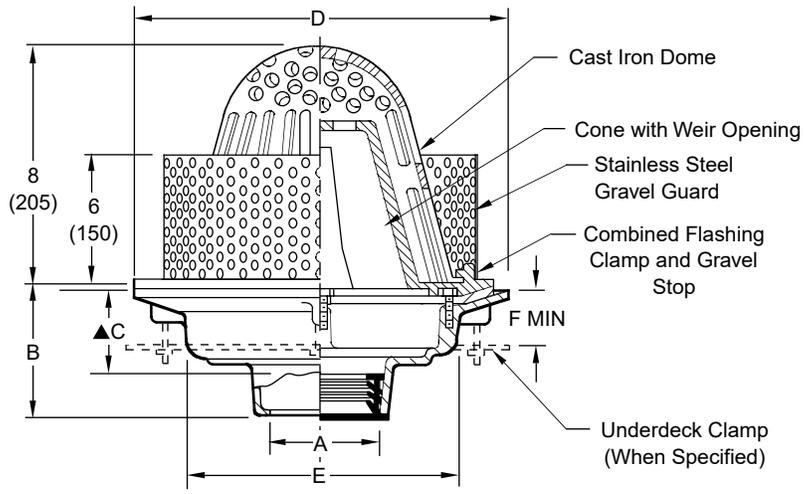

- Fig. 1011-83C-CAN... CAULK OUTLET
- Fig. 1011-83Y-CAN... NO-HUB OUTLET
- Fig. 1011-83T-CAN... THREADED OUTLET

▲ This dimension to internal stop of Speedi-Set gasket

Recommended Deck Opening		
outlet size	with suffix-R	less suffix-R
02,03,04 (50, 75, 100)	17 DIA (430)	14 DIA (355)

A SIZE	B (BOTTOM OUTLET)		C	D DIA	E DIA	F MIN	FREE AREA SQ IN
	CAULK, NO-HUB, & SPEEDI-SET▲	THREADED					
02,03,04 (50, 75, 100)	5 (125)	3 3/4 (95)	3 3/4 (95)	15 1/4 (390)	11 (280)	1 1/8 (29)	122 (788 cm ²)

REGULARLY FURNISHED:
 Duco Cast Iron Body with Large Sump, Non-Puncturing Flashing Collar, Gravel Stop, Integral Cone with Weir Opening and Large Cast Iron Dome.

- VARIATIONS:**
- Expansion Joint (See Fig. 1710)
 - Extension (Specify Height) -E
 - "L" Shaped Underdeck Clamp -CL
 - Secondary Flashing Clamp -C2 (Used with Extension Only)
 - Galvanized Sump Receiver -R
 - Underdeck Clamp -C
 - Vandal Proof Dome -U
 - T Threaded Outlet

OPTIONAL MATERIALS:
 Galvanized Cast Iron -G

Dimensions shown in parenthesis are in millimeters

A
 DRAWING NUMBER S1011-83-CAN
 SIZE A
 SCALE: NONE
 DATE: 01/07/00
 APPROVED BY:
 CHECKED BY:
 DRAWN BY: JJ
 1011-83-CAN
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
A	10-12-23	Removed Function	HS	CL			1011-83-CAN