



JAY R. SMITH MFG. CO.
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com




MEMBER OF:

LOCATION

OVERFLOW ROOF DRAINS

8 1/2" (215) DIAMETER - LOW PROFILE DOME

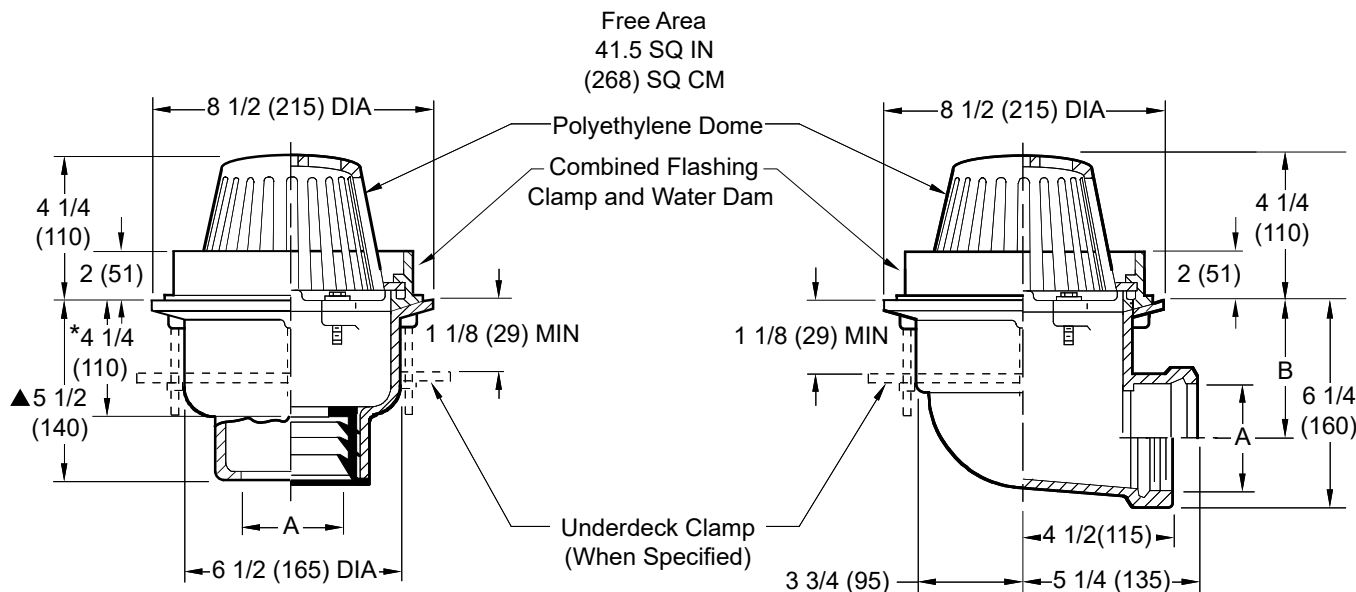

- ☐ Fig. 1330C -WD02 CAULK OUTLET
☐ Fig. 1330Y -WD02 NO-HUB OUTLET
☐ Fig. 1330T -WD02 THREADED OUTLET

- ☐ Fig. 1340C -WD02 CAULK OUTLET
☐ Fig. 1340T -WD02 THREADED OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

recommended deck opening

with suffix -R	9(230) DIA
less suffix -R	7 3/4(195) DIA

*This Dimension to Internal

Stop of Speedi-Set® Gasket.

▲ Same for Caulk, NO-HUB and Speedi-Set®, 4 1/4(110) for Threaded.

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)

REGULARLY FURNISHED:

Duco Cast Iron Body with
Combined Flashing Clamp and
Water Dam with Polyethylene
Dome.

VARIATIONS:

- ☐ Expansion Joint (Specify Fig. 1710)
(Fig. 1330 only)
☐ Extension -E (Specify Height)
☐ "L" Shaped Underdeck Clamp -CL
☐ L Speedi-Set® Service Weight (Fig. 1330 only)
☐ LXH Speedi-Set® Extra Heavy (Fig. 1330 only)
☐ NO-HUB Adaptor (Specify
Fig. 2646Y) (Fig. 1340 only)
☐ Secondary Flashing Clamp -C2
☐ Sump Receiver -R
☐ Underdeck Clamp -C
☐ Vandal Proof Dome -U
☐ Stainless Steel Mesh Over Dome -SSM
☐ Roof Deck Plate -RDP
☐ 02 1/2(64) Water Dams -WD025

OPTIONAL MATERIALS:

- ☐ Aluminum Dome -AD
☐ Cast Iron Dome -CID
☐ Galvanized Cast Iron Body & Collar -G
☐ Galvanized Cast Iron Dome -CIDG
☐ Rough Bronze Dome -RBD

NOTE: Dimensions shown in
parentheses are in millimeters.

DRAWING NUMBER
s1330-WD02, 1340-WD02

SIZE
A

SCALE:
NONE

DATE:
5-24-85

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
TB

1330-WD02, 1340-WD02

FIGURE
NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1330-WD02 1340-WD02



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov