


Snap-N-Go!® FINISHED FLOOR CLEANOUTS WITH TWIS-TO-FLOOR® ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH ROUGH ADJUSTMENT SLEEVE

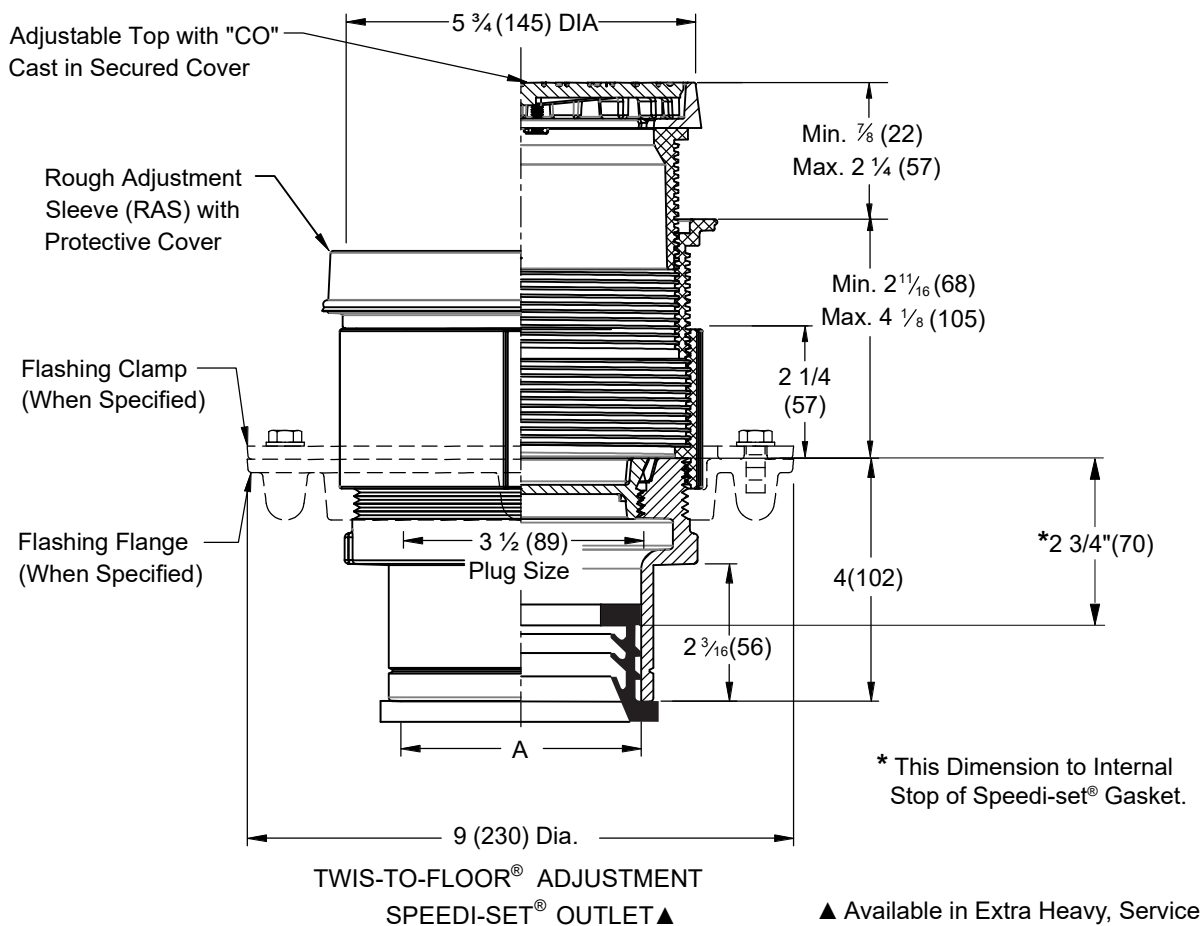

A (Pipe Size) = 02(50), 03(75), or 04(100)

- | | | | |
|--|-----------|-----------------|----------------------------|
| | Fig. 4031 | RAS-L | Gasket Seal - ABS Plug |
| | Fig. 4032 | RAS-L | Gasket Seal - Bronze Plug |
| | Fig. 4033 | RAS-L | Taper Thread - Bronze Plug |
| | Fig. 4034 | RAS-L | Taper Thread - ABS Plug |

REGULARLY FURNISHED:

Cast Iron Cleanout Ferrule with Round Adjustable Scoriated Secured Nickel Bronze Top with Rough Adjustment Sleeve. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- | | |
|---|---------------------------------|
|  | Flashing Flange -F |
|  | Flange with Flashing Clamp -F-C |

OPTIONAL MATERIALS:

- ☐ Polished Bronze Top -PB

U.S. PATENT
10,683,654

CANADIAN
PATENT
3,021,711

C B A	3-11-25 9-9-24 6-5-24	Revised DWG Removed Note, Added New Note Added "Snap-N-Go!"®	HS HS HS	CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4031-RAS SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov