



Division of Acorn
 Engineering Company



A MEMBER OF



MORRIS GROUP
 INTERNATIONAL

WHCSH-WSB LIGATURE RESISTANT CONICAL SHOWER HEAD


Bestcare® Conical Showerhead for Watersense® provides ligature-resistance with fixed, multi-stream spray pattern. Showerhead is offered in both 1.5 GPM (5.68 L) flow rate and includes Chrome Plated Brass Body, Type 304 Stainless Steel Escutcheon with White Powder Coated Finish, O-ring Adapter, Mounting Plate and Stainless Steel Mounting Fasteners. (Wall Anchors and Mounting Hardware is Installer provided as needed to suit site conditions). Complies to requirements listed Under ASME A112.18.1/CSA 125.1 (Certifications on file).



WHCSH

MODEL NUMBER AND OPTIONS SELECTION: BASE MODEL NUMBER (Must Specify)

WHCSH-WSB Ligature Resistant Showerhead - WaterSense® 1.5
 GPM

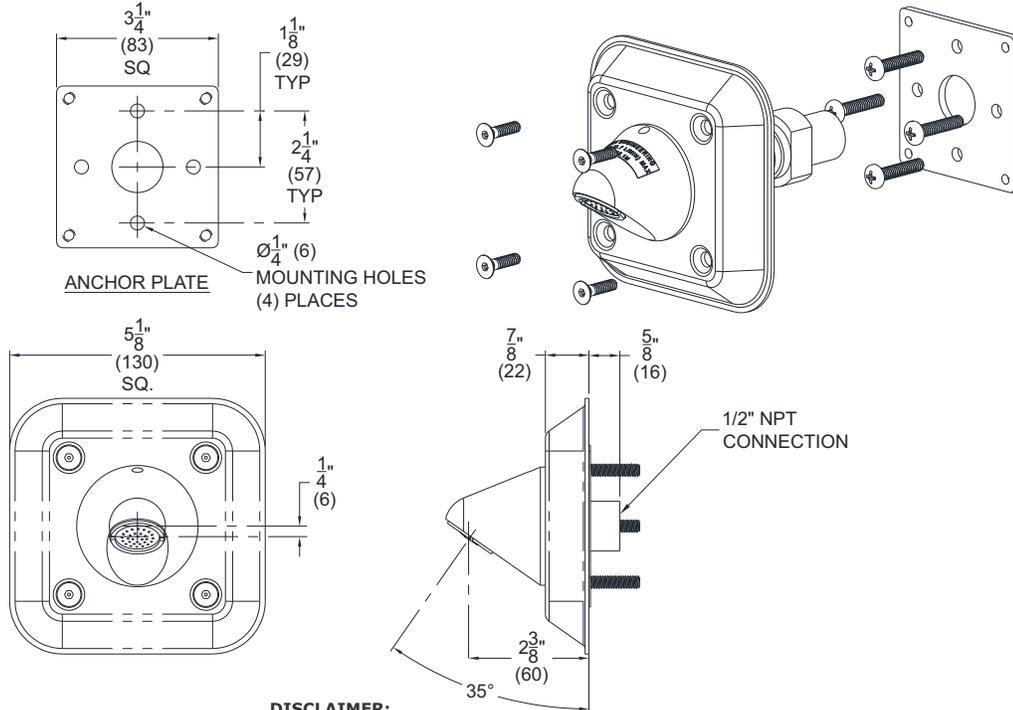

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____



All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.