


FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

ROUND CAST IRON TOP - TRACTOR COVER

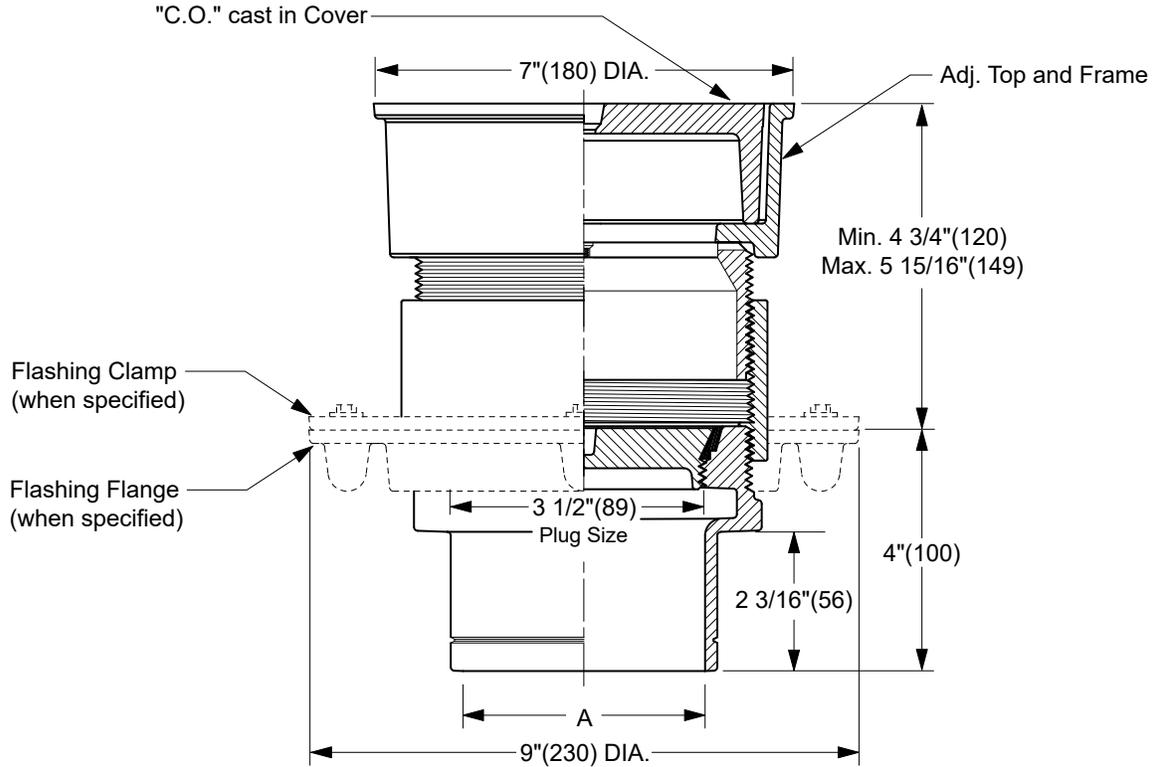

TWIS-TO-FLOOR® ADJUSTMENT

NO-HUB OUTLET

"A" (Pipe Size) = 02(50), 03(75), 04(100) or 05(125)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4240S.....Gasket Seal - ABS Plug
- Fig. 4241S.....Gasket Seal - Bronze Plug
- Fig. 4243S.....Taper Thread - Bronze Plug
- Fig. 4244S.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Scoriated Cast Iron Top with Non-Tilt Tractor Cover. Closure Plug Type as Indicated by Figure Number Selected.

VARIATIONS:

- Center Securing Screw -CSS
- Vandal Proof Center Securing Screw -U
- Flashing Flange -F
- Flange with Flashing Clamp -F-C

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Ductile Iron Cover -M
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

DRAWING NUMBER **S4240**
 SIZE **A**
 SCALE: **NONE**
 DATE: **2-16-70**
 APPROVED BY: **JM**
 CHECKED BY: **BH**
 DRAWN BY: **RK**
4240 SERIES
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

Q P N M	4-11-24 08-17-23 07/29/02 05/07/01	Added ASME Note Removed Function Corrected Clamp & Flange view Edited Outlet Text	HS HS JJ JJ	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4240 SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY			

B
 DRAWING NUMBER S4240BS
 SIZE A
 SCALE: NONE
 DATE: 5-5-06
 APPROVED BY: CEL
 CHECKED BY: CL
 DRAWN BY: RN
 4243
 FIGURE NUMBER

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com






CUSTOMER DRIVEN SINCE 1926
 MEMBER OF:

LOCATION

FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

ROUND CAST IRON TOP - TRACTOR COVER

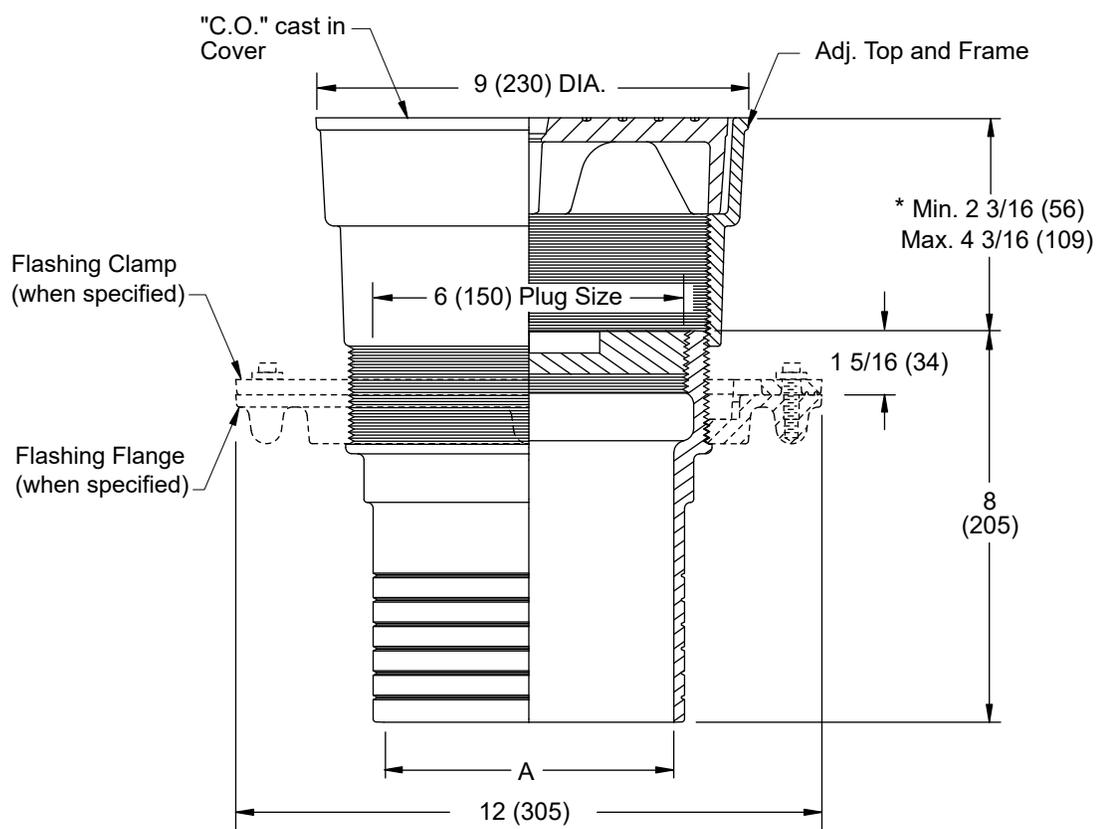

SPIGOT OUTLET ▲
 "A" (Pipe Size) = 06(150) & 08(200)
 Conforms to ASME A112.36.2/CSA B79.2

▲ Sized for Service Weight and/or NO-HUB.
 * When Flange-F is specified Min. 2 3/16 (56) becomes 2 11/16 (68)

"TWIS-TO-FLOOR®" ADJUSTMENT
SPIGOT OUTLET ▲
 Fig. 4243S.....Taper Thread - Bronze Plug

REGULARLY FURNISHED:
 Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Scoriated Cast Iron Top with Non-Tilt Tractor Cover.

- VARIATIONS:**
- Flashing Flange -F
 - Flange with Flashing Clamp -F-C
 - Vandal Proof Top -U
 - Center Securing Screw -CSS

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Polished Bronze Top -PB
 - Nickel Bronze Top -NB
 - Ductile Iron Cover -M

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B	4-11-24	Added ASME Note	HS	CL			4243
A	8-17-23	Removed Function	HS	CL			