

F



JAY R. SMITH MFG. CO.
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:

LOCATION

DRAWING NUMBER
s2260

SCALE:
NONE

DATE:
4-10-70

APPROVED BY:
SJM

CHECKED BY:
BH

DRAWN BY:
JLS

FIGURE NUMBER
2260

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

LARGE CAPACITY FLOOR DRAINS

EXTRA HEAVY DUTY DRAIN WITH SEDIMENT BUCKET

Load Rating: Extra Heavy Duty having a Safe Live (Static) Load between 7,500 lbs. (3,375 kg) and 10,000 lbs. (4,500 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
91 SQ IN
(587) SQ CM

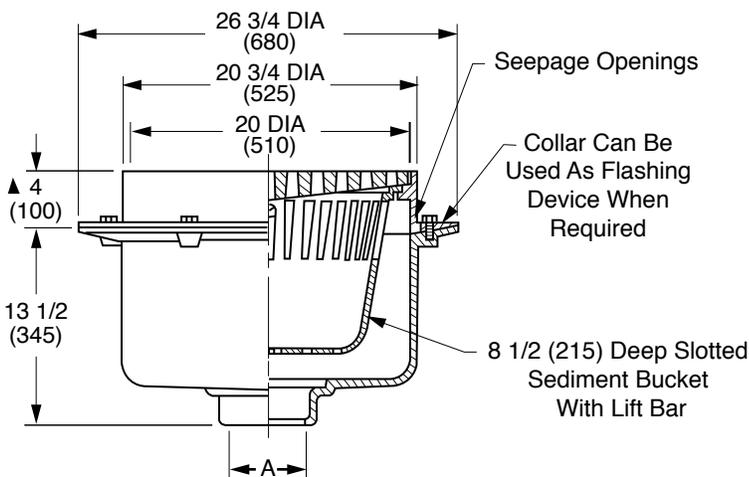

A (Pipe Size) = 03 (75), 04 (100), 05 (125), 06 (150), 08 (200) or 10 (255)

2260C.....CAULK BOTTOM OUTLET

▲ Add 1/4 (6) when Bronze Top is Specified

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Cast Iron Grate and Slotted Sediment Bucket.

VARIATIONS:

- Vandal Proof Grate - U
- Quad Close Trap Seal (Specify Fig. 2692)

OPTIONAL MATERIALS:

- Galvanized Cast Iron - G
- Polished Bronze Top - PB
- Nickel Bronze Top - NB
- Ductile Iron Top -M

NOTE: Dimensions shown in parentheses are in Millimeters.

F	7-22-19	Added Load Rating	MW	JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
D	6-18-19	Removed Function	MW	JM			
C	6-17-15	Revised Variations	TBW	CL	2260		
	1-20-15	Removed Fig. 2265	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			