


ROOFTOP PLANTING AREA DRAIN

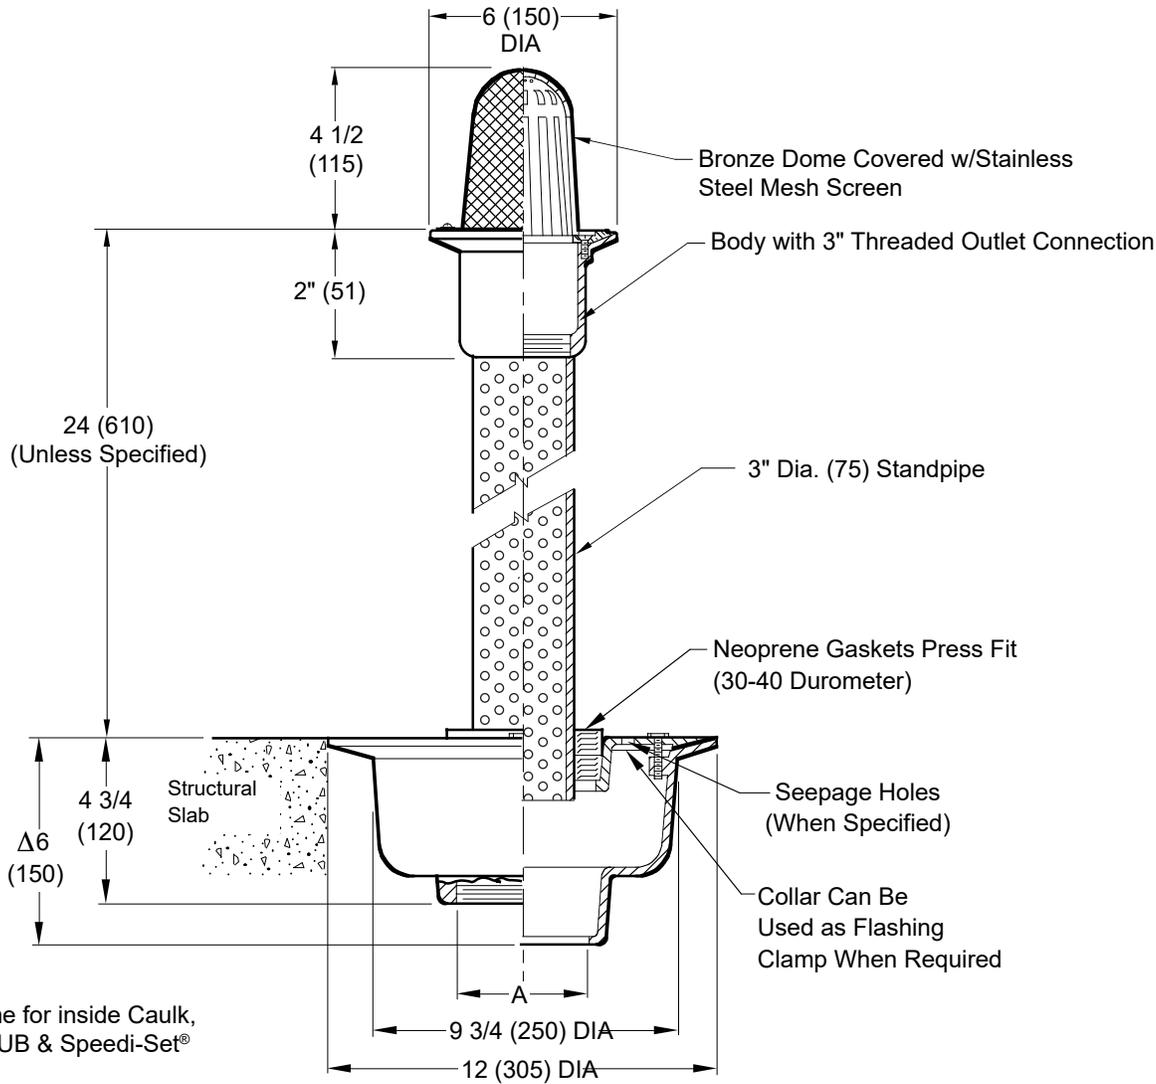

ΔSame for inside Caulk, NO-HUB & Speedi-Set®

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

- Fig. 1906C . . . CAULK Outlet
- Fig. 1906T . . . THREADED Outlet
- Fig. 1906Y . . . NO-HUB Outlet

REGULARLY FURNISHED:

Duco Cast Iron Upper Body with Bronze Flashing Clamp, Secured Bronze Dome with Stainless Steel Mesh Screen. Duco Cast Iron Lower Body with Combined Flashing Clamp, Perforated PVC Standpipe and Neoprene Isolation Gasket.

VARIATIONS:

- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Solid Standpipe
- Roof Deck Plate -RDP
- Seepage Holes -WSH

OPTIONS:

- Cast Iron Standpipe
- Galvanized Cast Iron - G

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S1906
 SIZE: A
 SCALE: NONE
 DATE: 3-10-05
 APPROVED BY: AM
 CHECKED BY: AM
 DRAWN BY: RN
 FIGURE NUMBER: 1906

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1906