



JAY R. SMITH MFG. CO.
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com




MEMBER OF:



LOCATION

OVERFLOW ROOF DRAINS WITH EXTENSIONS

8 1/2" (215) DIAMETER - LOW PROFILE DOME

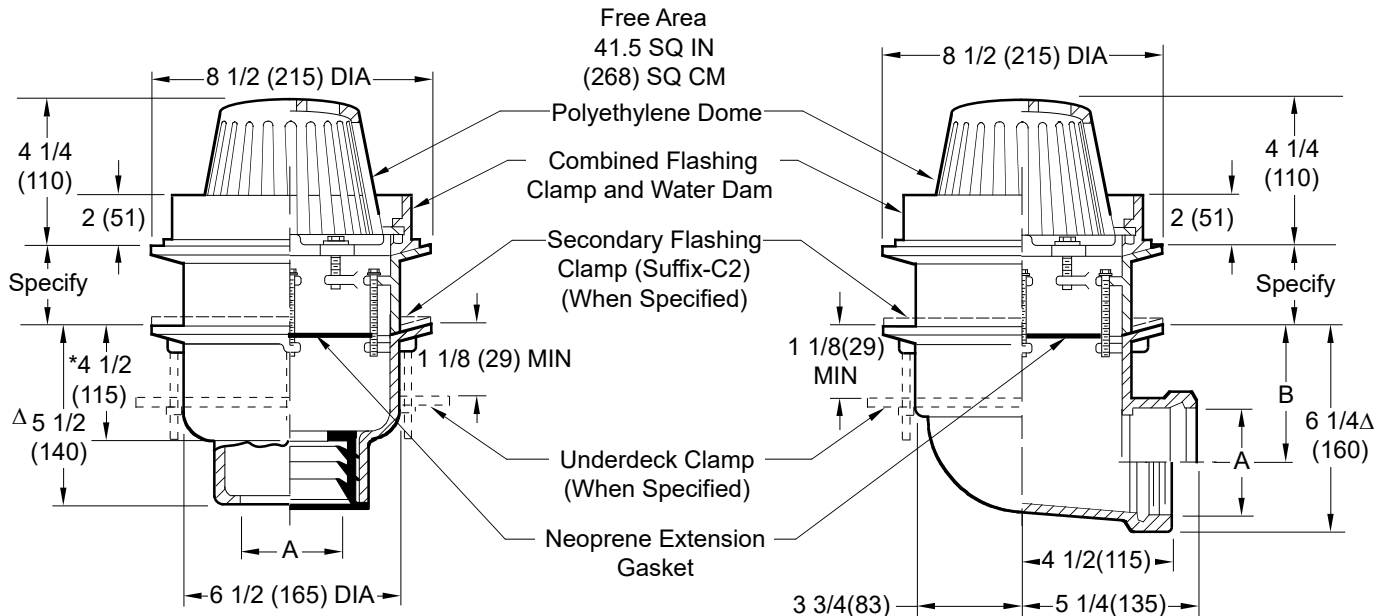

- ☐ Fig. 1330C-E-WD02 CAULK OUTLET
☐ Fig. 1330Y-E-WD02 NO-HUB OUTLET
☐ Fig. 1330T-E-WD02 THREADED OUTLET

- ☐ Fig. 1340C-E-WD02 CAULK OUTLET
☐ Fig. 1340T-E-WD02 THREADED OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)
recommended deck opening

with suffix -R	9 (230) DIA
less suffix -R	7 3/4 (195) DIA

*This Dimension to Internal Stop of Speedi-Set® Gasket.
Δ Same for Caulk, NO-HUB and Speedi-Set®, 4 1/4(110) for Threaded.

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Body and Extension with Combined Flashing Clamp and Water Dam with Polyethylene Dome.

VARIATIONS:

- ☐ Expansion Joint (Specify Fig. 1710) (Fig. 1330 only)
☐ L Speedi-Set® Service Weight (Fig. 1330 only)
☐ LXH Speedi-Set® Extra Heavy (Fig. 1330 only)
☐ Secondary Flashing Clamp -C2
☐ Sump Receiver -R
☐ Underdeck Clamp -C
☐ Vandal Proof Dome -U
☐ Roof Deck Plate -RDP
☐ 2 1/2 (64) Water Dam -WD025

OPTIONAL MATERIALS:

- ☐ Aluminum Dome -AD
☐ Cast Iron Dome -CID
☐ Galvanized Cast Iron -G
☐ Rough Bronze Dome -RBD

DRAWING NUMBER
s1330-E-WD02, 1340-E-WD02

SIZE
A

SCALE:
NONE

DATE:
8-6-70

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
TB

1330-E-WD02, 1340-E-WD02

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY
------	------	-------------	----	---------

WEIGHT
POUNDS

VOLUME
CUBIC FEET

FIGURE NUMBER

1330-E-WD02
1340-E-WD02



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov