

RAH-CM Series**Roof Access Hatch - Curb Mount**

Roof Access Hatch Curb Mounts are designed to provide convenient, cost saving access to the roofs of buildings, allowing for ladders and stair access to the roof from the interior of the building. Elmdor Roof Access Hatches are designed and engineered for durability and safety, with ease of installation. The Roof Access Hatch Curb Mount installs easily on a built-up curb.

Curb construction shall be 14 gage galvannealed steel with durable recoatable gray primer finish. It shall be 12" in height with 2" mounting flange for curb installation and supplied with mounting holes for securing to curb.

Cover is 14 gage galvannealed steel with radius corners for safety and shall be fully welded at the corners for watertight construction.

Latching shall include interior handle, exterior handle and provisions for a padlock, both inside and out.

Hardware shall include an automatic, hold-open arm with vinyl grip and compression springs encased in telescopic tubes for smooth door operation.

Guide Specification

Provide Elmdor RAH-CM series, Roof Access Hatch Curb Mount (specify model number and options). Roof hatch shall be fabricated from 14 gage galvannealed steel on both curb and cover. Compression springs encased in zinc-plated telescopic tubes shall be provided for smooth operation of the cover. An automatic hold-open arm with vinyl grip will be furnished. Latching shall include both interior and exterior handles with provisions for a padlock both inside and out and shall be supplied with a 2" curb mount flange furnished with mounting holes for securing in place with hardware furnished by others.



Member of U.S. Green
Building Council



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

RAH-CM Roof Access Hatch-Curb Mount

Suffix Options


- F FESCO

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W X H)	FRAME INNER DIMENSION (W X H)	FRAME OUTER DIMENSION (W X H)	ROOF OPENING DIMENSION (W X H)	WEIGHT
E-24" x 24" -RAH-CM-W	24" x 24"	31" x 31"	24" x 24"	84 lbs.
E-24" x 30" -RAH-CM-W	24" x 30"	31" x 37"	24" x 30"	103 lbs.
E-24" x 36" -RAH-CM-W	24" x 36"	31" x 43"	24" x 36"	124 lbs.
E-30" x 30" -RAH-CM-W	30" x 30"	37" x 37"	30" x 30"	129 lbs.
E-30" x 36" -RAH-CM-W	30" x 36"	37" x 43"	30" x 36"	155 lbs.
* E-30" x 54" -RAH-CM-W	30" x 54"	37" x 61"	30" x 54"	233 lbs.
* E-30" x 96" -RAH-CM-W	30" x 96"	37" x 103"	30" x 96"	413 lbs.
E-36" x 36" -RAH-CM-W	36" x 36"	43" x 43"	36" x 36"	185 lbs.
E-36" x 48" -RAH-CM-W	36" x 48"	43" x 55"	36" x 48"	248 lbs.
E-48" x 48" -RAH-CM-W	48" x 48"	55" x 55"	48" x 48"	330 lbs.

* "W" or "H" greater than 48": The hinge will be positioned onto the larger side.

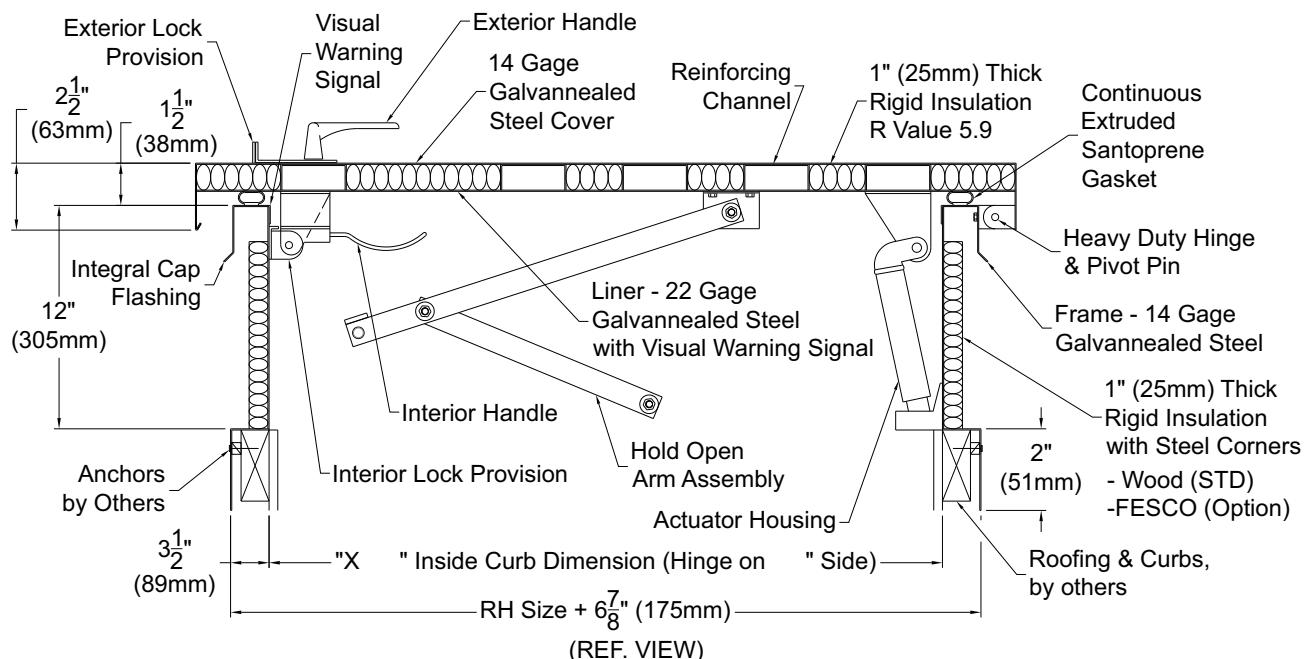

(REF. VIEW)

 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	