
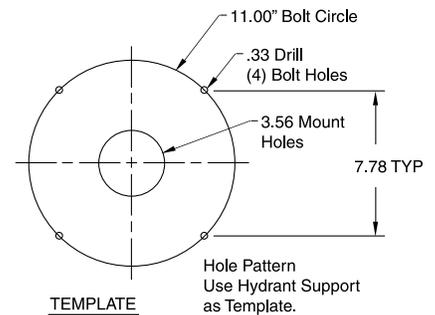
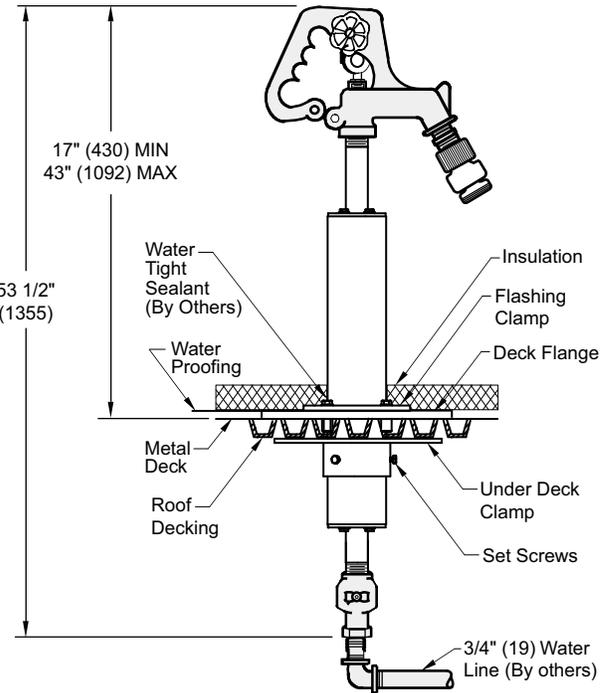


M-3907 NON-FREEZE ROOF HYDRANT

FUNCTION: Provides water availability for window washing, cleaning of condenser coils, cooling towers and other types of roof equipment. Valve body of hydrants are drilled and tapped with 1/8" drain hole which must be piped to a drain location. The check valve prevents backflow due to low head-pressure.

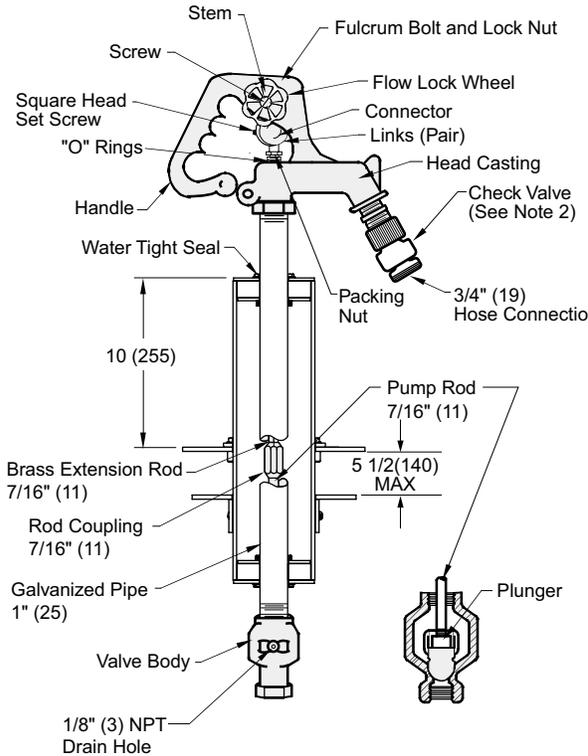

NOTE:

1. Drain Hole must be piped and discharged to an accessible discharge point. Failure to do so will result in potential water damage which Murdock is not responsible.
2. Hose must be removed to allow proper draining of the casing. Murdock is not responsible for any casing that burst or related incidents if the hose is not removed.
3. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water System Components are not applicable to these hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
4. Dimensions shown in parentheses are in millimeters.
5. FOR IRRIGATION PURPOSES ONLY.

REGULARLY FURNISHED:

Non-Freeze Roof Hydrant with Check Valve, Galvanized Casing and Adjustable Flow Wheel Lock Handle with Deck Flange and Under Deck Clamp.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

| | | | |
|---|--|----------------|--|
| SELECTION SUMMARY & APPROVAL FOR MANUFACTURING | Model Number & Options _____ | Quantity _____ | All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications. |
| | Company _____ | | |
| | Contact _____ | Title _____ | |
| | Signature (Approval for Manufacturing) _____ | Date _____ | |