


TILE FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TILE RECESS

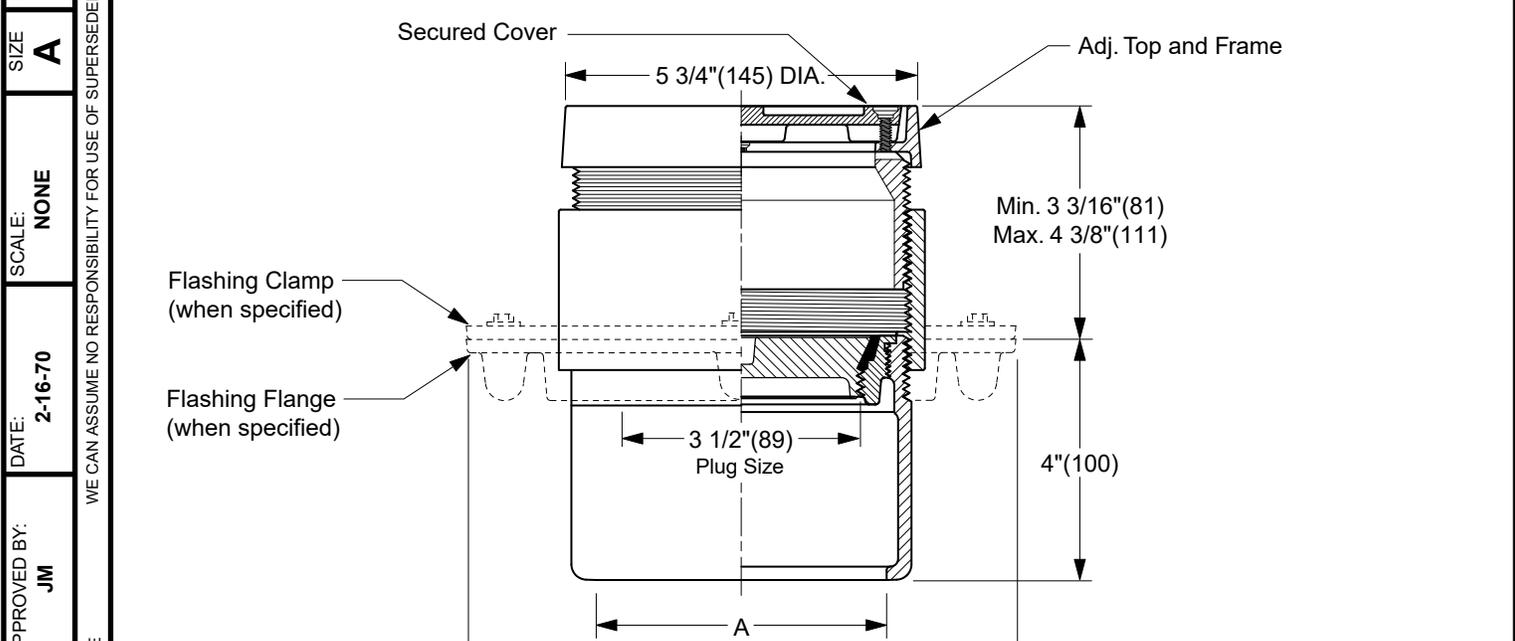

NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

TWIS-TO-FLOOR® ADJUSTMENT
INSIDE CAULK OUTLET
"A" (Pipe Size) = 02(50), 03(75) or 04(100)
Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4145C.....Gasket Seal - ABS Plug
- Fig. 4146C.....Gasket Seal - Bronze Plug
- Fig. 4148C.....Taper Thread - Bronze Plug
- Fig. 4149C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)
NOTE: Dimensions shown in parentheses are in millimeters.

4145 SERIES	REGULARLY FURNISHED:	Duco Cast Iron Cleanout with Round Adjustable Secured Nickel Bronze Top with 1/8"(3) Tile Recess. Closure Plug Type as Indicated By Figure Number Selected.	VARIATIONS:	<input type="checkbox"/> Flashing Flange -F <input type="checkbox"/> Flange with Flashing Clamp -F-C <input type="checkbox"/> Vandal Proof Top -U	OPTIONAL MATERIALS:	<input type="checkbox"/> Galvanized Cast Iron -G <input type="checkbox"/> Polished Bronze Top -PB
	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE					

FIGURE NUMBER	M L K J	4-11-24 8-16-23 1-20-22 12/17/04	Added ASME Note Removed Function Removed "C.O." cast in" Added Core-Drilling Note	HS HS KK JJ	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4145 SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY				