

Contour Urinal Wall Supply



Model 8944-W-1
Contour HEU Urinal
Wall Supply, Off-Floor, Wall Waste


All urinals specified on this sheet are configured with a 3/4" NPTE back spud inlet for a wall supply (concealed) flush valve (flush valve sold separately).

- **Rounded Front Commercial HEU WASHOUT Urinal Requiring Commercial Water Supply Line to separate. Water Flow Pressure 25 psi (1.72 bars); Water Supply Line 3/4" (19 mm).**
- **WALL SUPPLY (Concealed) Flush Valve Configuration Compatible Flush Valve (Sold Separately) requiring a 1/8 GPF (0.47 Liters per Flush) to 1/2 GPF (1.8 Liters per Flush) flush valve.**
- **18-Gauge Stainless Steel Construction With 16-Gauge Bowl With a #4 Satin Finish is Standard; Also Available in Mira Finish (High Polish)**
- **ADA Compliant Urinals are Compliant when Properly Installed** 
- **ANSI, UFAS Compliant**

ADA COMPLIANT



Properly mounted 8944-W urinals are ADA Compliant. ADA compliance is subject to the interpretation and requirements of local code authority. Please check your local ADA regulations



Neo-Metro is a
Member of U.S. Green
Building Council



DESCRIPTION	MODEL/OPTION #
CONFIGURATION - Required Selection	INIT.

WALL SUPPLY COMMERCIAL CONTOUR URINAL

Off-Floor, Wall Waste Configuration

- ☐ **#4 Satin Finish** (Standard)
8944-W
- ☐ **Mira Finish** (High Polish)
8944-W-HP
- ☐ **White Gloss powder coat**
8944-W-EG10
- ☐ **Matte Black powder coat**
8944-W-EG22

Add(+)

FLUSH VALVE SELECTION	INIT.
-----------------------	-------

Wall Supply (Concealed) Flush Valves

Requires a high efficiency type rated at 1/8 GPF (0.47 Liters per Flush) to 1/2 GPF (1.8 Liters per Flush) flush valve. Urinal is supplied with 3/4" NPT flushing inlet connection and 1-1/2" OD plain end P-Trap.



☐ Manual Flush

- ☐ 1/8 GPF FV-W
- ☐ 1/8 GPF FV-W-H - Hydraulic
- ☐ 1/2 GPF FV-W (Not Available in California)
- ☐ 1/2 GPF FV-W-H - Hydraulic (Not Available in California)


☐ Flush Valve By Others

CONSTRUCTION AND PLUMBING INFORMATION

Must Specify: Wall Thickness _____

Must Specify: Wall Type _____
(Eg. drywall with tile, concrete, etc)

Flush Valve Accessories on the next page



Contour Urinal Wall Supply



Model 8944-W-1
Contour Urinal
Wall Supply, Off-Floor, Wall Waste

**Orders will not be
processed until
specification sheets
are complete and signed.
NO CANCELLATIONS.**

DESCRIPTION	MODEL/OPTION #
FLUSH VALVE ACCESSORIES	
14" x 14" Flush Valve Access Panel	
☐ #4 Satin Finish with Push Button Hole	4080-000-001
☐ Mira (High Polish) with Push Button Hole	4080-030-001
☐ #4 Satin Finish No Hole	4080-035-001
☐ Mira (High Polish) No Hole	4080-036-001

APPROVAL FOR MANUFACTURE

COMPANY: _____

PROJECT NAME: _____

SIGNEE'S NAME WRITTEN CLEARLY: _____

DATE: _____

AUTHORIZED SIGNATURE: _____




Contour Urinal Wall Supply

PRODUCT Specification . . . Contour Urinal is a washout type urinal. Fixture is fabricated from 18-gauge housing and 16-gauge Bowl, Type 304 stainless steel. A #4 Satin Finish stainless steel is standard. The urinal is also available in Mira Finish (High Polished) stainless steel. Fixture includes exposed spray nozzle and beehive dome strainer. Contoured surface makes for easy cleaning. Urinals shall be wall mounted with recommended rim height of 20" (508 mm) above finished floor. Urinals meet ASME/ANSI guidelines as outline in A112.19.2.

 The urinal is ADA compliant if installed with rim height of 17" (432 mm) and appropriate flush valve is used. ADA compliance is subject to the interpretation of requirement of the local code authority. Please check your local accessibility code requirements.

PLUMBING Specification . . . Wall mounted washout urinal utilizes a commercial supply line (3/4" or 19mm) water inlet into flush valve and 3/4" NPTE (19mm) water inlet into fixture and 2" (51mm) in-wall waste line. The urinal is supplied with a stainless steel beehive dome strainer and 1-1/2" P-Trap assembly Check applicable plumbing codes. Model 8944-W-1 is configured with a back spud inlet for Wall Supply (Concealed) flush valve. Flush valve sold separately. Compatible flush valves rated at 1/8 gallon (0.47 Liters) to 1/2 gallon (1.89 Liters) per flush.

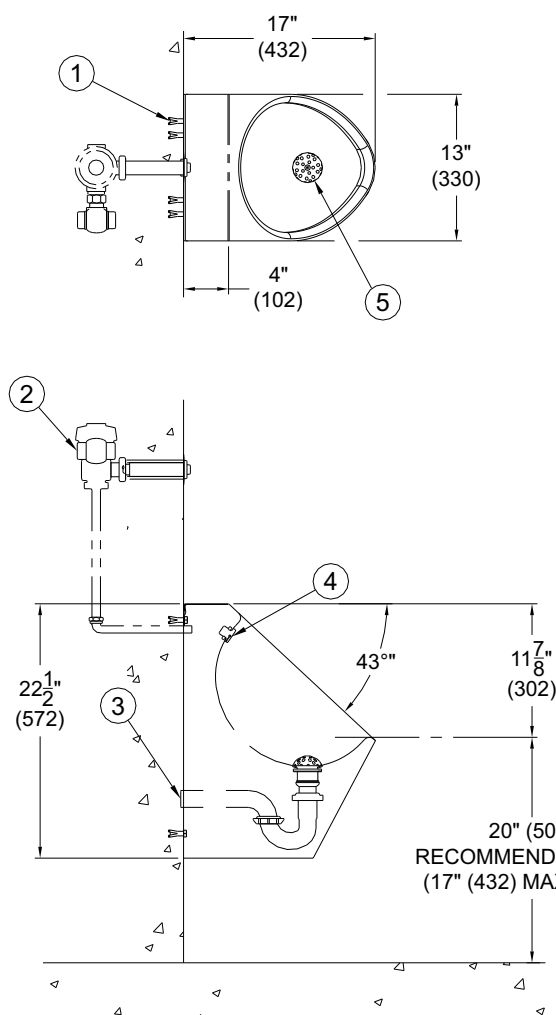


1. Wall Mounting Anchor (By Others)
2. -W Wall Supply -FV Flush Valve
3. 1-1/2" O.D. P-Trap Assembly
4. Flush Nozzle
5. Removable Strainer Assembly



* ADA COMPLIANT

Properly mounted 8944-W urinals are ADA Compliant. The rim of the urinal is recommended no more than 17" (432 mm) above finished floor. An ADA compliant flush valve must also be used.

ADA compliance is subject to the interpretation and requirements of local code authority. Please check your local accessibility regulations.

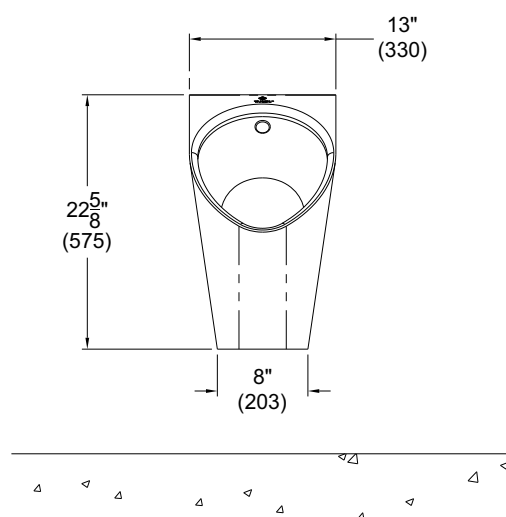

Neo-Metro assumes no responsibility for use of void or suspended data. All dimensions are nominal and subject to manufacturer change without notice.

INSTALLATION INSTRUCTIONS ARE AVAILABLE