
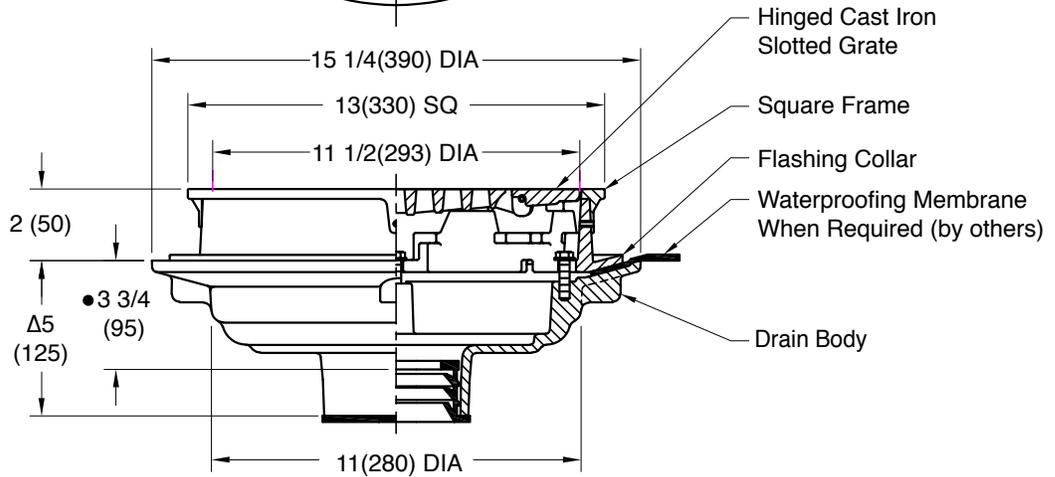


FLOOR DRAINS

LIGHT DUTY DRAIN WITH SQUARE FRAME AND HINGED ROUND GRATE

Free Area
 33.50 Sq. In.
 (216 Sq. Cm.)

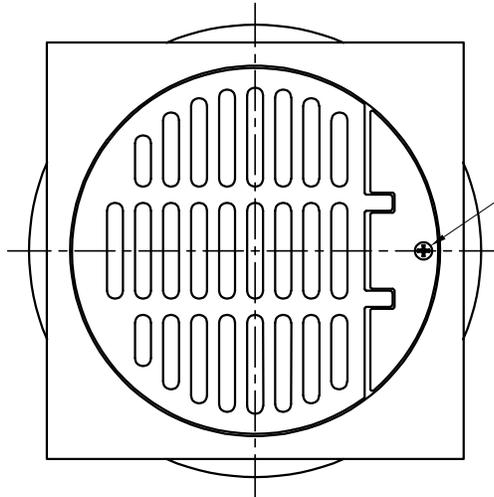

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125), 06(150)

- Fig. 2130C-S-H. . . . CAULK OUTLET
- Fig. 2130Y-S-H NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Body, Flashing Collar with Square Frame and Secured Hinged Slotted Grate.

Δ Same for No-Hub and Speedi-Set®. Caulk and Threaded is 3 3/4(95)

- This dimension to stop of Speedi-Set® Gasket.

VARIATIONS:

- L Speedi-Set® Service Weight 02(50), 03(75) & 04(100) sizes
- LXH Speedi-Set® Extra Heavy 02(50), 03(75), & 04(100) sizes
- Trap Primer Connection - P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Dome -U
- T Threaded Outlet
- Sediment Bucket -B
- Flat Bottom Strainer -FBS

OPTIONAL MATERIALS:

- Galvanized Cast Iron Body -G
- Polished Bronze Strainer -PB
- Acid Resistant Coated Cast Iron - ARC

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
s2130-S-H

SIZE
A

SCALE:
NONE

DATE:
11-3-21

APPROVED BY:
CR

CHECKED BY:
CR

DRAWN BY:
KK

2130-S-H

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| | | | | | |
|---------------|------|-------------|-------------------------|---------|----|
| FIGURE NUMBER | A | 3-10-23 | Added ® to "Speedi-Set" | KK | CL |
| REV. | DATE | DESCRIPTION | BY | CKD. BY | |

| | |
|---------------|-------------------|
| WEIGHT POUNDS | VOLUME CUBIC FEET |
| | |

| |
|----------------------|
| FIGURE NUMBER |
| 2130-S-H |