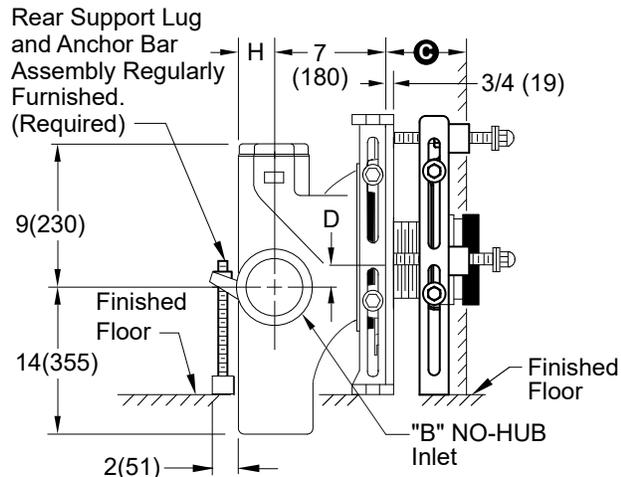
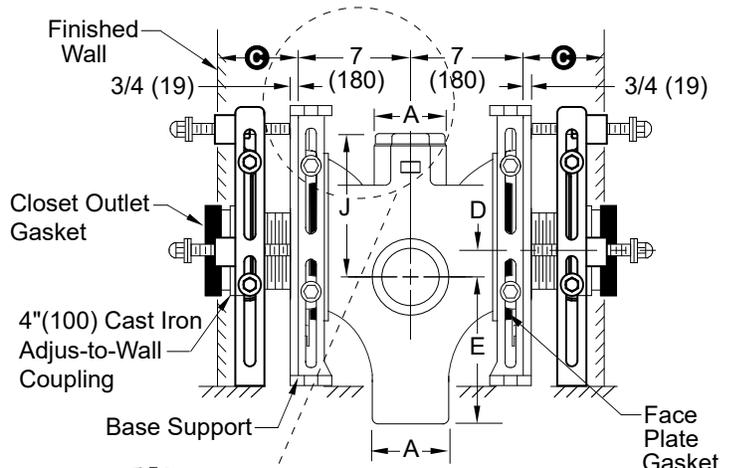


# ADJUSTABLE FIXTURE SUPPORTS SHALLOW ROUGH-IN



## NO-HUB VERTICAL FITTINGS WITH SIDE INLET BARIATRIC DUTY - 1000 LBS.



**Fig. 0240LY-M58-M54-XK**  
Side View  
SINGLE



**Fig. 0240DY-M58-M54-XK**  
Side View

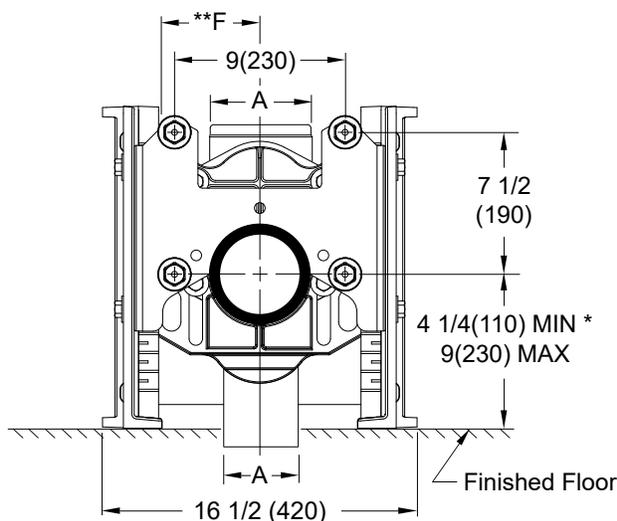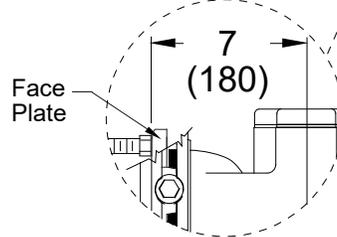

**Front View**  
SINGLE

- Fig. 0240LY-M58-M54-XK... NO-HUB L.H. Inlet
- Fig. 0240RY-M58-M54-XK... NO-HUB R.H. Inlet
- Fig. 0240DY-M58-M54-XK... NO-HUB Double

Jay R. Smith 0240Y-M58-M54-XK complies with and/or exceeds all requirements of ASME A112.6.1M up to 1000 lbs.

A x B SIZE	MIN	D MAX	E	**F	H	J
4(100) x 4(100)	1 1/2(38)	4 1/4(110)	14(355)	5 1/4(135)	2 1/4(57)	9(230)
5(125) x 4(100)	1 1/2(38)	4 1/4(110)	11 1/2(290)	6 1/2(165)	2 3/4(70)	11 1/2(290)
6(150) x 4(100)	1 1/2(38)	4 1/4(110)	11 1/2(290)	6 1/4(160)	3 1/4(83)	11 1/2(290)

**NOTE:** Base support must be securely anchored to floor with 1/2" (13) anchors able to withstand a pull-out force of 500 lbs (227 kg). The rear anchor bar must be securely anchored to floor with 1/2" (13) anchors able to withstand a pull-out force of 1000 lbs (454 kg). Pull-out forces are calculated values, no safety factor has been applied.

**NOTE:** Shallower minimum rough-in dimension to accommodate lower rough bowls available. Specify dimension required.

**NOTE:** 1 1/2"(38) or 2"(51) tapped inlet available. Add suffix -N.

**NOTE:** \*9"(230) core drilled hole is required for rough-in 4 1/4(110) thru 6 1/2(165).

**NOTE:** Ⓞ Dimension = 4 1/4"(110) - 4 3/4"(120) with regularly furnished 5 1/4"(135) cast iron nipple.

**NOTE:** Dimensions shown in parentheses are in millimeters.

\*\* dimension is from centerline of vent to centerline of stack.

DRAWING NUMBER: S0240Y-M58-M54-XK

SCALE: NONE

DATE: 10/10/07

APPROVED BY: CL

CHECKED BY: CL

DRAWN BY: JJ

FIGURE NUMBER: 0240Y-M58-M54-XK

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
F	6-19-24	Revised Chart	HS	CL			<b>0240Y-M58-M54-XK</b>
D	6-10-22	Revised Figure Options	KK	CL			
J	11/20/09	3/4 (19) was 1/2 (13)	JJ	CL			
C	10/08/08	Corrected Support Views	JJ	CL			