

Shower Series

MODEL M-PCS24 TWO STATION POOL AND BEACH SHOWER

STANDARD FEATURES

- Pushbuttons requiring less than 5 pounds for activation
- Adjustable Timing, from 5 to 60 seconds
- Chrome plated brass Showerheads with 1.6 GPM Flow Controls and adjustable spray pattern
- Vandal resistant fasteners
- Shut-off Valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish
- 1/4" Thick, Anchor Plate with O-ring x 3/4" NPT inlet connection provided

SUGGESTED SPECIFICATIONS

Column Shower shall be Murdock model M-PCS24, dual station Shower. Unit is to be pre-piped and hydrostatically tested.

Valves shall have internally mounted metering Valves, Pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Showerheads shall be chrome plated brass with 1.6 GPM Flow Restrictors and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel Anchor Plate, providing secure mounting for Shower.

MODEL:

(Must Specify)

- M-PCS24 Satin Stainless Finish (Shown)
- M-PCS25 Green Powder-Coated
- M-PCS26 Red Powder-Coated
- M-PCS27 Blue Powder-Coated

Custom color finishes available upon request

Complies with the following standards:




Federal Public Law 111-380 (No Lead)



Recyclable Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Please visit www.murdockmfg.com for most current specifications.

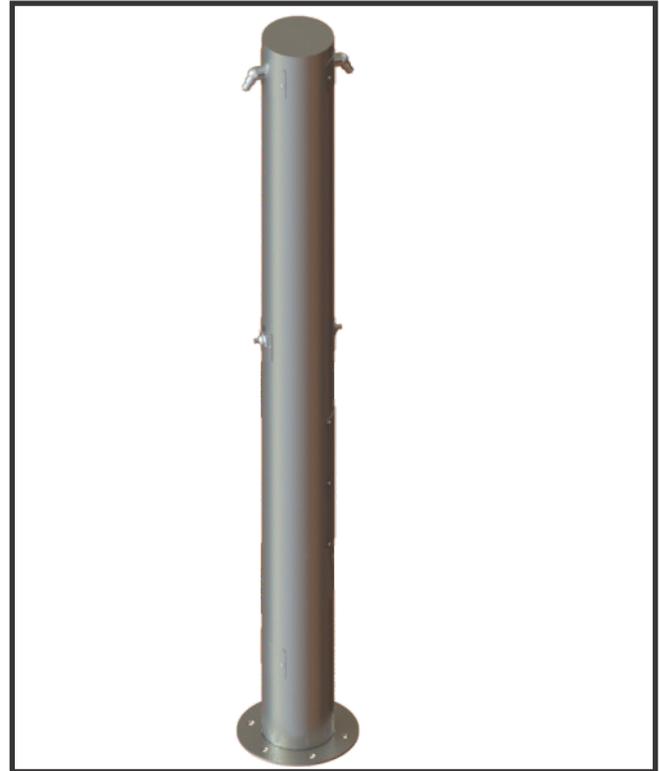

M-PCS24 Shown

OPTIONS

(additional costs may be incurred)

- FRU2 Underground freeze-resistant valve for two pushbuttons (IAP Option Required)^{1, 2}
- FRU3 Underground freeze-resistant valve for three pushbuttons (IAP Option Required)^{1, 2}
- FRU4 Underground freeze-resistant valve for four pushbuttons (IAP Option Required)^{1, 2}
- FS Foot Shower at one station¹
- FS2 Foot Shower at two stations¹
- GB Two Vertical Grab Bars for Barrier Free Station: Includes Additional Pushbutton and Lower Shower Head at 48" ¹ (Not available with -FS2)
- IAP In-ground anchor plate (Required with -FRU Option, replaces standard Anchor Plate)²
- HB1 Hose Bibb, exposed compression with Hose outlet thread VB^{1, 3}
- HB2 Hose Bibb, exposed Loose Key with Hose outlet thread VB^{1, 3}
- HB3 Hose Bibb, Loose Key, Vandal Resistant with Hose outlet thread VB^{1, 3}
- LOGO Customer specified logo¹

Options Notes:


¹ See separate option sheet.

² IAP required for FRU Freeze Resistant Valve options.

³ The Hose Bibb option is not available or included with the FRU freeze-resistant components.

Shower Series

**MODEL M-PCS24
TWO STATION POOL
AND BEACH SHOWER**

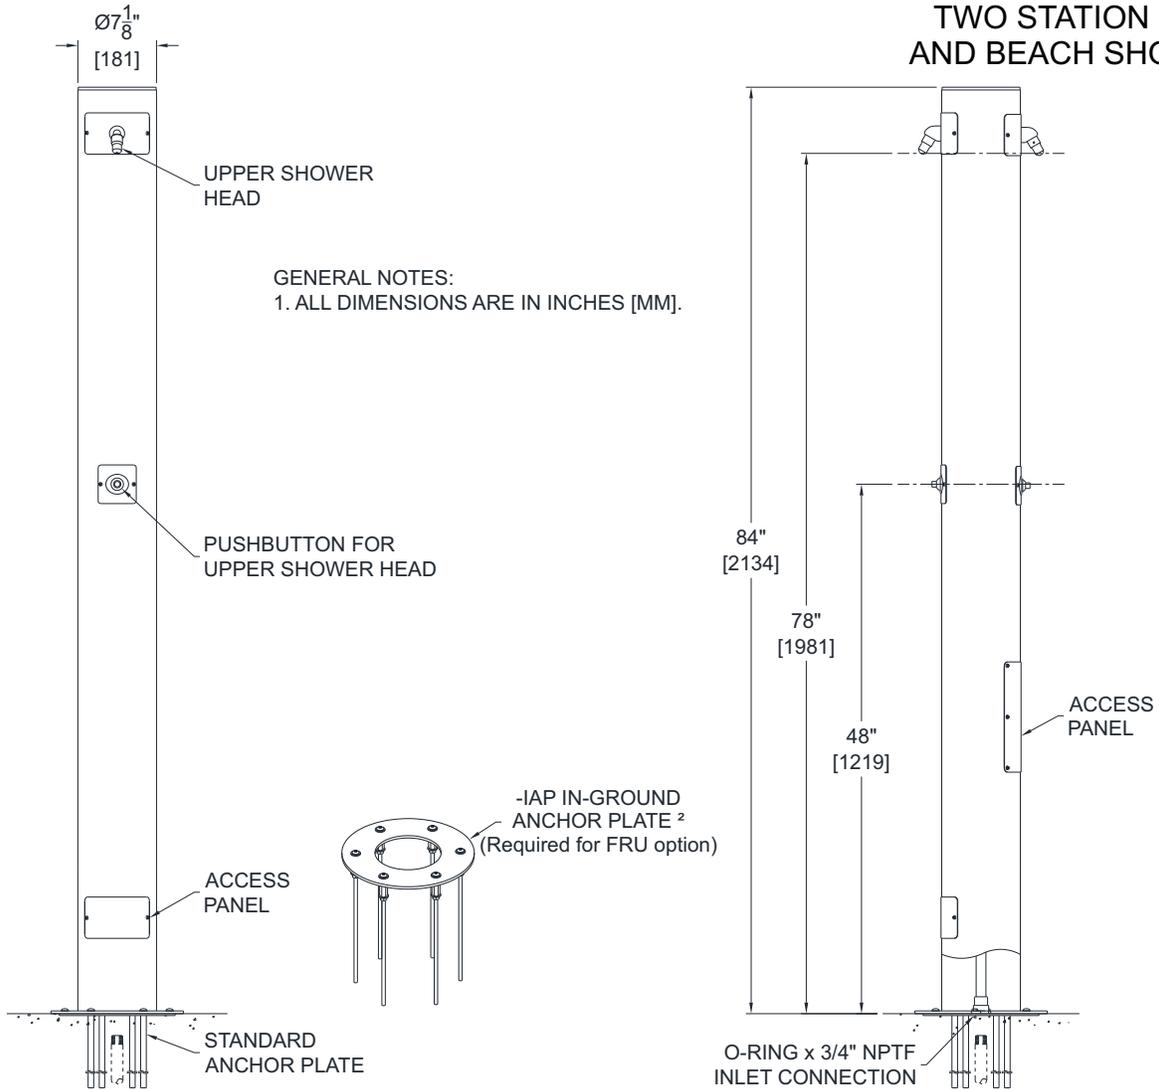

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.