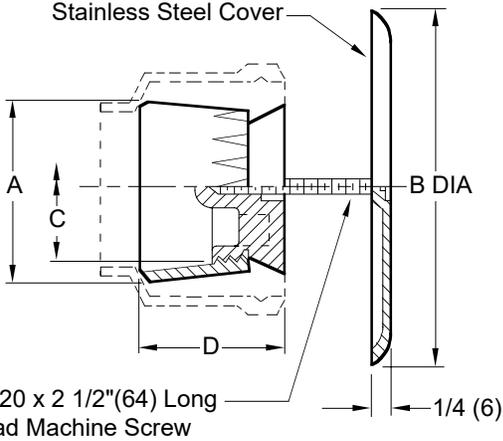


CAULK FERRULE CLEANOUTS WITH ACCESS COVERS

LEAD SEAL PLUG WITH ROUND COVER

 DRAWING NUMBER S4400
 SIZE A
 SCALE: NONE
 DATE: 2-16-70
 APPROVED BY: JM
 CHECKED BY: BH
 DRAWN BY: RK
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


- COUNTERSUNK PLUG**
- Fig. 4400C LESS COVER AND SCREW
 - Fig. 4402C WITH COVER AND SCREW

A SIZE	B DIA	C SIZE	D
02 (50)	4 1/4 (110)	1 1/2 (38)	2 1/2 (64)
03 (75)	5 1/2 (140)	2 1/2 (64)	2 3/4 (70)
04 (100)	5 1/2 (140)	3 1/2 (89)	3 (76)
06 (150)	9 1/4 (235)	5 1/2 (140)	3 (76)

Conforms to ASME A112.36.2/CSA B79.2

REGULARLY FURNISHED:
 Duco Cast Iron Caulk Ferrule and
 Cast Iron Lead Seal Plug with Stainless
 Steel Round Cover and Screw when
 indicated by Fig. Number.

- VARIATIONS:**
- Longer Screw 6"(150) Lg. -LS
 - "T" Handle Plug -TH
 Plug tapped 1/4"(6) - 20 Thread
 - Vandal Proof Screw -U

- OPTIONAL MATERIALS:**
- Cast Bronze Plug -BP
 - Polished Bronze Cover -PB
 - Prime Coated Steel Cover -PC

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	L K J H	10-11-24 4-11-24 2-28-24 8-17-23	Revised Table Added ASME Note Revised Optional Materials Removed Function	HS HS HS HS	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4400, 4402
REV.	DATE	DESCRIPTION	BY	CKD. BY				