

E

LOCATION

DRAWING NUMBER  
s1900SIZE  
ASCALE:  
NONEDATE:  
10-4-06APPROVED BY:  
CELCHECKED BY:  
CLDRAWN BY:  
RN


1900

FIGURE  
NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# GREEN ROOF MAIN AREA DRAIN WITH STANDPIPE

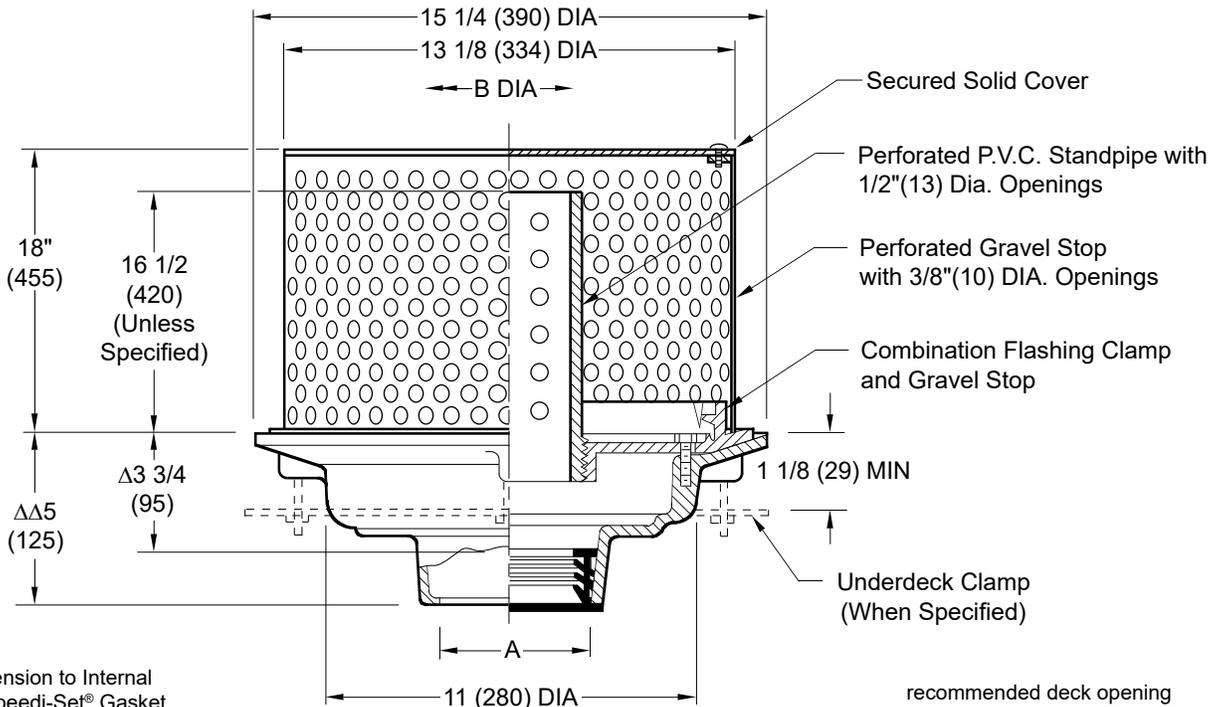

Δ This Dimension to Internal Stop of Speedi-Set® Gasket.

ΔΔ Same for Caulk, NO-HUB and Speedi-Set®. 3/4 (95) for Threaded.

recommended deck opening

with suffix -R	17 (430) DIA
less Suffix -R	14 (355) DIA

A(Pipe Size)	02(50)	03(75)	04(100)	05(125)	06(150)	08(200)
B (DIA)	4(100)	4(100)	4(100)	6(150)	6(150)	8(200)

- Fig. 1900C . . . . . CAULK OUTLET
- Fig. 1900T . . . . . THREADED OUTLET
- Fig. 1900Y . . . . . NO-HUB OUTLET

### REGULARLY FURNISHED:

Duco Cast Iron Body, Flashing Clamp and Stainless Steel Perforated Gravel Stop with 3/8"(10) DIA. Openings and Secured Solid Cover and P.V.C. Perforated Internal Standpipe.

### VARIATIONS:

- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set® Service Weight  
02(50), 03(75) & 04(100) sizes only
- LXH Speedi-Set® Extra Heavy  
02(50), 03(75) & 04(100) sizes only
- Sump Receiver -R
- Underdeck Clamp -C
- Roof Deck Plate -RDP
- Extension -E
- Adjustable Extension -AE
- Vandal Proof Cover -U

### OPTIONAL MATERIALS:

- Galvanized Cast Iron Body and Collar -G

**NOTE:** Dimensions shown in parentheses are in millimeters.

E	9-27-24	Revised Variations	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>1900</b>
D	3-8-23	Added ® to "Speedi-Set"	KK	CL			
C	04/19/10	Added 16 1/2 unless specified	JJ	TK			
B	03/25/10	Removed SQ note	JJ	TK			
REV.	DATE	DESCRIPTION	BY	CKD. BY			



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov