
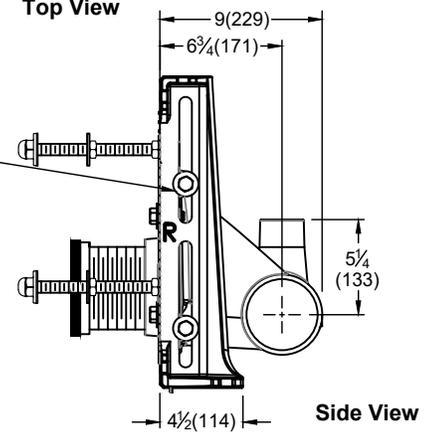
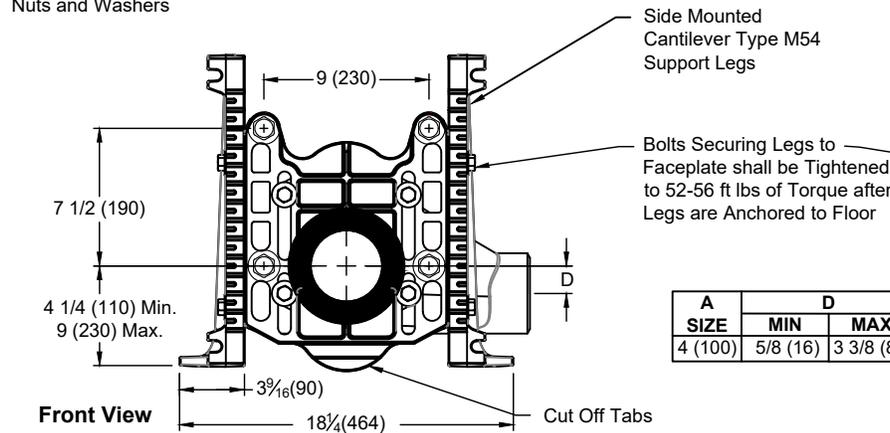
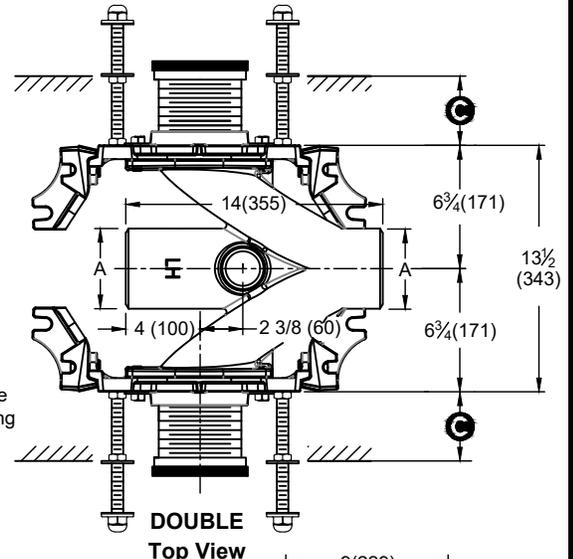


# ADJUSTABLE FIXTURE SUPPORTS

## FOR SIPHON JET WATER CLOSETS

### NARROW WALL HORIZONTAL WATER CLOSET SUPPORTS

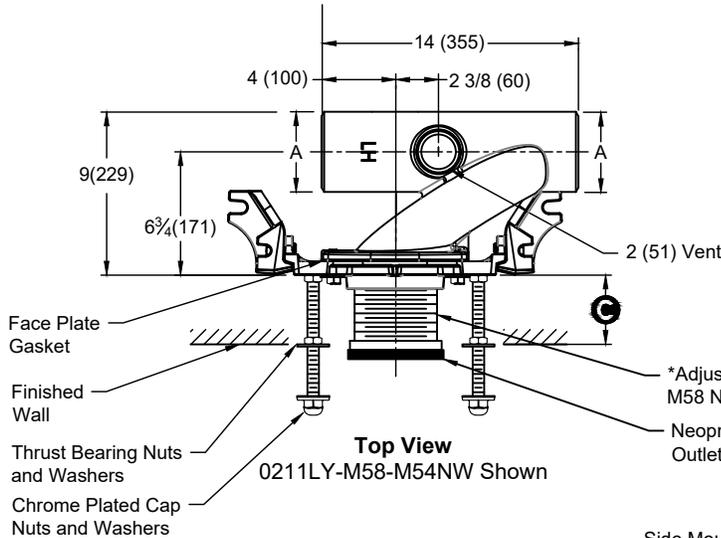

A SIZE	D	
4 (100)	MIN	MAX
	5/8 (16)	3 3/8 (87)

Conforms with the requirements of ASME A112.6.1M up to a 500lbs (227KG) static load rating, without a rear anchor.


- Fig. 0211DY(-M58-M54NW) . . . NO-HUB Double
- Fig. 0211LY(-M58-M54NW) . . . NO-HUB Left Hand
- Fig. 0211RY(-M58-M54NW) . . . NO-HUB Right Hand

	MIN	MAX
10 (255)	8 3/4" (222)	9 3/4" (247)

\*NOTE: When nipple lengths between 3 1/4"(83) and 9 3/4"(247) are specified, the 10"(255) nipple will be supplied. The threaded end of nipple must be cut to specified length by others. Absolute minimum dimension is 1 1/2"(38).

**NOTES:**

1. Support must be securely anchored to the structural slab with **one** 1/2" (13) anchor per support leg, **each** able to withstand a pull-out force of 1750 lbs (974 kg). Pull-out force is a calculated value, no safety factor has been applied.
2. The side mounted Cantilever Type M54 support legs do not require a rear anchor on the fitting.
3. Cast iron components are Duco coated.
4. Dimensions shown in parentheses are in millimeters.

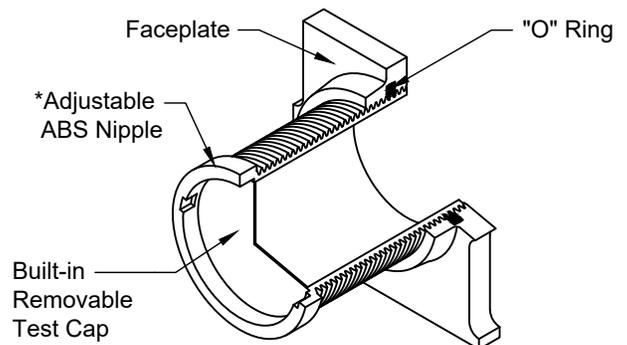

\*ABS (Regularly Furnished)

DRAWING NUMBER: s0211Y-M58-M54NW

SIZE: A

SCALE: NONE

DATE: 5-15-24

APPROVED BY: DP

CHECKED BY: CL

DRAWN BY: HS

FIGURE NUMBER: 0211Y (-M58-M54NW)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
C	2-13-25	Added Double Option	HS	CL			0211Y (-M58-M54NW)
B	6-27-24	Revised Notes	HS	CL			
A	6-25-24	Revised Notes	HS	CL			