

H



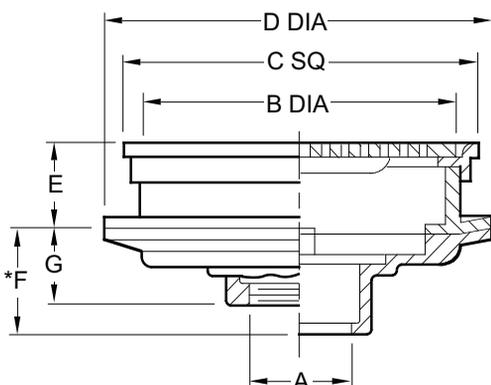
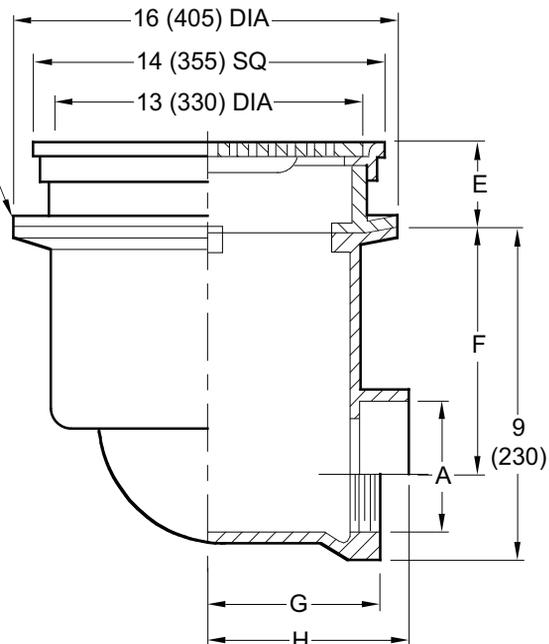
SMITH MFG. CO.
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



MEMBER OF:

LOCATION

SPECIAL PURPOSE DRAINS

Anchor or
Flashing
Flange

- Fig. 6010C ... CAULK OUTLET
- Fig. 6010T ... THREADED OUTLET
- Fig. 6020C ... CAULK OUTLET
- Fig. 6020T ... THREADED OUTLET

- Fig. 6025C ... CAULK OUTLET
- Fig. 6025T ... THREADED OUTLET

Fig. No.	A SIZE	B DIA	C SQ	D DIA	E	F *	G	Free Area
6010	02(50), 03(75), 04(100)	7 1/2 (190)	8 1/2 (215)	11 1/2 (290)	1 3/4 (44)	3 3/4 (95)	2 (51)	13 SQ IN (84) SQ CM
6020	04(100), 05(125), 06(150)	12 3/4 (325)	14 (355)	15 3/4 (400)	2 1/2 (64)	3 3/4 (95)	3 3/4 (95)	42 SQ IN (271) SQ CM

* Same Dimension for Caulk or NO-HUB

A SIZE	E	F	G	H	Free Area
04 (100)	2 1/2 (64)	5 7/8 (149)	6 (150)	6 3/4 (170)	42 SQ IN
05 (125)	2 1/2 (64)	5 (125)	6 5/8 (168)	7 3/4 (195)	42 SQ IN
06 (150)	2 1/2 (64)	4 1/2 (115)	6 7/8 (175)	7 3/4 (195)	42 SQ CM

NOTE: 04"(100) size requires a transition collar (not shown in above illustration) which fits between the body and collar. Above illustration is typical for the 05"(125) & 06"(150) sizes.

REGULARLY FURNISHED:

Fig. 6010 - Duco Cast Iron Body and Anchor Flange with Secured Chrome Plated Bronze Grate and Frame.

Fig. 6020 and 6025 - Duco Cast Iron Body and Anchor Flange with Secured Nickel Plated Bronze Grate and Frame.

VARIATIONS:

- NO-HUB Adaptor (Specify Fig. 2646Y) (6020, 6025 only)
- Vandal Proof Screws -U
- Y NO-HUB Outlet (6010 only)

OPTIONAL MATERIALS:

- Duco Cast Iron Grate -CI (Fig. 6010 only)
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: This product does not conform to or meet the requirements of ASME Standard No. A112.19.8-2007, titled "Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs." This product shall not be used in any installation in swimming pools, wading pools, spas, hot tubs as well as other aquatic facilities. Due to the potential endangerment from arduous and forceful suction, entrapment or entanglement regardless of whether it is hair, head, limbs or other body parts, this product is prohibited from installation in these applications.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER

S6010

SIZE

A

SCALE:

NONE

DATE:

3-23-83

APPROVED BY:

SJM

CHECKED BY:

DT

DRAWN BY:

BS

FIGURE NUMBER

6010,6020,6025

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

H
G
T
E

11-12-25
3-19-25
12/16/08
12/08/08

Revised Regularly Furnished
Revised Chart
Revised Chart
Revised Variations

TB
HS
RN
RN

CL
CL
CL
CL

WEIGHT
POUNDS

VOLUME
CUBIC FEET

FIGURE NUMBER

6010,6020,6025

REV.

DATE

DESCRIPTION

BY

CKD. BY



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov