


# TERRAZZO FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

**ROUND NICKEL BRONZE TOP WITH TERRAZZO RECESS AND PUSH-ON SPEEDI-SET® OUTLET**

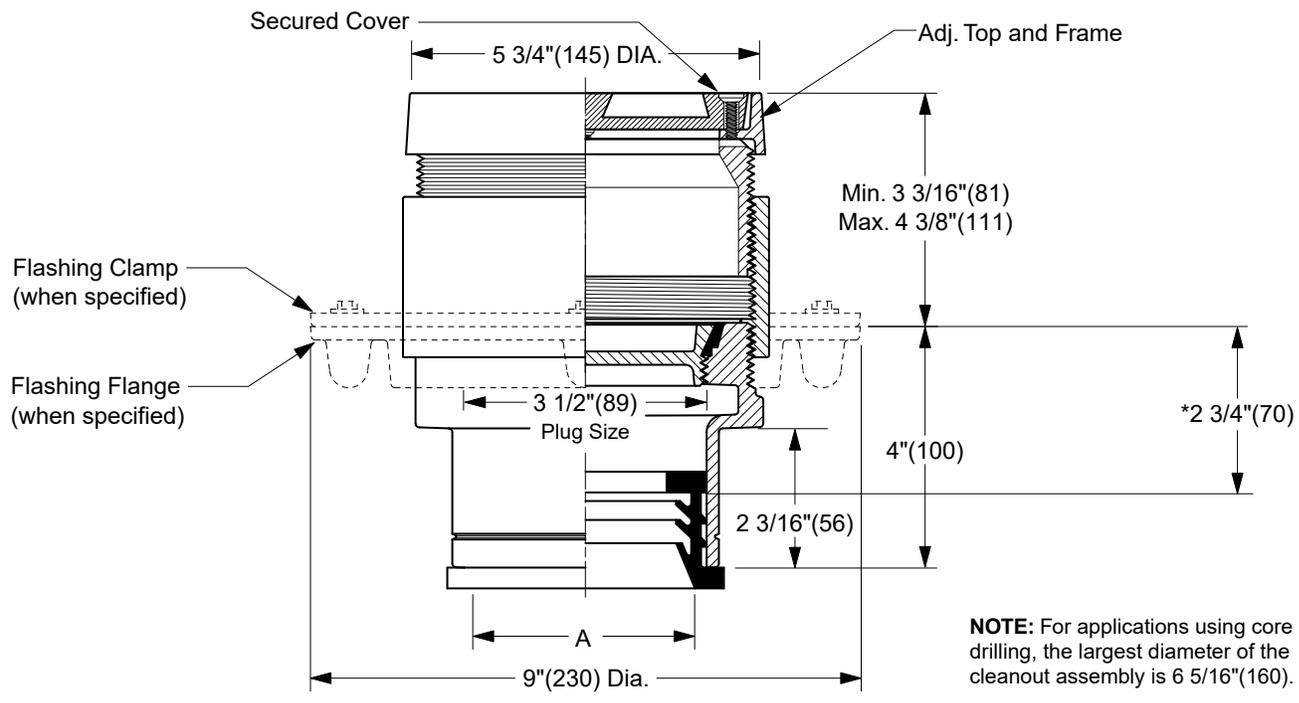

**NOTE:** For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

TWIS-TO-FLOOR® ADJUSTMENT  
SPEEDI-SET® OUTLET ▲

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

\* This Dimension to Internal Stop of Speedi-Set® Gasket.

- Fig. 4191L.....Gasket Seal - ABS Plug
- Fig. 4192L.....Gasket Seal - Bronze Plug
- Fig. 4193L.....Taper Thread - Bronze Plug
- Fig. 4194L.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

**NOTE:** Dimensions shown in parentheses are in millimeters.

**REGULARLY FURNISHED:**  
 Duco Cast Iron Cleanout with Round Adjustable Secured Nickel Bronze Top with 1/2"(13) Terrazzo Recess. Closure Plug Type as Indicated By Figure Number Selected.

**VARIATIONS:**

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

▲ Available in Extra Heavy, Service Weight or NO-HUB.

**OPTIONAL MATERIALS:**


- Galvanized Cast Iron -G
- Polished Bronze Top -PB

DRAWING NUMBER S4191  
 SIZE A  
 SCALE: NONE  
 DATE: 2-16-70  
 APPROVED BY: JM  
 CHECKED BY: BH  
 DRAWN BY: RK  
**4191 SERIES**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

R Q P N	11-25-24 4-11-24 8-17-23 3-14-23	Revised Description Added ASME Removed Function Added ® to Speedi-Set	HS HS HS KK	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <h1 style="margin: 0;">4191 SERIES</h1>
REV.	DATE	DESCRIPTION	BY	CKD. BY			

# TERRAZZO FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

## ROUND NICKEL BRONZE TOP WITH TERRAZZO RECESS AND PUSH-ON SPEEDI-SET® OUTLET

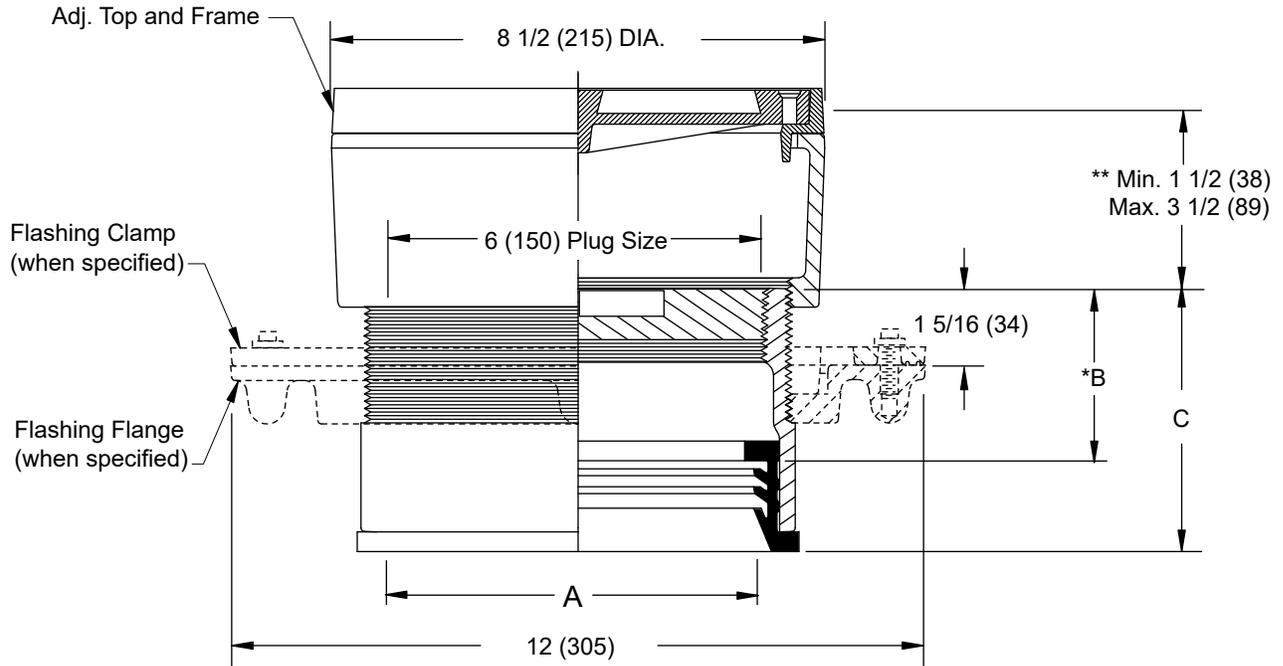

**SPEEDI-SET® OUTLET ▲**

"A" (Pipe Size) = 06(150) & 08(200)

Conforms to ASME A112.36.2/CSA B79.2

A SIZE	B	C
06(150)	*3(76)	4 9/16(117)
08(200)	*3 1/4(83)	4 13/16(121)

"TWIS-TO-FLOOR®" ADJUSTMENT  
 SPEEDI-SET® OUTLET ▲

Fig. 4193L.....Taper Thread - Bronze Plug

**REGULARLY FURNISHED:**

Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Secured Nickel Bronze Top with 1/2 (13) Terrazzo Recess.

**VARIATIONS:**

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

**▲ SPEEDI-SET® OUTLET**

- L Service Weight - For Service Weight and No Hub Cast Iron Pipe (Available for all pipe sizes)
- LXH Extra Heavy - For Extra Heavy Cast Iron Pipe (Available for all pipe sizes)
- LXH Extra Heavy - For PVC Pipe (Available for 2", 3", 4", and 8" pipe sizes only)
- LPVC Plastic Pipe - For PVC or ABS pipe (Available for 6" pipe size only)
- \* This Dimension to Internal Stop of Speedi-Set® Gasket.
- \*\* When Flange-F is specified Min. 1 1/8 (29) becomes 1 5/8 (41)

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER  
S4191BS

SIZE  
A

SCALE:  
NONE

DATE:  
5-5-06

APPROVED BY:  
CEL

CHECKED BY:  
CL

DRAWN BY:  
RN

4193

FIGURE NUMBER

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
E	11-25-24	Revised Description	HS	CL			4193
D	4-11-24	Added ASME Note	HS	CL			
C	8-17-23	Removed Function	HS	CL			
B	3-14-23	Added ® to Speedi-Set	KK	CL			