


P DRAWING NUMBER **S9725** SIZE **A** SCALE: **NONE** DATE: **PJ** APPROVED BY: **TD** CHECKED BY: **VG** DRAWN BY: **PJ**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

## 8 1/2" (215) ROUND ADJUSTABLE TOP

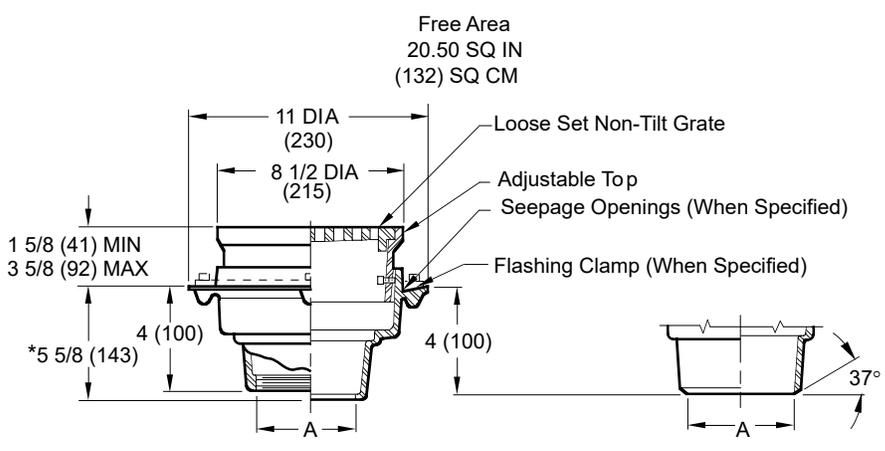

\*5 1/8"(130) for NO-HUB Outlet.

A (Pipe Size) 02(50), 03(75) or 04(100)

**Butt Weld Outlet**  
 Schedule 40 Regularly Furnished (Specify Schedule if Different -S05, -S10 or -S80)

- Fig. 9725BW ..... BUTT WELD OUTLET
- Fig. 9725C ..... CAULK OUTLET
- Fig. 9725T ..... THREADED OUTLET
- Fig. 9725Y ..... NO-HUB OUTLET

**REGULARLY FURNISHED:**

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body, Loose Set Non-Tilt Grate with Adjustable Top.

**VARIATIONS:**

- 4"(100) Extension -E04
- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- Closure Plug and Gasket Available in Stainless Steel -XPSS or Plastic -XPP
- Closure Plug with 3/4"(19) Test Plug -TP (Specify Material)
- Flashing Clamp with Seepage Holes -C
- Flat Bottom Strainer -FBS
- Satin Finish Top -SF
- Sediment Bucket -B
- Seepage Holes -WSH
- Solid Scoriated Cover -SC
- Vandal Proof Grate -U
- 90° Side Outlet (Specify Fig. 9759)
- 1/2" (13) Trap Primer Conn. -P050

**OPTIONAL MATERIALS:**

- A-27 Carbon Steel -A27
- Cast Iron Grate -CIG
- CF8M (Equivalent with Type 316) Stainless Steel -316
- Nickel Bronze Grate -NB
- Polished Bronze Grate -PB

**Design Pressures and Temperatures**

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

**NOTE:** Dimensions shown in parentheses are in millimeters.

**9725**

<b>REV.</b>	<b>DATE</b>	<b>DESCRIPTION</b>	<b>BY</b>	<b>CKD. BY</b>	<b>WEIGHT POUNDS</b>	<b>VOLUME CUBIC FEET</b>	<b>FIGURE NUMBER</b>
							<b>9725</b>