

M



**JAY R. SMITH MFG. CO.**  
 MEMBER OF MORRIS GROUP INTERNATIONAL  
 POST OFFICE BOX 3237  
 MONTGOMERY ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



MEMBER OF:

LOCATION

DRAWING NUMBER  
S2220SIZE  
ASCALE:  
NONEDATE:  
5-17-85APPROVED BY:  
TDCHECKED BY:  
TDDRAWN BY:  
BS

2220, 2225

FIGURE NUMBER

# FLOOR DRAINS

## WITH 8 1/2" (215) ROUND TOPS AND SEDIMENT BUCKETS

### "SAFE-SET®" BUCKET - WITH FLANGE

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard.  
 For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

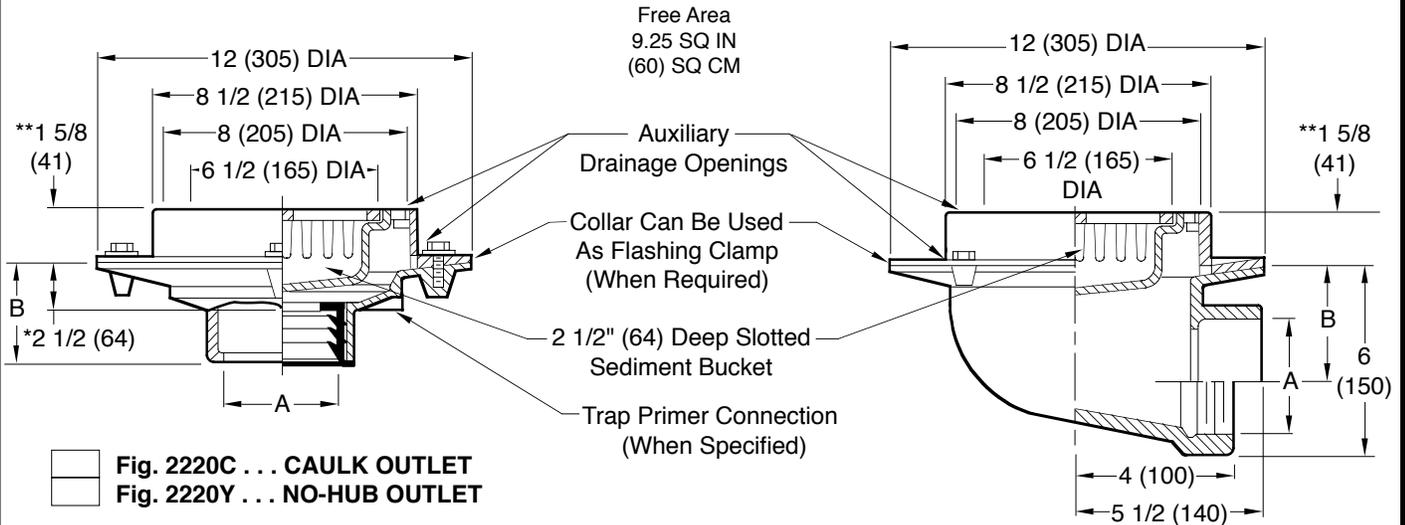


Fig. 2220C . . . CAULK OUTLET  
 Fig. 2220Y . . . NO-HUB OUTLET

A SIZE	02 (50)	03 (75)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set®,		3 3/4 (95) NO-HUB Only	
	2 (51) for Threaded			

Fig. 2225C . . . CAULK OUTLET  
 Fig. 2225T . . . THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

\*This dimension to internal stop of speedi-set® gasket

\*\*add 1/4" (6) when bronze top is specified.

#### REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Cast Iron ADA Grate and Sediment Bucket.

#### VARIATIONS:

- Closure Plug -XP (Fig. 2220 only)
- Dome Grate -D
- Hinged Grate -H
- L Speedi-Set® Service Weight (Fig. 2220 only)
- LXH Speedi-Set® Extra Heavy (Fig. 2220 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2225 only)
- Square Top -S
- \*  Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Grate -U
- Wide Flange Deck Drain (Specify Fig DX2565)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2220 Only)

#### OPTIONAL MATERIALS:

- Ductile Iron Bucket and Grate -MGB
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

\*Not available on Fig. 2220T threaded outlet drain.

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							<b>2220, 2225</b>



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov