

M

DRAWING NUMBER  
S2360

SIZE  
A

SCALE:  
NONE

DATE:  
5-17-85

APPROVED BY:  
TD

CHECKED BY:  
TD

DRAWN BY:  
PJ

FIGURE NUMBER  
**2360, 2365**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# FLOOR DRAINS

## WITH ADJUSTABLE TOPS AND SEDIMENT BUCKETS

### MEDIUM DUTY DRAINS WITH 12" (305) ROUND TOP - "SAFE-SET®" BUCKET

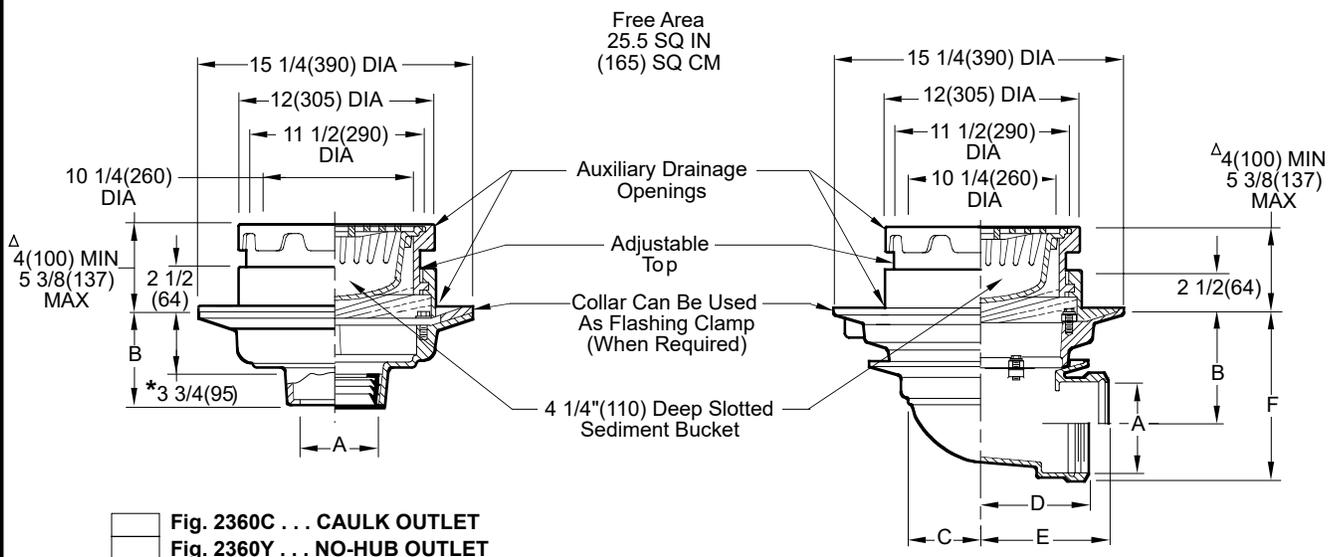


Fig. 2360C . . . CAULK OUTLET  
 Fig. 2360Y . . . NO-HUB OUTLET

Fig. 2365C . . . CAULK OUTLET  
 Fig. 2365T . . . THREADED OUTLET

A SIZE	02(50)	03(75)	04(100)	05(125)	06(150)
B	5(125) for Caulk, NO-HUB and Speedi-Set® 3 3/4(95) for Threaded				

**NOTE:** 02(50), 03(75), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

\*This Dimension to Internal Stop of Speedi-Set® Gasket

Δ add 5/16"(8) when bronze top is specified.  
 Δ add 7/8"(22) when hinged top is specified.  
 • Hinged grate not available in safe-set® design with suspended bucket. Full grate is provided with a free standing bucket

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)
E	10 (254)	9 3/4 (248)	9 5/8 (244)	10 (254)	7 3/4 (195)
F	8 5/8 (216)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body and Flashing Collar with Adjustable Top and Slotted ADA Grate with Sediment Bucket.

- VARIATIONS:**
- Adjustable Extension 4 1/2(115) to 6"(150) -E
  - Flat Bottom Strainer -FBS
  - Hinged Grate -H
  - L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only (Fig. 2360 only)
  - LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only (Fig. 2360 only)
  - NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2365 only)
  - Square Top -S
  - Vandal Proof Grate -U
  - T Threaded Outlet
  - Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2360 Only)

- OPTIONAL MATERIALS:**
- Ductile Iron Bucket & Grate -MBG
  - Galvanized Cast Iron -G
  - Nickel Bronze Top -NB
  - Polished Bronze Top -PB

**NOTE:** Dimensions shown in parentheses are in millimeters.

M	9-20-24	Revised Table	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <b>2360, 2365</b>
L	3-16-23	Revised Optional Materials	KK	CL			
K	2-23-23	Added "®" to Speedi-Set	KK	CL			
J	1-23-23	Added ADA	KK	JT			
REV.	DATE	DESCRIPTION	BY	CKD. BY			