

K



SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com

ASPE MEMBER OF:
 PDI
 ISO 9001

LOCATION

CLEANOUT TEES

WITH COUNTERSUNK PLUG AND ROUND ACCESS COVER

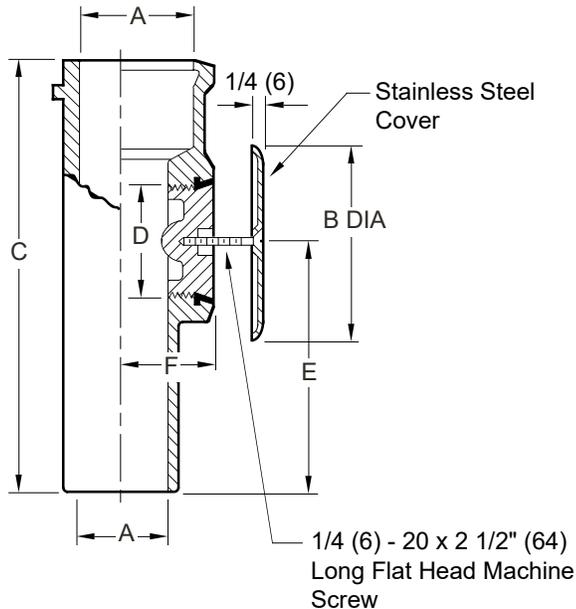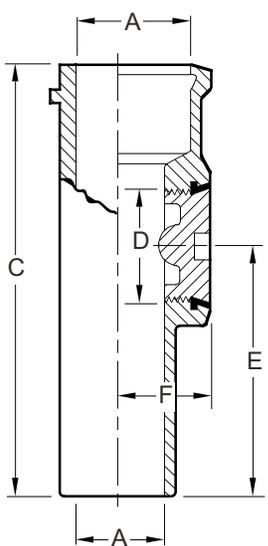

LESS COVER AND SCREW

WITH COVER AND SCREW

- Fig. 4510S GASKET SEAL - IRON PLUG
- Fig. 4511S GASKET SEAL - BRONZE PLUG
- Fig. 4512S TAPER THREAD - BRONZE PLUG
- Fig. 4530S
- Fig. 4531S
- Fig. 4532S

A SIZE	B DIA	C	D SIZE	E	F
02 (50)	4 1/4 (110)	10 1/2 (265)	1 1/2 (38)	6 1/4 (160)	2 (51)
03 (75)	5 1/2 (140)	11 3/4 (300)	2 1/2 (64)	7 (180)	2 1/2 (64)
04 (100)	5 1/2 (140)	12 (305)	3 1/2 (89)	7 (180)	3 (76)
06 (150)	9 1/4 (235)	16 (405)	6 (150)	9 (230)	4 1/2 (115)

* This Dimension becomes 15 (380) for the 4512 and 4532.

Spigot Outlet Sized for Service Weight and/or NO-HUB for 02(50) - 05(125) Sizes

REGULARLY FURNISHED:
 Duco Cast Iron Cleanout Tee and Countersunk Plug with Stainless Steel Round Cover and Screw as Indicated by Figure Number Selected.

- VARIATIONS:**
- Longer Center Screw (Specify Length)
 - "T" Handle Plug -TH (Plug Tapped 1/4" (6) -20 Thread)
 - Vandal Proof Screw -U (Fig. 4530 Series)
 - Y NO-HUB Both Ends 2(50), 3(75) & 4"(100) sizes only

- OPTIONAL MATERIALS:**
- Polished Bronze Cover -PB
 - Prime Coated Steel Cover -PC

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S4510

SIZE A

SCALE: NONE

DATE: 2-16-70

APPROVED BY: JM

CHECKED BY: RP

DRAWN BY: RK

4510, 4530 SERIES

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

K J H G	10-11-24 8-18-23 10-27-15 10-7-14	Revised Table Removed Function Rev. Table, Outlet Size, Var. Revised Variations	HS HS TBW TBW	CL CL BW BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4510 SERIES 4530 SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY			