

J
 DRAWING NUMBER S4440
 SIZE A
 SCALE: NONE
 DATE: 12-15-82
 APPROVED BY: SJM
 CHECKED BY: JD
 DRAWN BY: JD
 4440, 4441
 FIGURE NUMBER


SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com
 CUSTOMER DRIVEN SINCE 1926



LOCATION

CAULK FERRULE CLEANOUTS WITH FRAME AND COVER

TAPER THREAD PLUG WITH FRAME AND SCORIATED COVER

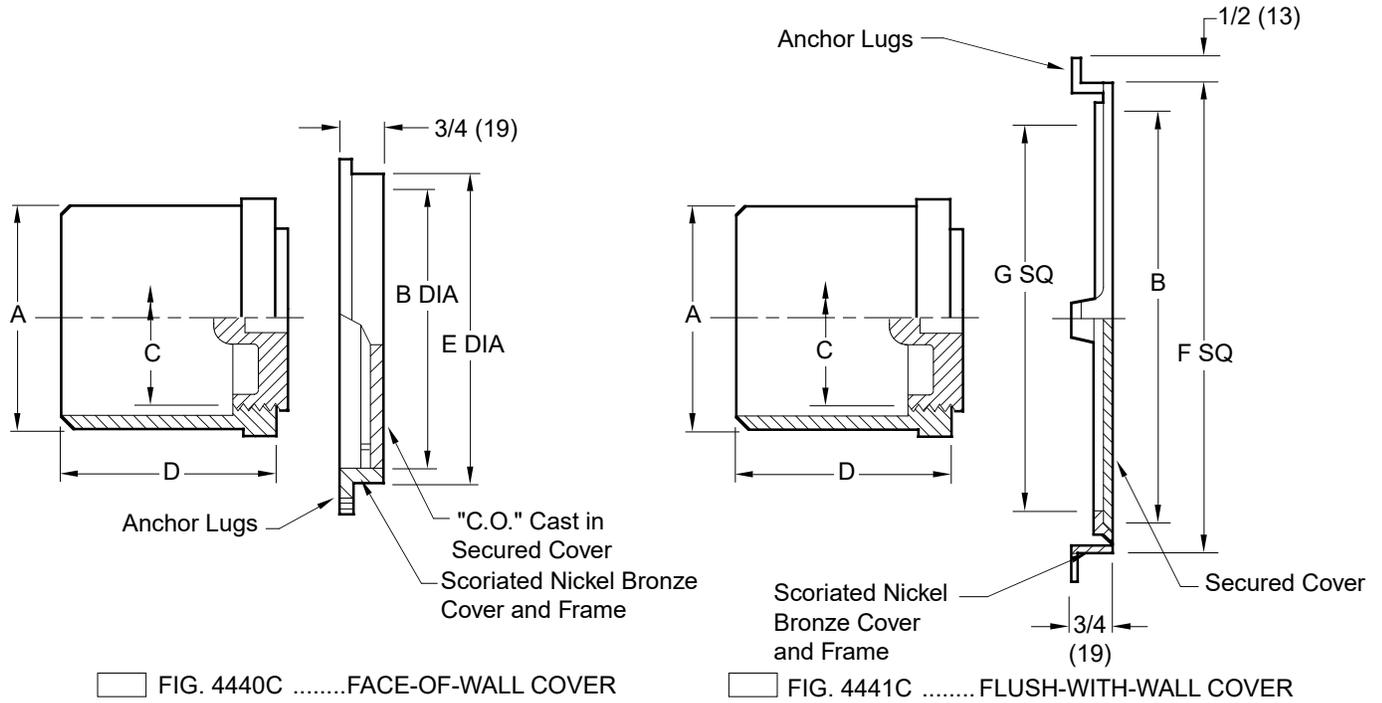

A SIZE	B OPENING		C SIZE	D	E DIA	F SQ	G SQ
	DIA	SQ					
▲ 02 (50)	4 (100)	6 x 6 (150) x (150)	1 1/2 (38)	3 1/2 (89)	4 1/2 (115)	7 (180)	5 1/2 (140)
▲ 03 (80)	5 1/2 (140)	6 x 6 (150) x (150)	2 1/2 (64)	3 3/4 (95)	5 3/4 (145)	7 (180)	5 1/2 (140)
▲ 04 (100)	6 (150)	6 x 6 (150) x (150)	3 1/2 (89)	4 1/4 (110)	6 1/2 (165)	7 (180)	5 1/2 (140)
05 (125)	6 (150)	8 x 8 (205) x (205)	4 1/2 (115)	4 1/4 (110)	6 1/2 (165)	9 (230)	7 1/2 (190)
06 (150)	8 (205)	8 x 8 (205) x (205)	5 1/2 (140)	4 1/4 (110)	8 1/2 (215)	9 (230)	7 1/2 (190)
08 (200)	10 (255)	10 x 10 (255) x (255)	7 1/2 (190)	4 1/2 (115)	10 1/2 (265)	11 (280)	9 1/2 (240)

▲ Sized for Service Weight and/or NO-HUB

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Caulk Ferrule with Cast Bronze Taper Thread Plug and Secured Scoriated Nickel Bronze Cover and Frame with Anchor Lugs. Type of Cover as Indicated by Figure Number Selected.

VARIATIONS:

- Cover Drilled in Center and Furnished with 1/4"(6)-20 x 2 1/2"(64) Long Screw
- Smooth Cover -SC
- "T" Handle Plug -TH
- Plug Tapped 1/4"(6) -20 Thread
- Vandal Proof Screws -U

OPTIONAL MATERIALS:

- Cast Bronze Body -BB
- Polished Bronze Frame and Cover -PB

J H G F	8-18-23 10-7-14 10-3-13 10-20-98	Removed Function Revised Variations Revised Function Revised S.W. and/or N.H	HS TBW TBW TBW	CL BW SJM JCS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4440, 4441
REV.	DATE	DESCRIPTION	BY	CKD. BY			