

Shower Series

BASE MODEL M-FS64 FOOT SHOWER

STANDARD FEATURES

- Chrome plated brass shower head with adjustable spray pattern
- Adjustable Valve timing from 5 to 60 seconds
- Pushbutton requiring less than 5 pounds for activation
- Vandal resistant stainless steel Access Panel
- Heavy duty, type 304 stainless steel housing
- Available polished to a #4 satin finish

SUGGESTED SPECIFICATIONS

Column Shower shall be Murdock model M-FS64, single station Foot Shower.

Pushbutton Shall be self closing requiring less than 5 pounds of force to activate the internally mounted pneumatic Metering Air-control Valve. Timing shall be adjustable from 5 to 60 seconds.

Showerhead shall be chrome plated brass with 1.6 GPM Flow Restrictor and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gauge type 304 stainless steel polish to a satin finish [Specify finish] with vandal resistant fasteners and shall include a 14 gauge stainless steel Bottom Plate, providing secure mounting for shower. 1/2" Expansion anchors and bolts shall be furnished.



Model M-FS64 Shown

MODEL:

(Must Specify)

- M-FS64 Satin Stainless Steel Foot Shower (Shown)
- M-FS65 Foot Shower, Green Powder Coat
- M-FS66 Foot Shower, Red Powder Coat
- M-FS67 Foot Shower, Blue Powder Coat

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- FRU1 Underground freeze-resistant valve ¹
- IAP In-ground anchor plate ¹
- LOGO Customer Specified logo ¹

Options Notes:

¹ See separate option submittal sheet for additional details.



Complies with the following standards:




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Shower Series
BASE MODEL M-FS64
FOOT SHOWER

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

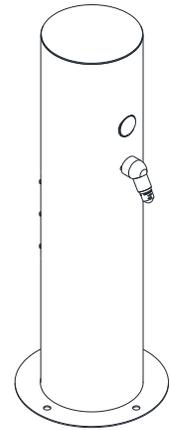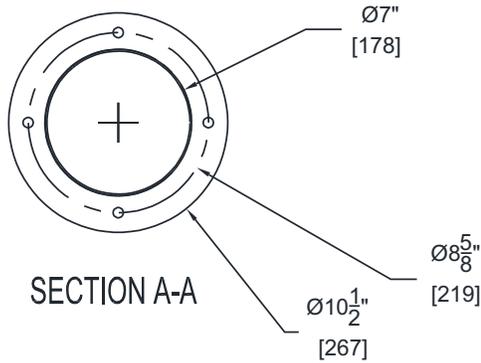

ISOMETRIC VIEW

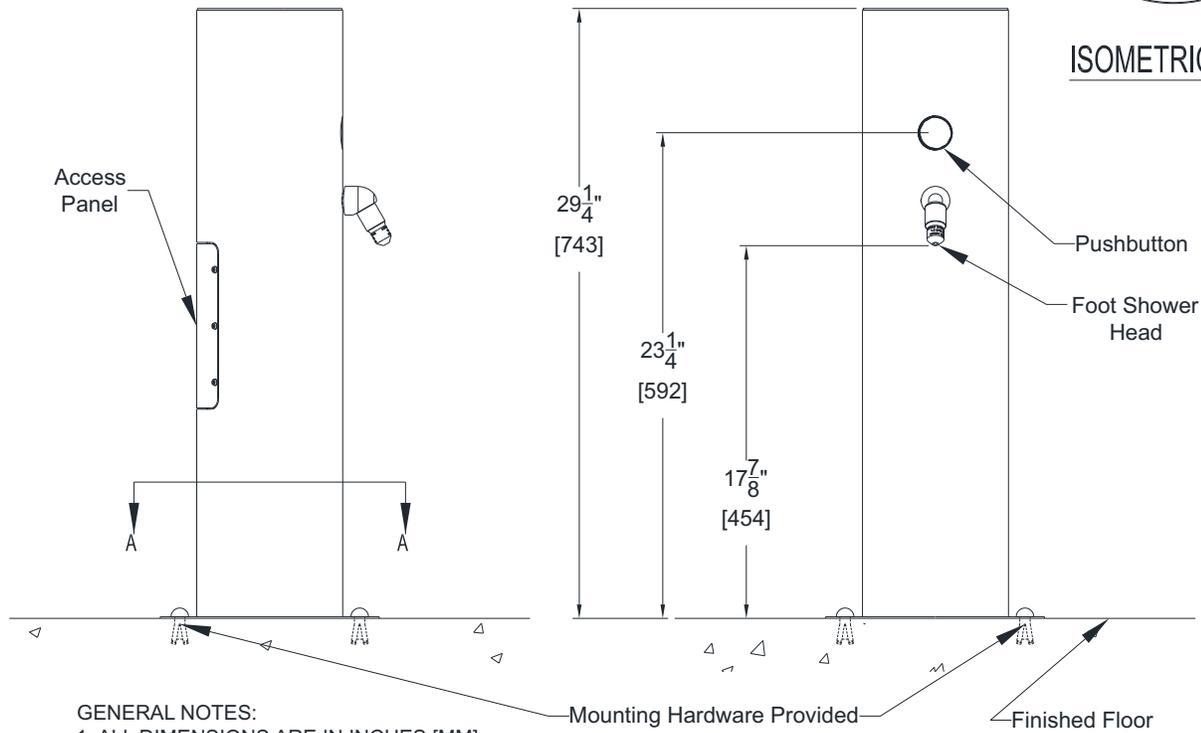

GENERAL NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM].

**SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufacturer's tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®, Please visit www.murdockmfg.com for most current specifications.