

REFERENCE DRAWINGS	
ASSEMBLIES	NUMBER
#2898 FLUSH VALVE ACCESS PANEL	9908-399-001

INSTALLATION INSTRUCTIONS:


- A- ROUGH-IN FOR THE FOLLOWING CONNECTIONS:
 - TOILET WASTE OUTLET ① 3" OD PLAIN END.
 - 3/4" NPT THREAD FLUSHING INLET CONNECTION ②.
- B- POSITION FIXTURE ③ INTO FLOOR.
- C- MAKE UP SUPPLY AND WASTE CONNECTIONS.

- D- INSTALL FLUSH VALVE. RECOMMENDED MAXIMUM DISTANCE IS 144".
- E- USE DRAWING NUMBER #9908-399-001 TO INSTALL WALL SLEEVE AND FLUSH VALVE ACCESS PANEL ④ SHOULD OPTIONAL 2898 FLUSH VALVE ACCESS PANEL BE REQUIRED.





ACORN ENGINEERING COMPANY
 P.O. BOX 3527 INDUSTRY, CA. 91744
 (626) 336-4561 FAX (626) 961-2200

TITLE SQUAT TOILET, MODEL #1698		
MANUFACTURE DATE JULY 2008 TO PRESENT	DATE ISSUED 02/16/10	DRAWING NUMBER 9925-059-001
	DATE REVISED	

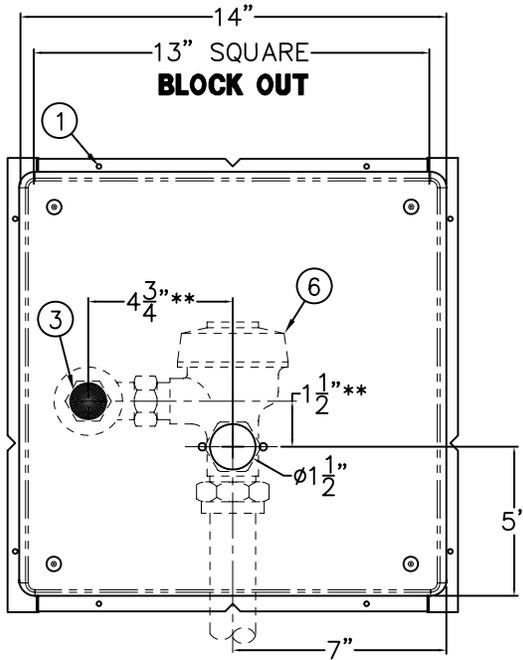

2898 LESS ESCUTCHEON

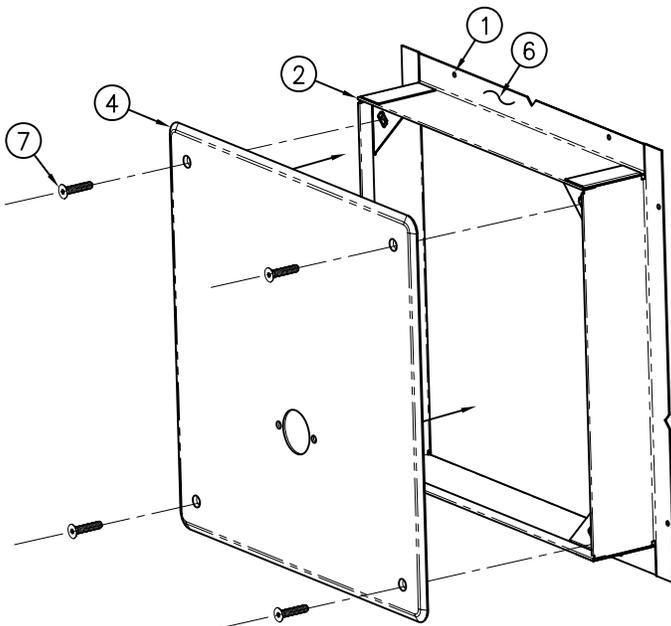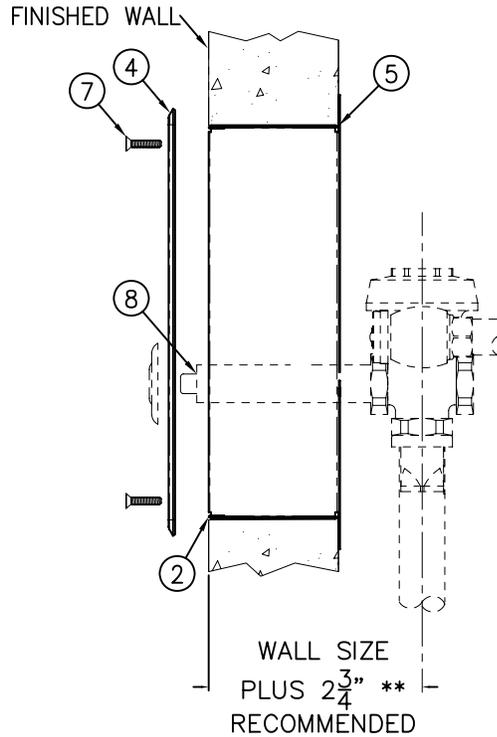

ROUGH-IN:

SLEEVES ARE INSTALLED IN FORMS (USING NAIL HOLES (1) PROVIDED) OR GROUTED INTO BLOCK WALLS, BECOMING A PERMANENT PART OF THE WALL. FRONT EDGE OF FRAME (2) SHOULD BE FLUSH WITH FINISHED WALL.

A-FLUSH VALVE INLET 1" NPT (3) TO DIMENSIONS SHOWN.

INSTALLATION INSTRUCTIONS:

- B- REMOVE STAINLESS STEEL PANEL (4).
- C- INSTALL SLEEVE FRAME WITH (5) FLANGE ON PIPE CHASE SIDE OF WALL.
- D- INSTALL FLUSH VALVE (6) PER MANUFACTURES INSTALLATION SHEETS.
- E- ATTACH (4) PANEL TO (2) FRAME WITH (4) 1/4"-20 x 1" (7) TAMPER-RESISTANT STAINLESS STEEL SCREWS PROVIDED. REFERENCE DRAWING NO. 9951-005-001
- F- COMPLETE INSTALLATION USING APPROPRIATE (8) PUSHBUTTON ASSEMBLY PER MANUFACTURERS INSTALLATION PROCEDURES.

**** NOTE:**

FLUSH VALVE BY OTHERS SHOWN FOR REFERENCE ONLY. COMPLETE WITH INSTALLER PROVIDED FLUSH VALVE AND APPROPRIATE PUSHBUTTON ASSEMBLY AS REQUIRED FOLLOWING RECOMMENDED MANUFACTURERS INSTALLATION PROCEDURES.



ACORN ENGINEERING COMPANY
P.O. BOX 3527 INDUSTRY, CA. 91744
(626) 336-4561 FAX (626) 961-2200

TITLE **FLUSH VALVE ACCESS PANEL MODEL 2898**

MANUFACTURE DATE
JANUARY 1973
TO PRESENT

DATE ISSUED
06/01/90
DATE REVISED
10/28/10

DRAWING NUMBER
9908-399-001