



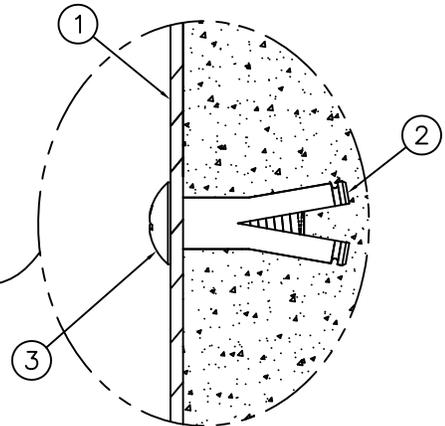


LOCATE ITEM TO CONFORM WITH APPLICABLE CODES FOR ACCESSIBILITY. 


IMPORTANT! AFTER INSTALLATION, ALL JOINTS REQUIRE SECURITY SEALANT BY INSTALLER TO ELIMINATE GAPS BETWEEN WALL AND FIXTURE.

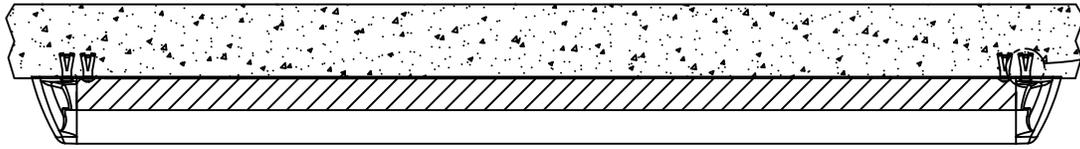

MOUNTING DETAIL

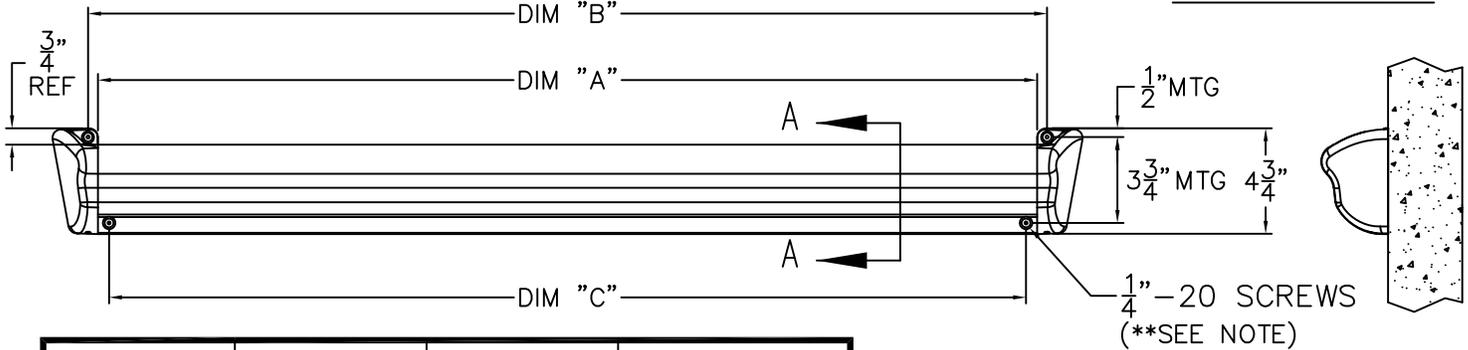


MODEL #	DIM "A"	DIM "B"	DIM "C"
D-GB18	18"	19"	17"
D-GB24	24"	25"	23"
D-GB30	30"	31"	29"
D-GB36	36"	37"	35"
D-GB42	42"	43"	41"
D-GB48	48"	49"	47"



INSTALLATION INSTRUCTIONS:

- A- ENSURE ADEQUATE IN-WALL BACKING EXISTS AT MOUNTING LOCATIONS TO SUPPORT LOAD OF 250 LBS. RECOMMENDED TO REFER TO LOCAL CODE REQUIREMENTS.
 - B- USE CHARTED MOUNTING DIMENSIONS IN FIXTURE ① AS A TEMPLATE TO LOCATE BACKING.
 - C- INSTALL WALL ANCHORS AS REQUIRED ② (BY OTHERS) TO SUIT WALL CONDITIONS.
 - D- FASTEN FIXTURE ① TO WALL USING 1/4"-20 UNC x 2" LONG MACHINE SCREWS ③ PROVIDED **
- ** NOTE: INSTALLER MAY OPT TO USE ALTERNATE MOUNTING SCREW TYPE TO SUIT WALL AND ANCHOR WHICH DIFFER FROM FASTENER PROVIDED.

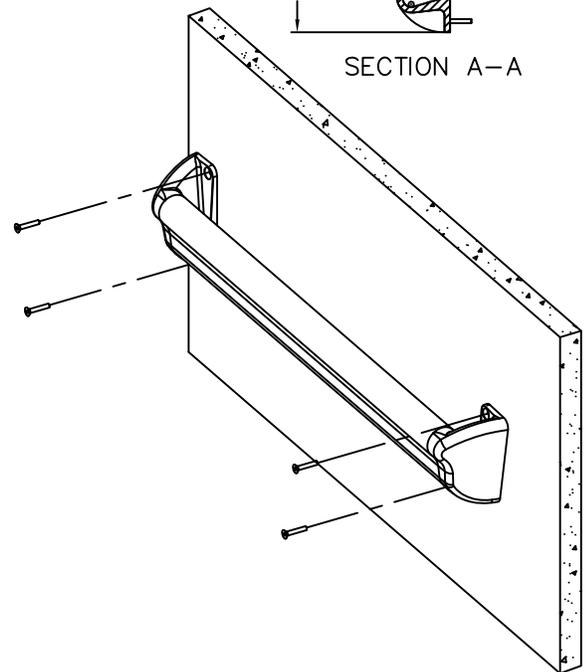

 WHITEHALL MANUFACTURING P.O. BOX 3527 Industry, CA 91744 15125 Proctor Ave Industry, CA 91746 (626) 968-6681 FAX (626) 855-4862	TITLE WHD-GB, LIGATURE RESISTANT GRAB BAR		
	MANUFACTURE DATE JUNE 2021 TO PRESENT	DATE ISSUED 06/17/21 DATE REVISED 09/19/25 C	DRAWING NUMBER 9918-300-001