
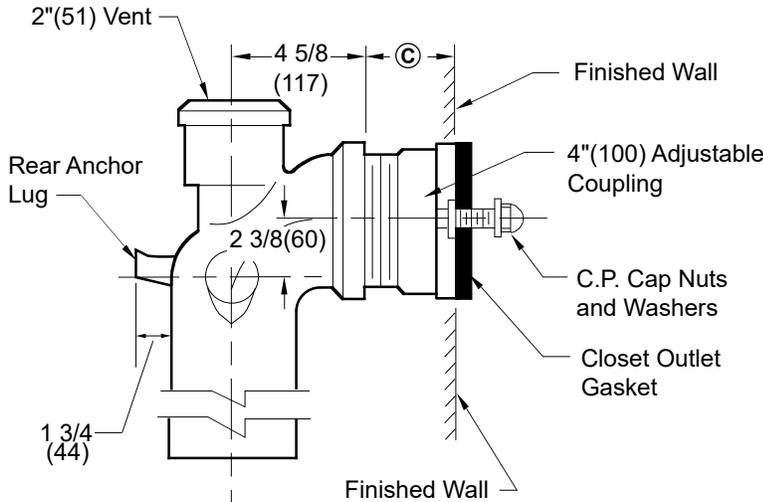


# INLET STACK FITTINGS FOR HUB AND SPIGOT SYSTEMS

## FOR USE WITH FLOOR MOUNTED BACK OUTLET WATER CLOSETS



**Fig. 0672 Side View**

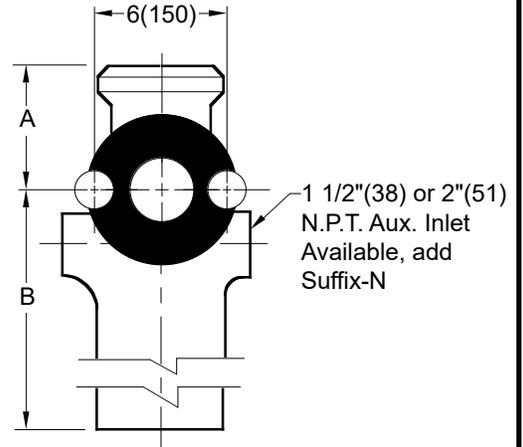

**Front View**

- Fig. 0672 . . . . . 04" (100) CAULK Long Barrel w/2" (51) Vent
- Fig. 0674 . . . . . 04" (100) CAULK Long Barrel w/4" (100) Vent
- Less Rear Anchor Lug

Fig. No.	Service		Weight		Threaded	
	A	B	A	B	A	B
0672	5(125)	8(205)	5(125)	6(150)		
0674	5 1/2(140)	8(205)	5 1/2(140)	6(150)		


© Dimension is regularly furnished 4" (100) long. Coupling provides 3/4" (19) adjustment in either direction.

**NOTE:** Dimensions shown in parentheses are in millimeters.


Conforms with ASME A112.6.1M.

The water closet gasket regularly furnished is designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

### TYPICAL APPLICATION



### OUTLET CONNECTIONS

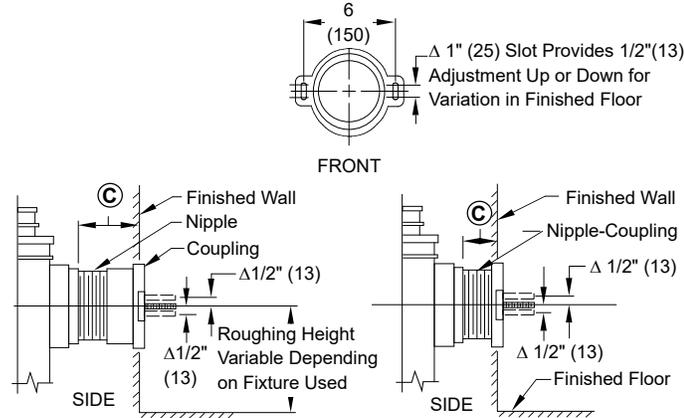

**REGULARLY FURNISHED**

**TYPE 2M (When Specified)**

### NIPPLE LENGTHS AVAILABLE

NIPPLE LENGTH	MIN © MAX	
	MIN	MAX
2M	1 (25)	3 (76)
*2 1/2 (64)	2 3/4 (70)	3 3/4 (95)
3 1/4 (83)	3 (76)	4 1/2 (115)
4 1/2 (115)	4 1/4 (110)	5 3/4 (145)
5 1/4 (135)	5 (125)	6 1/2 (165)
6 1/4 (160)	6 (150)	7 1/2 (190)
7 (180)	6 3/4 (170)	8 1/4 (210)
8 1/4 (210)	8 (205)	9 1/2 (240)
10 (255)	9 3/4 (250)	11 1/4 (285)
12 (305)	11 3/4 (300)	13 1/4 (335)
15 (380)	14 3/4 (375)	16 1/4 (415)
18 (455)	17 3/4 (450)	19 1/4 (490)

\* Regularly Furnished

DRAWING NUMBER: S0672  
 SIZE: A  
 SCALE: NONE  
 DATE: 10-7-70  
 APPROVED BY:  
 CHECKED BY: RP  
 DRAWN BY: RK  
 FIGURE NUMBER: 0672, 0674  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET
J	10-24-24	Revised Lengths	HS	CB		
G	4-17-24	Added ASME Note	HS	JT		
H	8-4-21	Added Rear Anchor Lug	KK	JM		
F	11-4-14	Removed 0672B/0674B	TBW	BW		

**FIGURE NUMBER**  
**0672, 0674**