


IMPORTANT: PRIOR TO INSTALLATION VERIFY GRAB BAR STYLE BEING USED. Grab bar style with closure plate may interfere affecting location of Access Panel. Verify site conditions, including toilet fixture. Whitehall Mfg. assumes no responsibility for specification of conflicting materials. Refer to ADA guidelines for complete installation requirements. Button should be located on the open side of the fixture with a maximum height of 48" AFF. Removable Panel is powder coated on both sides and may be reversed to suit requirements.

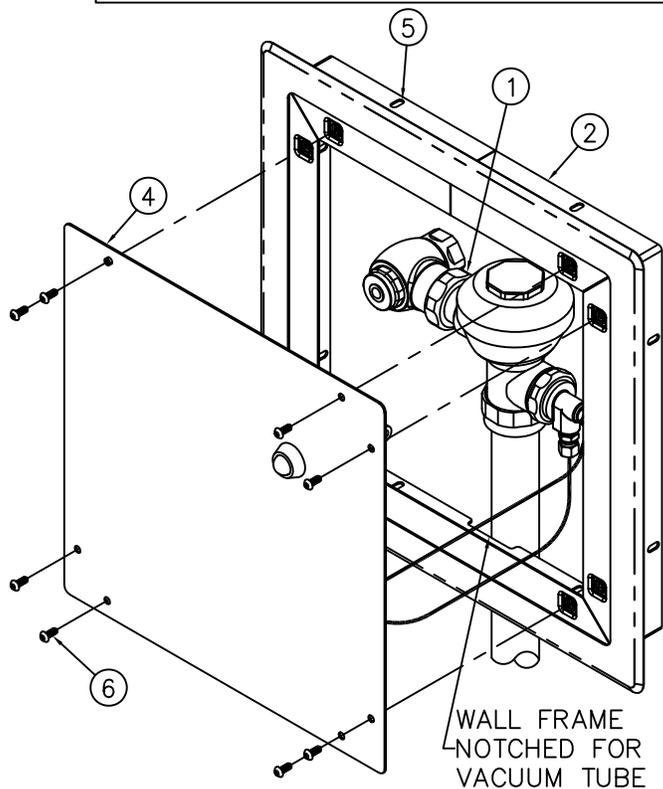

NOTES:

READ ALL INSTRUCTIONS THOROUGHLY. PANEL ASSEMBLY SHOULD NOT BE MOUNTED UNTIL FINISHED WALL HAS BEEN COMPLETED AND FIXTURE INSTALLED WITH HYDRAULIC FLUSH VALVE (1) PROVIDED. THE FLUSH VALVE ACCESS PANEL ASSEMBLY IS A FINISHED PRODUCT; EXERCISE CARE TO AVOID DAMAGING WALL FRAME/PANEL OR OTHERWISE MARRING POWDER COAT FINISH.

INSTALLATION INSTRUCTIONS:

- A-BLOCK OUT AND PROVIDE SUPPORT BACKING FOR WALL FRAME (2) USING BLOCKOUT DIMENSIONS (3) INDICATED. POSITION WALL FRAME (2) ON CENTERLINE OF FIXTURE WITH BOTTOM OF WALL FRAME 2-1/2" ABOVE INTEGRAL FLOOD RIM OR TOP OF URINAL.
- B-INSTALL FIXTURE AND CONCEALED HYDRAULIC FLUSH VALVE MAKING UP CONNECTIONS AS REQUIRED. REFER TO FIXTURE AND FLUSH VALVE MANUFACTURER INSTALLATION SHEETS FOR ADDITIONAL INFORMATION.
- C-REMOVE STAINLESS STEEL PANEL (4) AND INSTALL WALL FRAME (2) ONTO FINISH WALL. SECURE WITH ANCHORING HARDWARE PROVIDED BY THE INSTALLER THROUGH Ø1/4" x 1/2" LONG SLOTS (5) PROVIDED (8 PLACES).
- D-COMplete the installation by assembling panel (4) to installed wall frame (2) with hardware (6) provided.



WHITEHALL MANUFACTURING
P.O. BOX 3527 Industry, CA 91744
15125 Proctor Ave Industry, CA 91746
(626) 968-6681 FAX (626) 855-4862

TITLE **LIGATURE RESISTANT, FLUSH VALVE ACCESS PANEL, WH2898ADA-SL**

MANUFACTURE DATE
DECEMBER 2023
TO PRESENT

DATE ISSUED
02/02/2024
DATE REVISED
4/10/2024

DRAWING NUMBER
9918-019-001